

# E26 Bulb Indoor Luminaires

## Ceiling Mount – Pendant

### 120VAC / 60Hz

Model #: HOUPxxMBxx

## Safety Precautions

- Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in potentially fatal electric shock and/or property damage.
- It is recommended that a qualified electrician perform all the wiring. This fixture must be wired in accordance with all national and local electrical codes.
- Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.
- This fixture is designed for use in a 120VAC / 60Hz circuit.
- Make sure that the power source conforms to the requirements of the fixture. (See labels on the fixture housing).
- To reduce the risk of electrical shock, and to assure proper operation, this fixture must be adequately grounded. To accomplish proper grounding, there must be a separate ground wire (green) contact between this fixture and the ground connection of your main power supply panel.
- This fixture is intended to be used for general indoor lighting in dry or damp locations.

## Assembly Instructions

### Step 1 – Preparing for installation

- Disconnect electrical power** at the fuse or circuit breaker box before installing or servicing any part of this fixture.
- Carefully remove the fixture and hardware kit from the carton.
- Remove components from the hardware kit.
- Remove mounting bracket (1) from the fixture (3) by removing two barrel nuts (5).
- Install mounting bracket (1) to the 3-0 or 4-0 junction box (not included) using two screws (2) to secure it. Note: tighten the center two screws (6) to secure the cross-bar.
- The fixture is provided with 108" adjustable cord (8). To raise fixture frame from the floor to desired height by releasing the cable-locking cord on the side of strain relief connector (7) part of the fixture (3). Carefully push excess cord inside the canopy until desired length is achieved. Re-tighten cable-locking screw to secure it.

### Wiring – All wiring must take place inside the junction box (not included)

**Caution:** Make sure power is off at the fuse or circuit breaker box. Check power wires for damage or scrapes. Use wire suitable for at least 90°C (194°F). **Note:** Most dwellings built before 1985 have supply wire rated to 60°C. Consult a qualified electrician to ensure correct branch circuit conductor before installing.

### Step 2 – Wiring fixture

- Make all wire connections to appropriate wire. Secure with wire nuts (provided).
- Connect the green wire from the fixture to the supply source ground wire.
- Connect the black wire from the fixture to the black (L) wire from the supply power source.
- Connect the white wire from the fixture to the white (N) wire from the supply power source.
- Do not mix wires.** Pull on each wire lead to make sure connections are secure. Make certain no bare wires are exposed outside of wire connectors. Tuck all connections neatly into the junction box.

### Step 3 – Mounting fixture

- Install the fixture (3) by aligning bottom holes to the threaded studs (4) then using two barrel nuts (5) to secure it.

### Step 4 – Adjusting fixture height

- Adjust cord (8) length by loosening the strain relief screw (7) on the bottom of the canopy. Push the cord through the top of the canopy and re-tighten the screw once the fixture is at the desired height.


### Step 5 – Install shade

- Place the glass shade (11) over the socket then use two rubber washer (9) and two barrel screws (10) to secure it.

### Step 6 – Lamping

- Install medium base bulb, E26 (Type T10, 60W max. – not included) into the socket then gently turning clockwise until secure. Do not over tighten.

### Step 7 – Restore power at the fuse or circuit breaker box

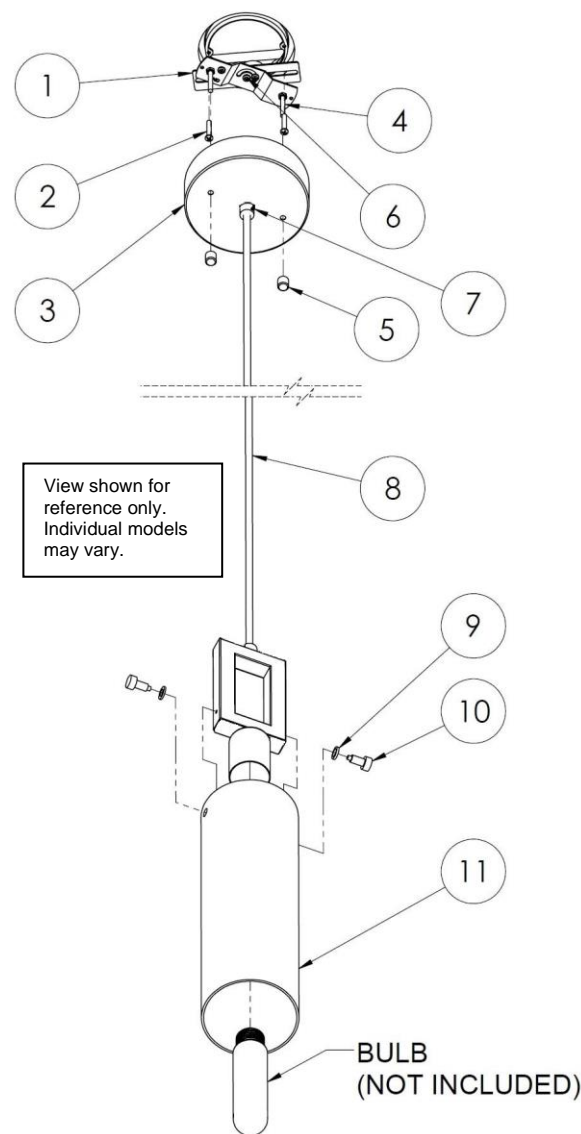

### Limited Factory Warranty

AFX Inc. hereby warrants that this fixture is free from defects in materials and workmanship when installed and used under normal operating conditions for a period of 2 years from date of purchase. This warranty covers all component parts and extends only to replacement of defective fixture or components; it does not cover failure due to improper installation, misuse, mishandling or damage incurred in transit.