
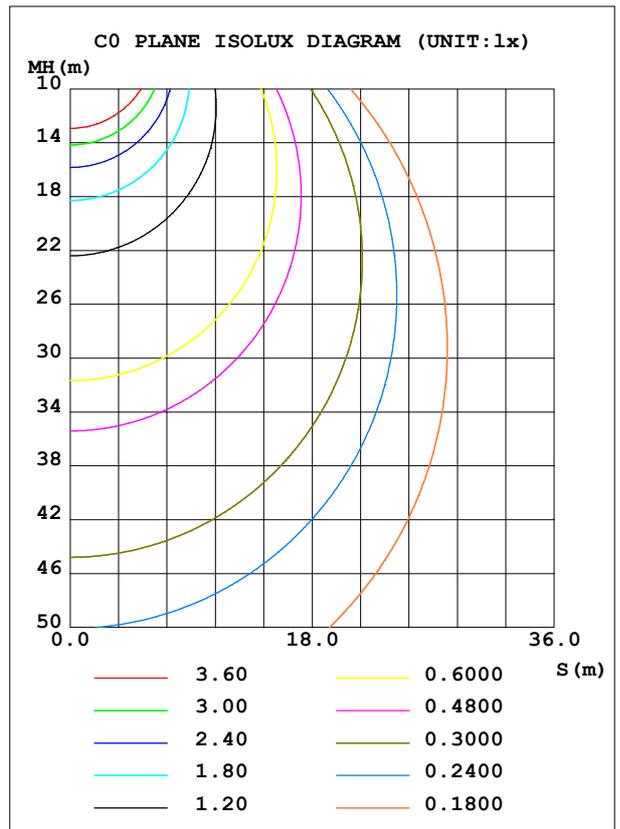


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 47.35 lm/W
MODEL		I _{max} (cd)	600.8	S/MH (C0/180)	1.25	
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE (V)	120-277	TOTAL FLUX (lm)	1725.8	η UP, DN (C0-180)	0.1, 50.1	
NOMINAL FLUX (lm)	1725.76	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 49.7	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	99.8	CIBSE SHR MAX	1.35	

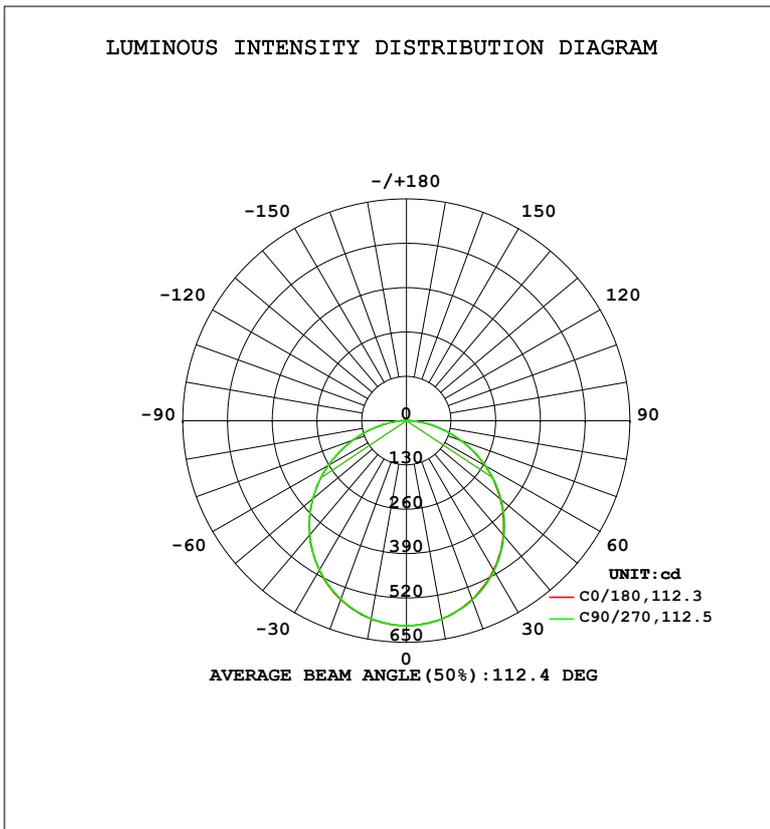

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2 °C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	589.9	590.8	590.9	590.4	590.1	589.3	589.1	589.6	0- 10	56.84	56.84	3.29,3.29
20	557.9	559.4	559.8	558.6	558.2	556.8	556.6	557.6	10- 20	162.7	219.6	12.7,12.7
30	506.9	508.9	509.2	507.6	506.5	504.9	505.1	506.4	20- 30	246.4	466.0	27,27
40	438.6	441.2	441.5	439.0	438.2	436.4	436.8	438.5	30- 40	297.0	763.0	44.2,44.2
50	356.7	359.6	359.8	356.8	355.5	354.0	354.7	356.6	40- 50	307.9	1071	62.1,62.1
60	264.7	267.4	267.0	263.9	262.4	261.1	262.0	264.5	50- 60	278.3	1349	78.2,78.2
70	166.9	169.3	168.4	165.2	163.8	162.4	163.9	166.5	60- 70	212.8	1562	90.5,90.5
80	73.82	75.35	74.22	71.16	69.97	68.93	70.60	73.42	70- 80	124.4	1686	97.7,97.7
90	2.175	2.236	1.676	1.017	0	0	0.1219	1.543	80- 90	36.23	1723	99.8,99.8
100	0	0	0	0	0.0896	0	0	0.0903	90-100	0.0757	1723	99.8,99.8
110	0.3583	0.2692	0.3594	0.2700	0.5381	0.5403	0.5390	0.6310	100-110	0.2492	1723	99.8,99.8
120	0.3583	0.2692	0.3594	0.2700	0.8078	0.8973	0.6289	1.080	110-120	0.4820	1724	99.9,99.9
130	0.3583	0.2692	0.3594	0.2700	0.9875	0.8973	0.8085	0.9902	120-130	0.5098	1724	99.9,99.9
140	0.4479	0.3589	0.3594	0.2700	1.164	0.8973	1.168	0.9902	130-140	0.4948	1725	99.9,99.9
150	0.8953	0.3589	0.3594	0.2700	1.164	0.8973	1.168	1.354	140-150	0.4806	1725	100,100
160	0.8061	0.3589	0.3594	0.2700	1.435	1.346	1.168	1.441	150-160	0.4072	1725	100,100
170	1.254	0.3589	0.3594	0.3606	1.254	1.256	1.168	1.350	160-170	0.2612	1726	100,100
180	1.254	0.8076	0.4492	1.260	1.254	0.6281	1.168	0.6301	170-180	0.0916	1726	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 918.13 lm

%lum = 53.2%

%lamp = 53.2%

Conical surface Flux(120deg): 1349.2 lm

%lum = 78.2%


%lamp = 78.2%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

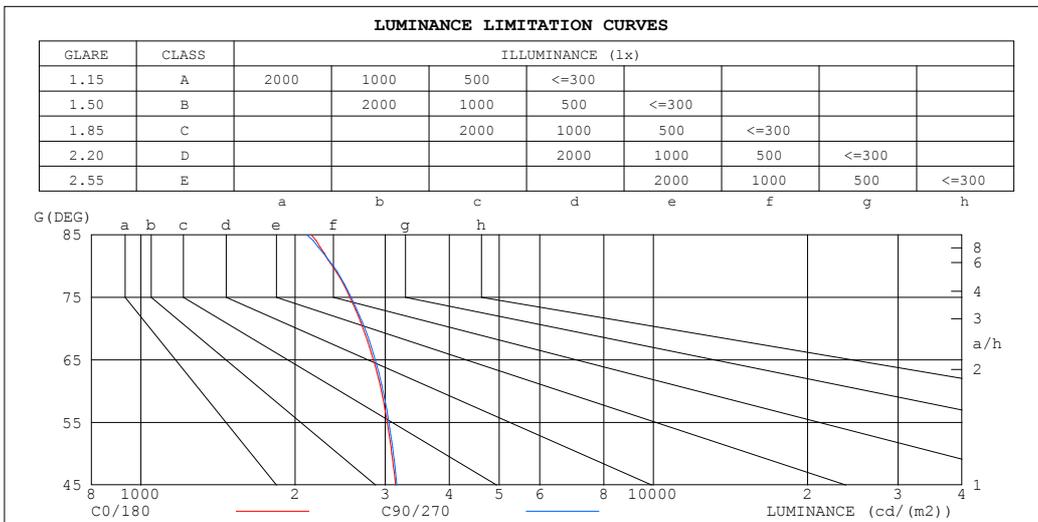

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2150	2108
80	2365	2374
75	2557	2573
70	2715	2736
65	2841	2867
60	2945	2966
55	3025	3047
50	3088	3109
45	3142	3160


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization (CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.62	.56	.52	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

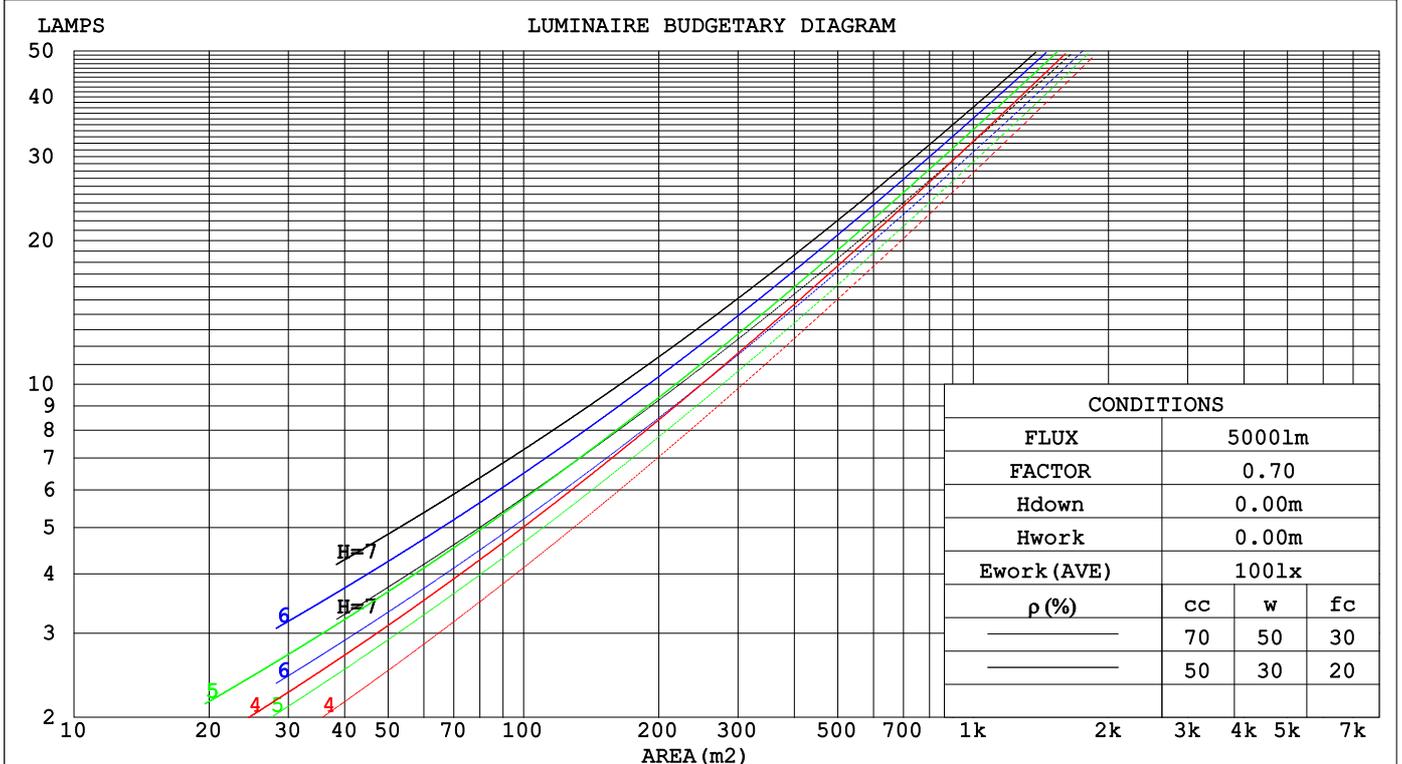

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

WEC AND CCEC

Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.306	.175	.055	.293	.168	.054	.280	.162	.052	.269	.156	.050	
2.0	.294	.161	.049	.287	.158	.049	.276	.153	.048	.265	.149	.046	.255	.144	.045	
3.0	.271	.144	.043	.266	.142	.043	.255	.138	.042	.246	.135	.041	.237	.131	.041	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.118	.034	.227	.116	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.199	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.172	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.157	.135	.156	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.075	.142	.100	.065	.098	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.088	.052	.094	.062	.036	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.048	.130	.080	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.124	.072	.035	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.081	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.131	.071	.030	.112	.062	.026	.078	.043	.019	.045	.025	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.7	18.3	17.0	18.5	18.7	16.8	18.3	17.0	18.5	18.7
3H	18.3	19.7	18.6	19.9	20.2	18.3	19.7	18.6	20.0	20.2
4H	18.9	20.3	19.2	20.5	20.8	19.0	20.3	19.3	20.5	20.8
6H	19.4	20.7	19.7	20.9	21.2	19.4	20.7	19.8	21.0	21.2
8H	19.5	20.8	19.9	21.1	21.3	19.6	20.8	19.9	21.1	21.4
12H	19.6	20.8	20.0	21.1	21.4	19.7	20.9	20.0	21.2	21.5
4H 2H	17.4	18.7	17.7	19.0	19.2	17.4	18.7	17.7	19.0	19.3
3H	19.1	20.3	19.5	20.6	20.9	19.1	20.3	19.5	20.6	20.9
4H	19.9	20.9	20.2	21.3	21.6	19.9	21.0	20.3	21.3	21.6
6H	20.5	21.4	20.9	21.8	22.1	20.5	21.5	20.9	21.8	22.2
8H	20.7	21.6	21.1	21.9	22.3	20.7	21.6	21.1	22.0	22.4
12H	20.8	21.7	21.3	22.0	22.5	20.9	21.7	21.3	22.1	22.5
8H 4H	20.1	21.0	20.6	21.4	21.8	20.2	21.1	20.6	21.4	21.8
6H	20.9	21.7	21.4	22.1	22.5	20.9	21.7	21.4	22.1	22.5
8H	21.2	21.9	21.7	22.3	22.8	21.2	21.9	21.7	22.3	22.8
12H	21.5	22.0	22.0	22.5	23.0	21.5	22.1	22.0	22.5	23.0
12H 4H	20.2	21.0	20.6	21.4	21.8	20.2	21.0	20.6	21.4	21.8
6H	21.0	21.6	21.4	22.1	22.5	21.0	21.7	21.5	22.1	22.6
8H	21.3	21.9	21.8	22.4	22.8	21.4	21.9	21.8	22.4	22.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.2	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.1 / - 0.3	+ 0.1 / - 0.3

CIE Pub.117, 1726 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.9)
Area: 0.18 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k (RI) x RCR = 5									
k = 0.60	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	74	64	57	72	65	56	49
1.25	83	72	65	81	72	65	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	91	86	78
4.00	106	100	96	104	98	94	99	95	91	83
5.00	108	104	99	106	102	98	101	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

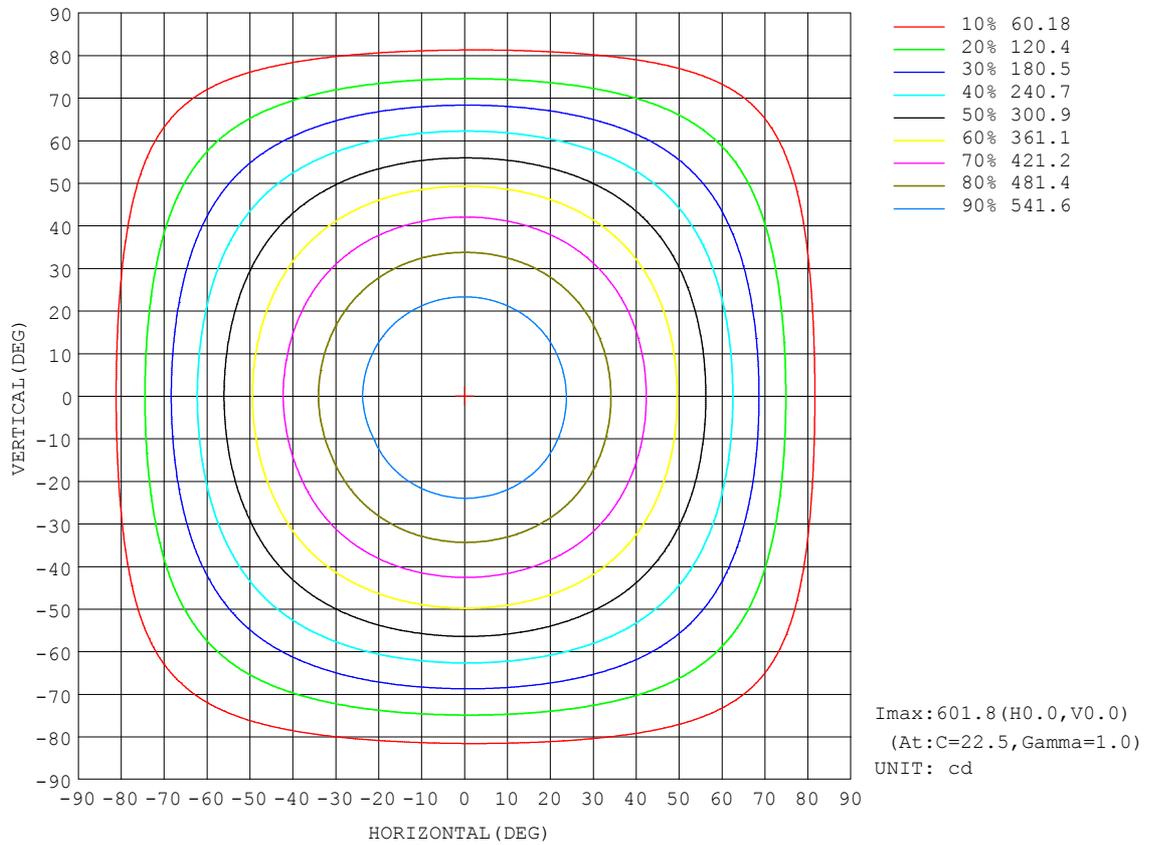


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

AAI Figure

Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Flux out:1271 lm

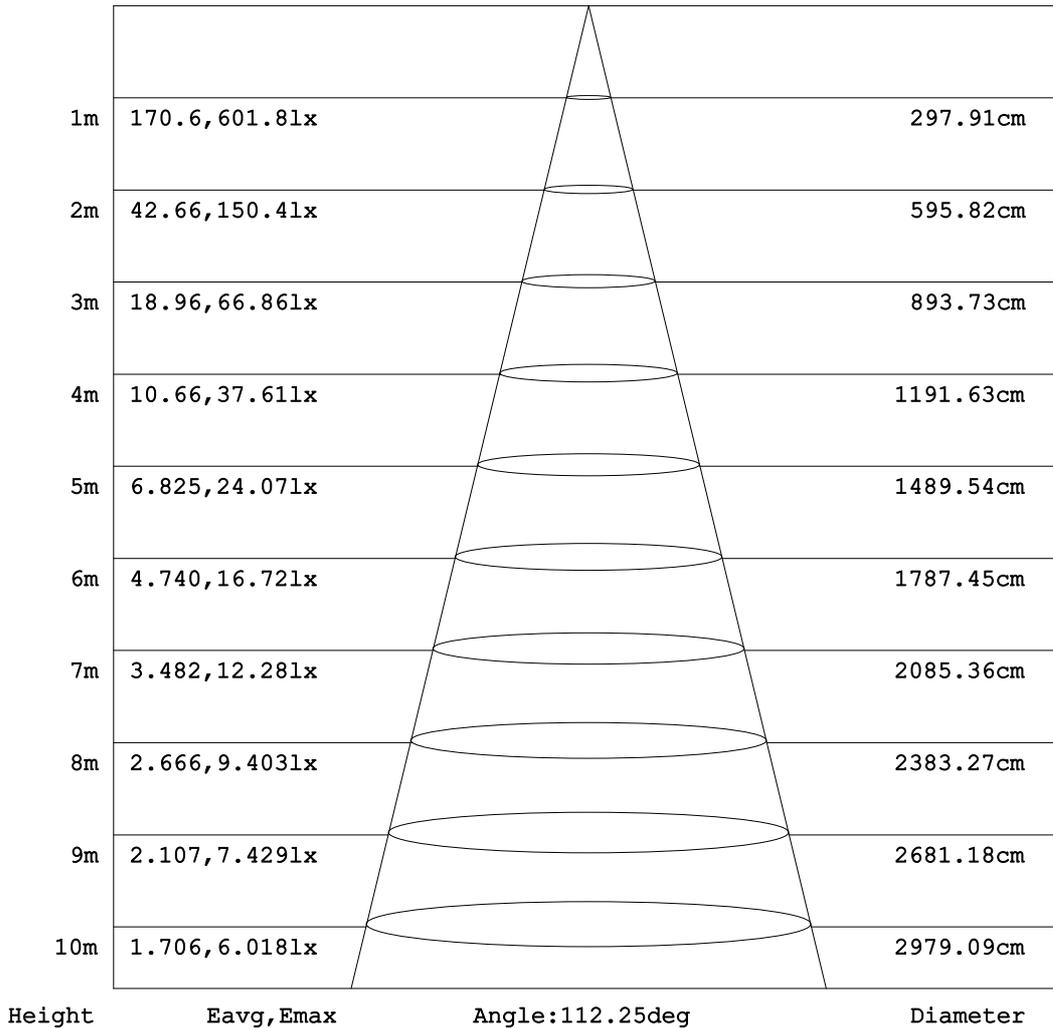


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

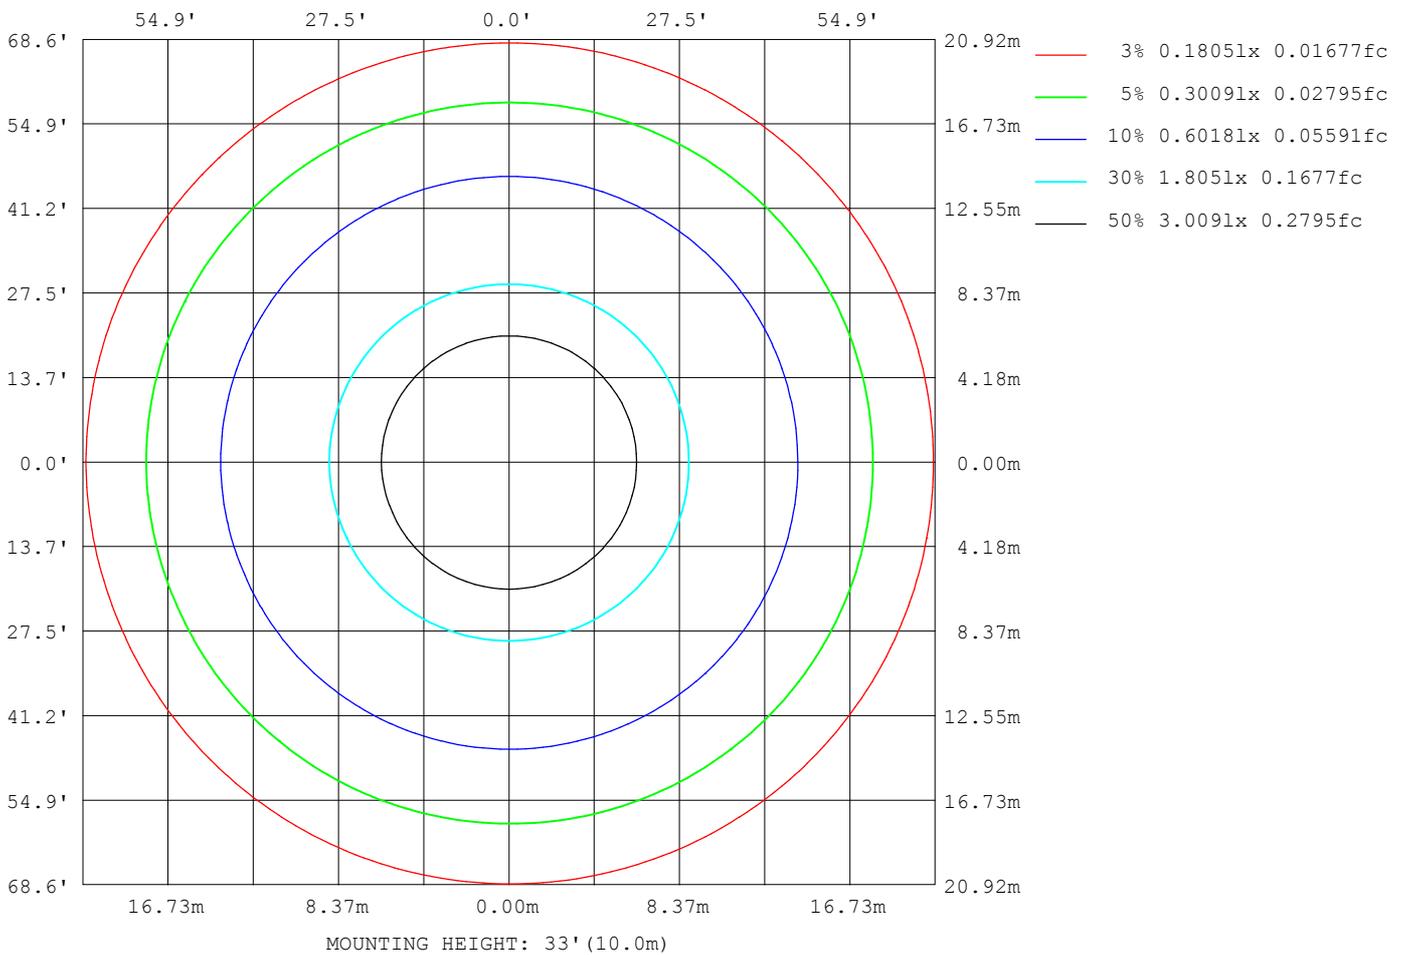

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

Planar Illuminance Curve

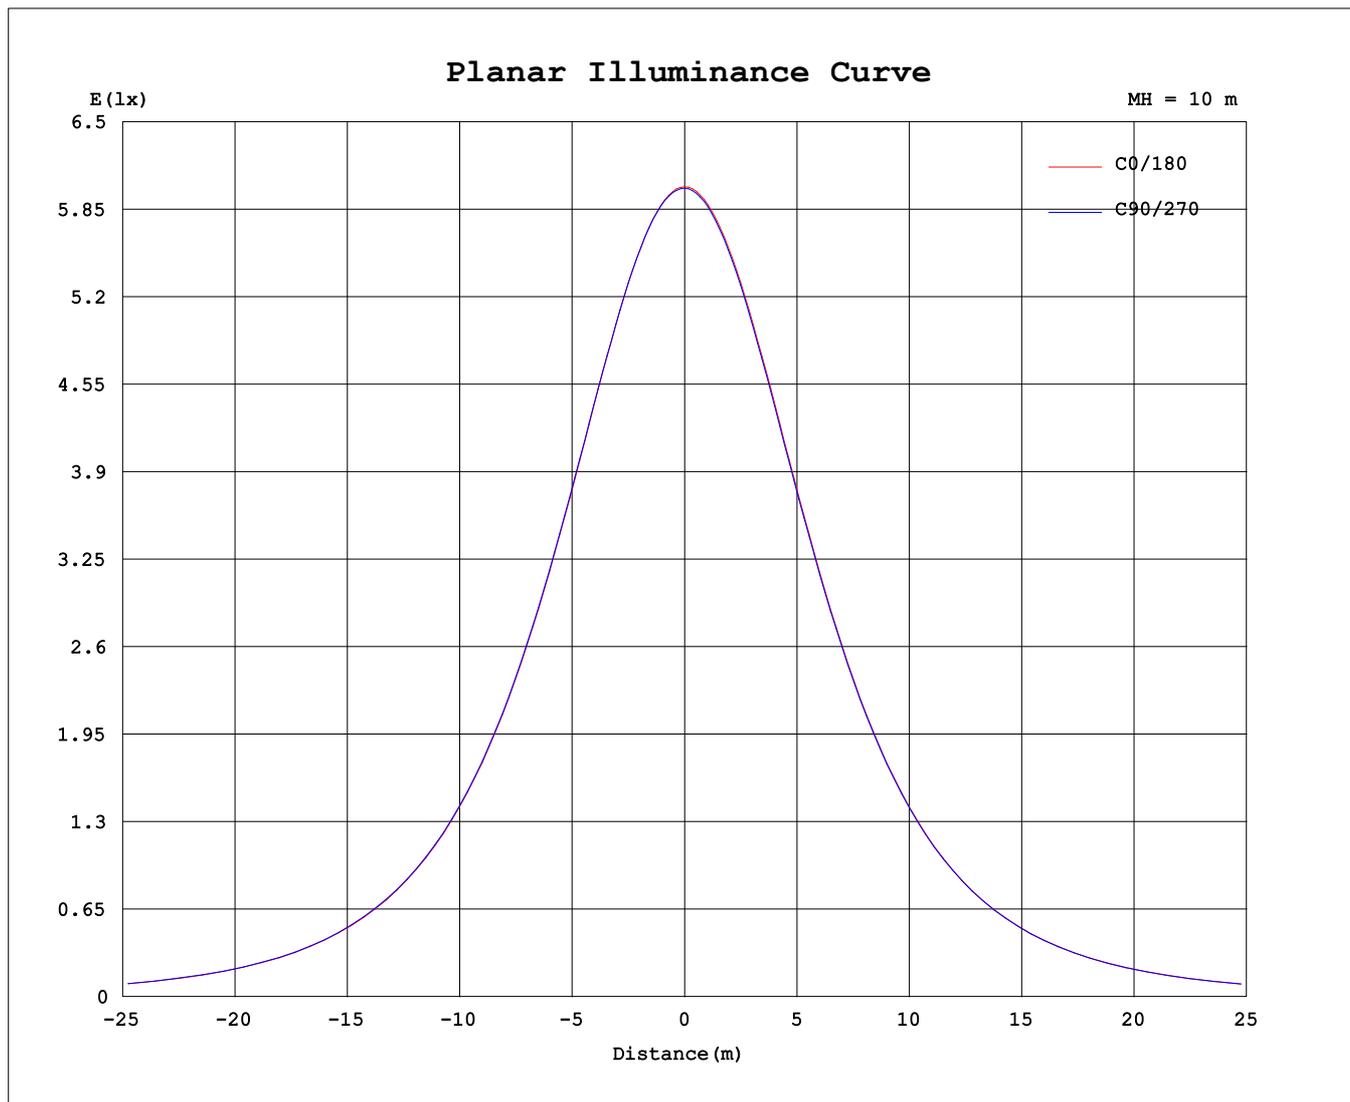

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.3066A P:36.45W PF:0.9894 Freq:60.01Hz Lamp Flux:1725.76x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	601	601	601	601	601	601	601	601	601	601	601	601	601	601	601	601			
5	598	598	598	599	598	599	598	598	598	598	598	598	598	598	598	598			
10	590	590	591	591	591	591	590	590	590	590	589	589	589	589	590	590			
15	576	577	578	578	578	577	577	576	577	576	576	576	576	576	576	577			
20	558	559	559	560	560	559	559	557	558	557	557	557	557	557	558	558			
25	535	536	536	537	537	536	535	534	535	534	533	533	533	534	534	535			
30	507	508	509	509	509	509	508	506	506	506	505	505	505	506	506	507			
35	475	476	477	477	477	477	475	474	474	473	472	473	473	473	474	475			
40	439	440	441	442	442	440	439	437	438	437	436	437	437	437	438	440			
45	399	401	402	403	402	401	400	398	398	397	397	397	397	398	399	400			
50	357	358	360	360	360	358	357	355	356	354	354	354	355	355	357	358			
55	312	313	315	315	315	313	312	309	310	309	309	309	309	310	312	313			
60	265	266	267	268	267	266	264	262	262	262	261	261	262	263	265	266			
65	216	217	219	219	218	217	215	213	213	212	212	212	213	214	215	217			
70	167	168	169	169	168	167	165	163	164	163	162	163	164	165	167	168			
75	119	120	121	121	120	119	117	115	115	114	114	115	116	117	118	120			
80	73.8	74.8	75.3	75.0	74.2	73.0	71.2	69.5	70.0	69.3	68.9	69.9	70.6	71.9	73.4	74.9			
85	33.7	34.5	34.8	34.2	33.1	32.0	30.5	29.0	29.8	29.3	29.1	29.9	30.7	32.0	33.6	34.9			
90	2.18	2.19	2.24	1.84	1.68	1.36	1.02	0.57	0.00	0.13	0.00	0.02	0.12	0.80	1.54	2.25			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	0.00	0.18	0.00	0.09	0.09	0.18			
105	0.45	0.36	0.26	0.18	0.00	0.09	0.00	0.27	0.27	0.27	0.27	0.18	0.27	0.54	0.54	0.36			
110	0.36	0.27	0.27	0.18	0.36	0.27	0.27	0.27	0.54	0.45	0.54	0.63	0.54	0.72	0.63	0.54			
115	0.36	0.27	0.27	0.27	0.36	0.27	0.27	0.27	0.54	0.54	0.81	0.63	0.63	0.63	0.90	0.72			
120	0.36	0.27	0.27	0.27	0.36	0.27	0.27	0.27	0.81	0.72	0.90	0.63	0.63	0.63	1.08	0.90			
125	0.36	0.27	0.27	0.27	0.36	0.27	0.27	0.27	0.90	0.90	0.90	0.63	0.81	0.63	0.99	1.08			
130	0.36	0.27	0.27	0.27	0.36	0.27	0.27	0.27	0.99	0.99	0.90	0.63	0.81	0.63	0.99	1.08			
135	0.36	0.36	0.27	0.27	0.36	0.27	0.27	0.27	1.07	1.08	0.90	0.90	0.81	0.72	0.99	1.08			
140	0.45	0.36	0.36	0.27	0.36	0.27	0.27	0.27	1.16	1.17	0.90	1.26	1.17	1.26	0.99	1.08			
145	0.54	0.45	0.36	0.45	0.36	0.54	0.27	0.27	1.16	1.17	0.90	1.26	1.17	1.26	0.99	1.08			
150	0.90	0.63	0.36	0.72	0.36	0.54	0.27	0.36	1.16	1.17	0.90	1.34	1.17	1.26	1.35	1.08			
155	0.81	0.63	0.36	0.72	0.36	0.54	0.27	0.36	1.16	1.17	1.35	1.44	1.17	1.44	1.44	1.17			
160	0.81	0.63	0.36	0.72	0.36	0.63	0.27	0.36	1.43	1.26	1.35	1.70	1.17	0.45	1.44	1.53			
165	0.89	0.63	0.36	0.81	0.36	0.63	0.27	0.36	1.61	1.26	1.35	1.62	1.17	0.45	1.35	1.53			
170	1.25	0.63	0.36	1.17	0.36	0.63	0.36	0.90	1.25	1.26	1.26	1.71	1.17	0.45	1.35	1.53			
175	1.25	0.63	0.72	1.17	0.36	0.63	1.44	1.26	1.25	1.26	0.63	1.26	1.17	0.45	0.63	1.26			
180	1.25	0.63	0.81	1.17	0.45	0.63	1.26	1.17	1.25	1.26	0.63	0.81	1.17	0.45	0.63	1.26			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks: