
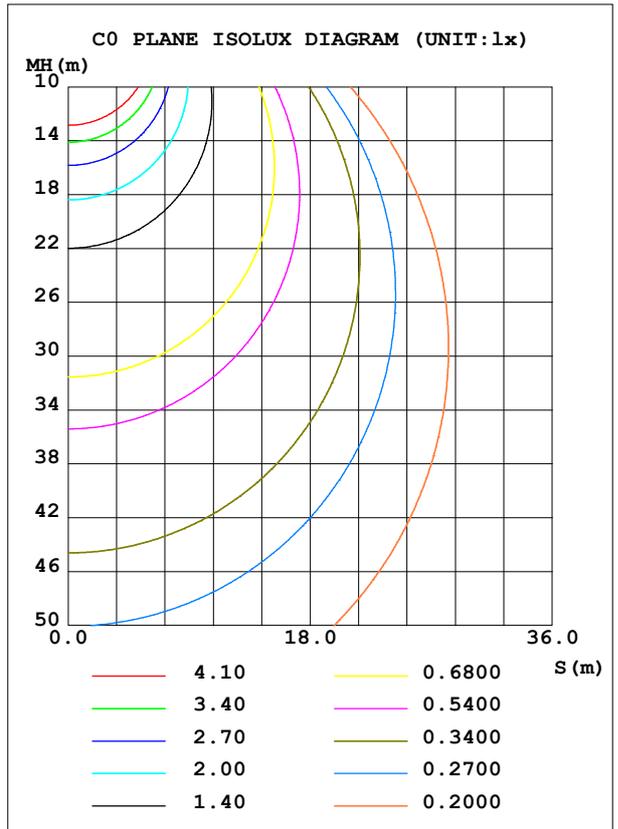


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 53.97 lm/W
MODEL		I _{max} (cd)	676.9	S/MH (C0/180)	1.25	
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE (V)	120-277	TOTAL FLUX (lm)	1943.5	η UP, DN (C0-180)	0.1, 50.1	
NOMINAL FLUX (lm)	1943.52	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 49.7	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	99.8	CIBSE SHR MAX	1.35	

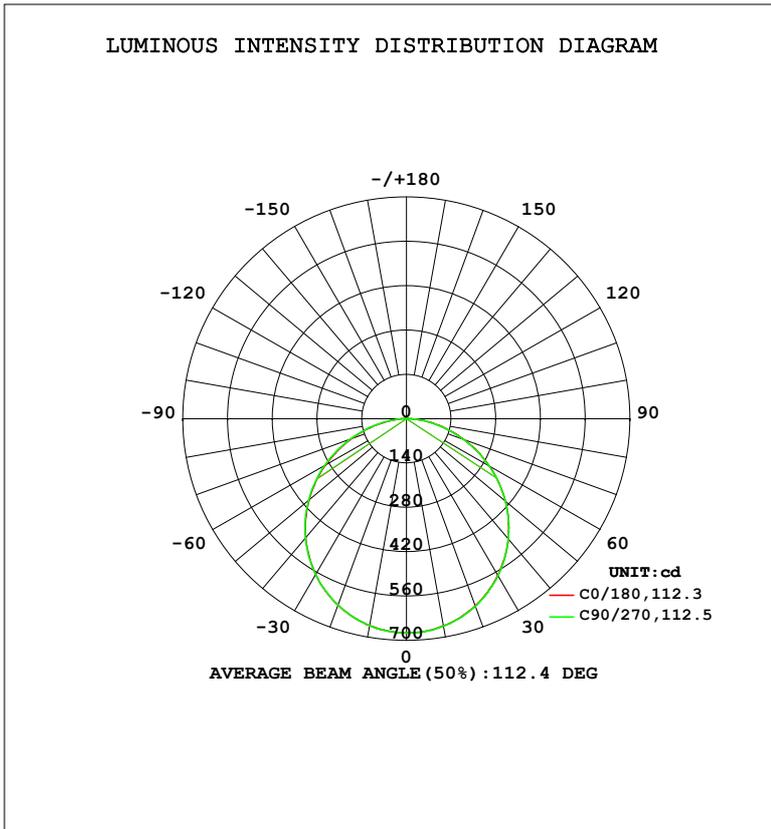

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2 °C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	664.7	665.9	665.2	664.1	663.6	663.4	663.4	664.1	0- 10	63.98	63.98	3.29,3.29
20	629.4	630.9	630.4	628.0	626.8	626.2	626.6	628.6	10- 20	183.2	247.1	12.7,12.7
30	571.9	574.0	573.0	570.2	568.1	567.4	568.6	571.3	20- 30	277.4	524.5	27,27
40	495.8	497.8	496.6	493.0	491.0	490.1	492.3	495.5	30- 40	334.3	858.8	44.2,44.2
50	404.2	405.7	404.3	400.1	398.0	397.3	399.8	404.1	40- 50	346.7	1205	62,62
60	300.4	301.8	299.9	295.4	293.0	292.8	295.9	300.2	50- 60	313.4	1519	78.1,78.1
70	190.5	191.3	189.0	184.4	181.9	181.8	185.2	189.6	60- 70	239.7	1758	90.5,90.5
80	85.51	85.65	82.76	78.68	76.66	76.74	79.97	84.46	70- 80	140.1	1899	97.7,97.7
90	3.400	2.893	1.822	0.9250	0	0.0453	0.5292	2.726	80- 90	41.00	1940	99.8,99.8
100	0	0	0	0	0.1817	0.0899	0.1778	0.1798	90-100	0.1122	1940	99.8,99.8
110	0.3591	0.2698	0.1798	0.3595	0.5390	0.6291	0.7202	0.7191	100-110	0.3108	1940	99.8,99.8
120	0.3591	0.2698	0.1798	0.3595	1.077	1.079	0.8089	1.260	110-120	0.5560	1941	99.8,99.8
130	0.5356	0.2698	0.1798	0.3595	1.257	1.169	0.8089	1.258	120-130	0.6052	1941	99.9,99.9
140	0.8964	0.5395	0.1798	0.3595	1.527	1.169	1.438	1.258	130-140	0.6301	1942	99.9,99.9
150	1.436	0.6295	0.1798	0.4494	1.526	1.169	1.438	1.528	140-150	0.6788	1943	99.9,99.9
160	1.256	0.6295	0.1798	0.4494	1.707	1.439	1.618	1.438	150-160	0.5528	1943	100,100
170	1.436	0.6295	0.6286	0.5381	1.706	1.349	1.438	1.348	160-170	0.3364	1943	100,100
180	1.436	1.439	1.165	1.348	1.436	1.259	1.438	1.258	170-180	0.1242	1944	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1033.5 lm

%lum = 53.2%

%lamp = 53.2%

Conical surface Flux(120deg): 1518.8 lm

%lum = 78.1%


%lamp = 78.1%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

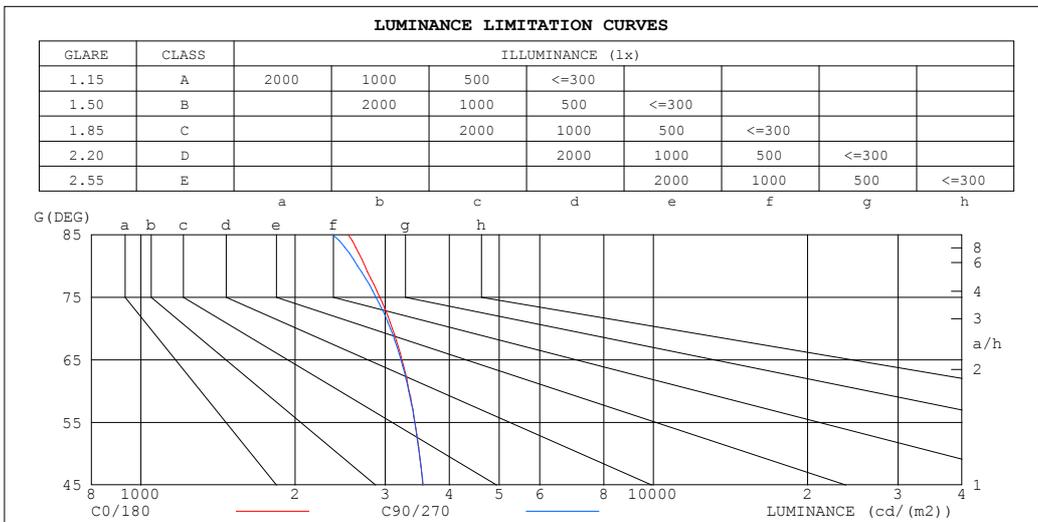

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2538	2369
80	2736	2647
75	2925	2876
70	3095	3070
65	3233	3219
60	3339	3332
55	3426	3425
50	3494	3494
45	3551	3553


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization (CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.62	.56	.52	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

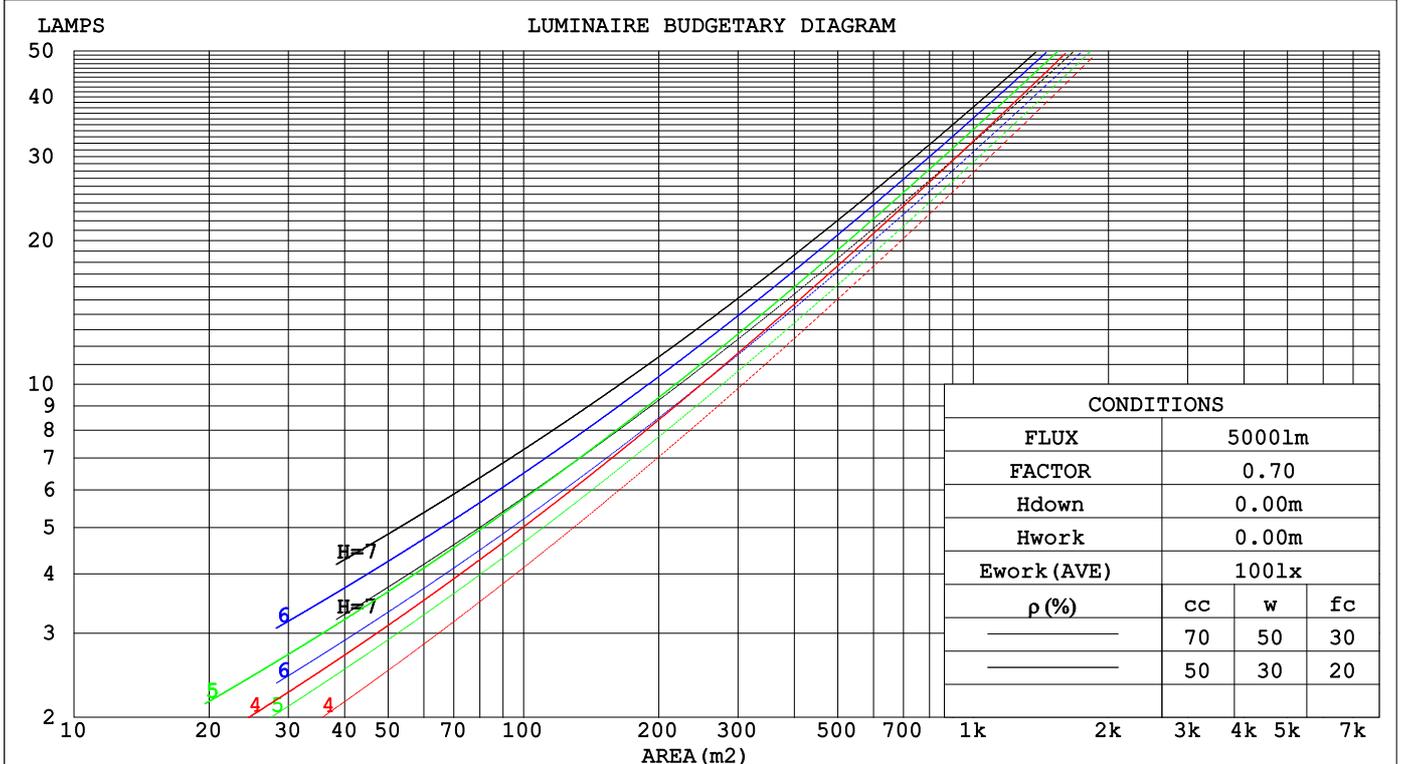

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

WEC AND CCEC

Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.306	.175	.055	.293	.168	.054	.280	.162	.052	.269	.156	.050	
2.0	.294	.161	.049	.288	.158	.049	.276	.153	.048	.265	.149	.046	.255	.144	.045	
3.0	.271	.144	.043	.266	.142	.043	.255	.138	.042	.246	.135	.041	.237	.131	.041	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.118	.034	.227	.116	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.199	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.172	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.135	.117	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.143	.100	.066	.098	.069	.046	.057	.041	.027	.018	.013	.009	
4.0	.159	.103	.060	.136	.089	.052	.094	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.035	.085	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.082	.047	.021	.047	.028	.013	.015	.009	.004	
8.0	.131	.071	.030	.113	.062	.026	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.066	.027	.107	.057	.023	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.2	18.7	17.5	18.9	19.1	17.2	18.7	17.4	18.9	19.1
3H	18.7	20.1	19.0	20.4	20.6	18.7	20.1	19.0	20.4	20.6
4H	19.4	20.7	19.7	21.0	21.2	19.3	20.7	19.7	20.9	21.2
6H	19.9	21.1	20.2	21.4	21.7	19.8	21.1	20.1	21.4	21.6
8H	20.0	21.3	20.4	21.5	21.8	20.0	21.2	20.3	21.5	21.8
12H	20.1	21.3	20.5	21.6	21.9	20.1	21.2	20.4	21.5	21.9
4H 2H	17.8	19.1	18.1	19.4	19.7	17.8	19.1	18.1	19.4	19.7
3H	19.5	20.7	19.9	21.0	21.3	19.5	20.7	19.9	21.0	21.3
4H	20.3	21.4	20.7	21.7	22.1	20.3	21.4	20.7	21.7	22.0
6H	20.9	21.9	21.3	22.2	22.6	20.9	21.8	21.3	22.2	22.6
8H	21.2	22.1	21.6	22.4	22.8	21.1	22.0	21.5	22.4	22.8
12H	21.3	22.2	21.8	22.5	23.0	21.3	22.1	21.7	22.5	22.9
8H 4H	20.6	21.5	21.0	21.9	22.3	20.6	21.5	21.0	21.8	22.2
6H	21.4	22.1	21.8	22.5	23.0	21.3	22.1	21.8	22.5	22.9
8H	21.7	22.4	22.2	22.8	23.3	21.7	22.3	22.1	22.7	23.2
12H	22.0	22.5	22.5	23.0	23.5	21.9	22.5	22.4	22.9	23.4
12H 4H	20.6	21.4	21.1	21.8	22.2	20.6	21.4	21.0	21.8	22.2
6H	21.5	22.1	21.9	22.5	23.0	21.4	22.1	21.9	22.5	23.0
8H	21.8	22.4	22.3	22.8	23.3	21.8	22.3	22.3	22.8	23.3

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.2	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.1 / - 0.3	+ 0.1 / - 0.3

CIE Pub.117, 1944 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.3)
Area: 0.18 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k (RI) x RCR = 5									
k = 0.60	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	91	86	78
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	99	106	102	98	101	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

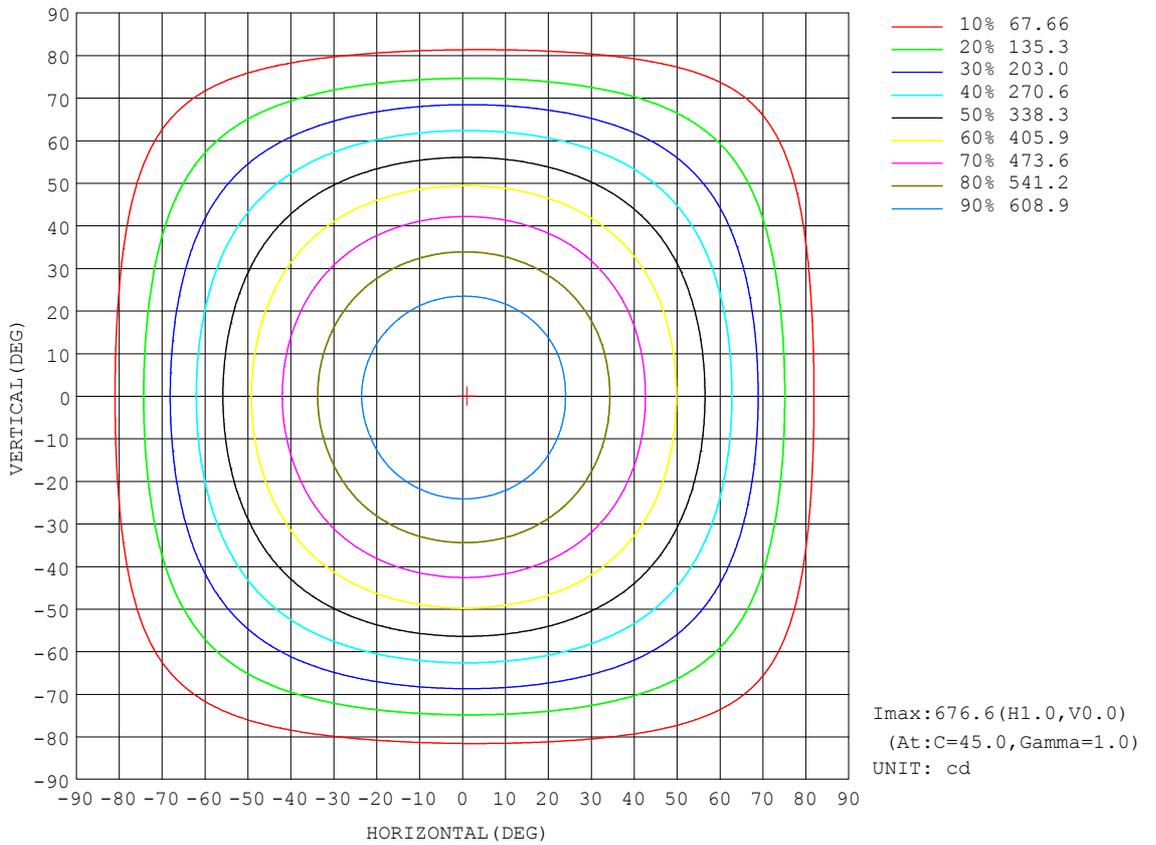


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

AAI Figure

Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Flux out:1431 lm

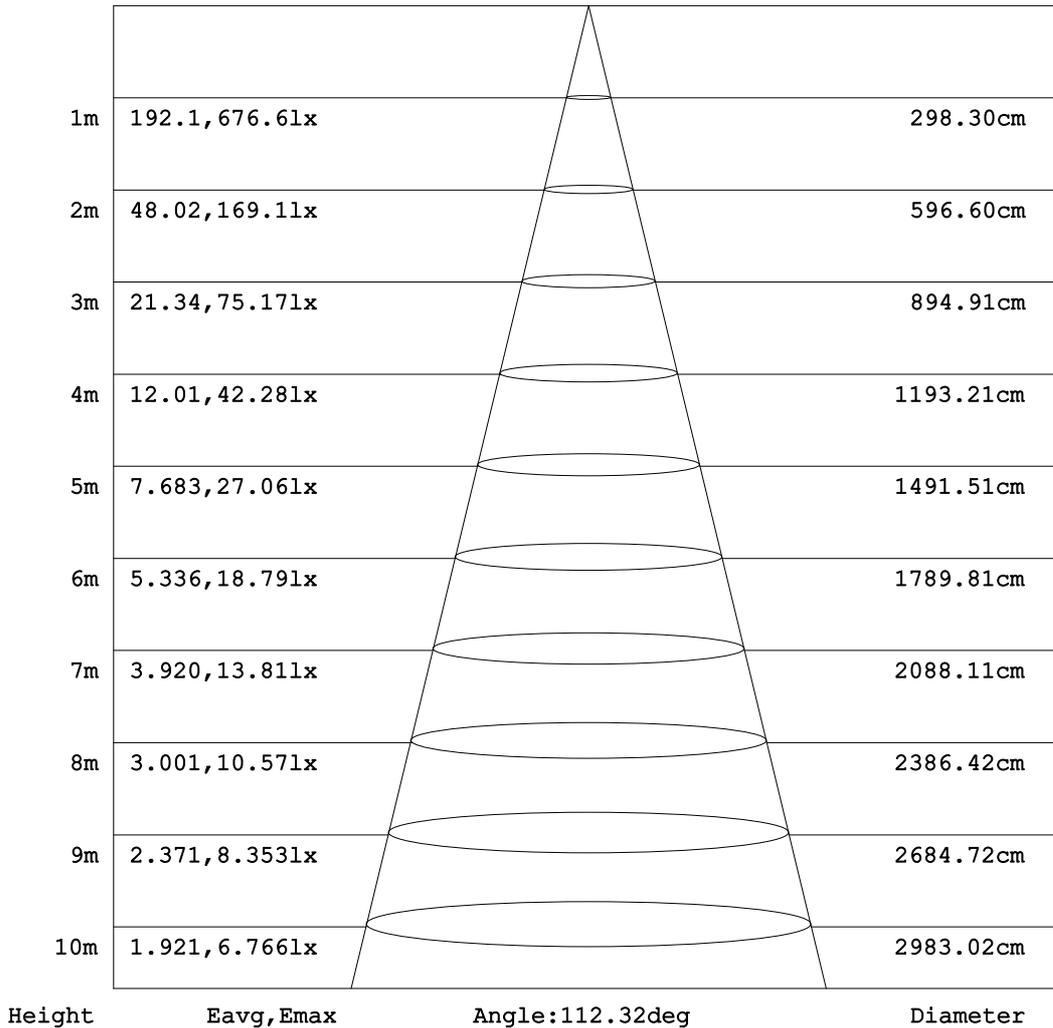


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

ISOLUX DIAGRAM


Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

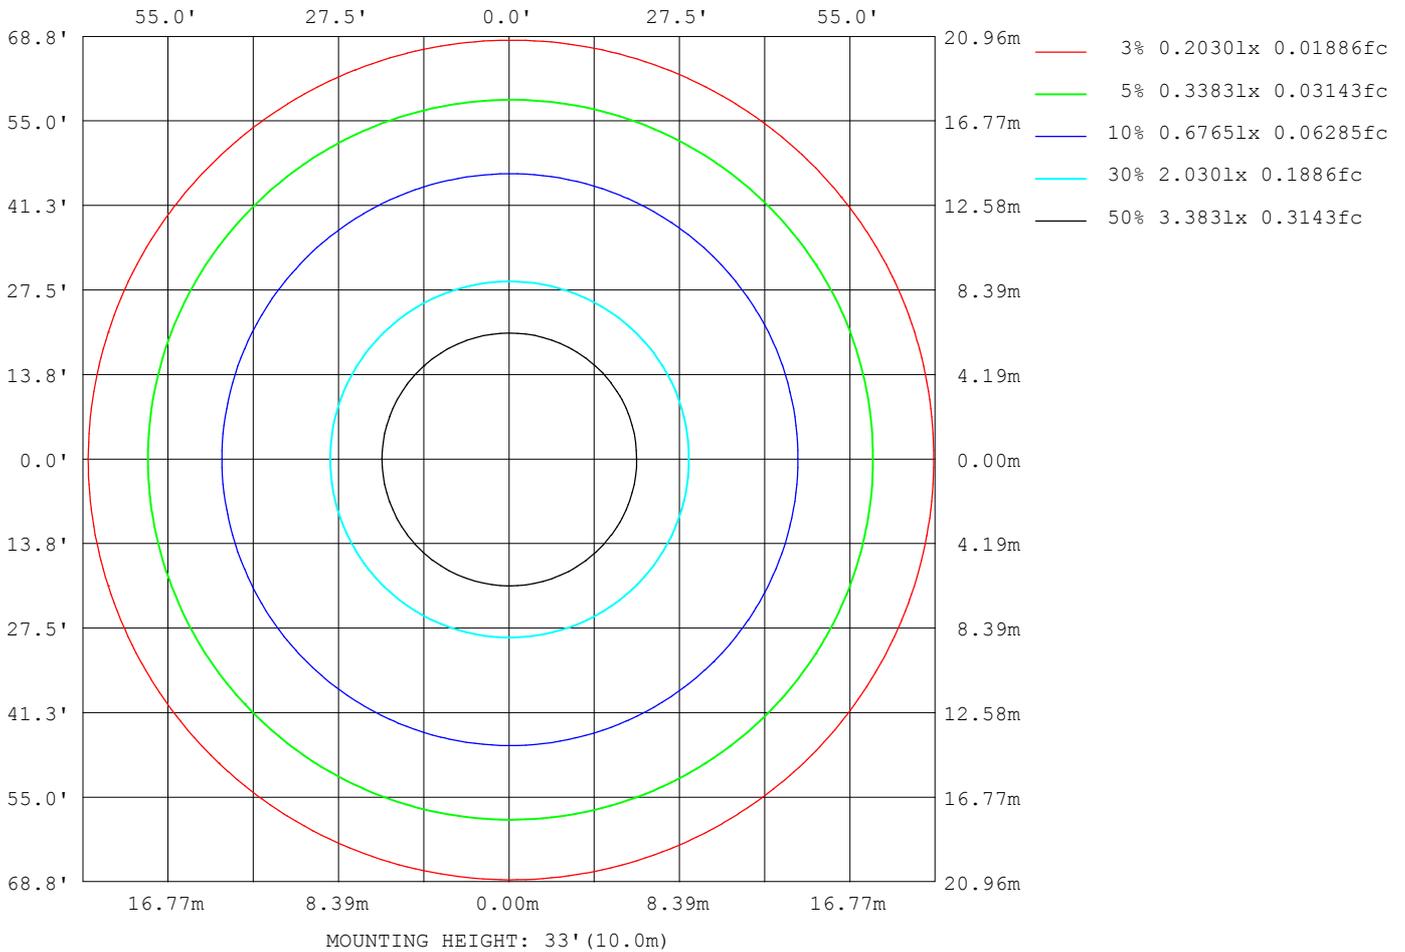

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

Planar Illuminance Curve

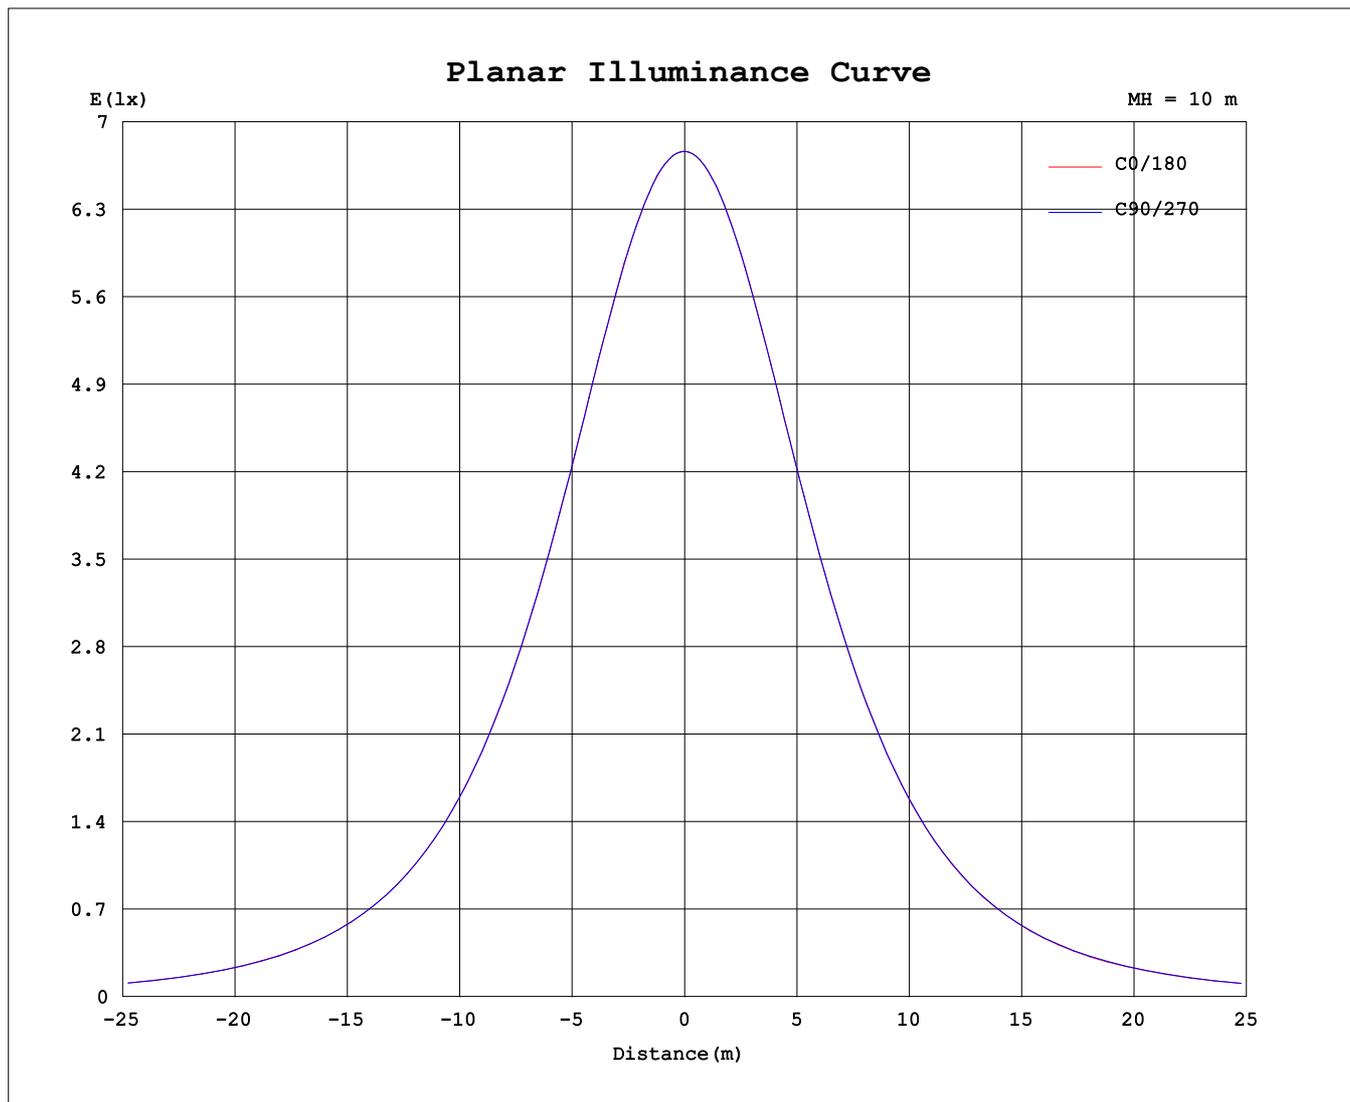

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Ethan
Test Date: 2022-05-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 26.000m [K=1.3807]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.3030A P:36.01W PF:0.9891 Freq:60.01Hz Lamp Flux:1943.52x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	676	676	676	676	676	676	676	676	676	676	676	676	676	676	676	676			
5	673	674	674	674	674	673	673	673	673	673	673	673	673	673	673	674			
10	665	665	666	665	665	664	664	663	664	663	663	663	663	663	664	665			
15	650	650	651	651	651	650	649	648	648	648	648	647	648	648	649	650			
20	629	630	631	630	630	629	628	627	627	626	626	626	627	627	629	629			
25	603	604	605	605	604	603	602	600	601	600	599	599	600	601	603	604			
30	572	573	574	574	573	572	570	568	568	567	567	568	569	570	571	573			
35	536	537	538	538	537	536	534	531	532	531	531	531	532	534	536	537			
40	496	497	498	497	497	495	493	490	491	490	490	491	492	493	496	497			
45	452	453	454	453	452	450	448	445	446	445	446	446	448	449	452	453			
50	404	405	406	405	404	402	400	398	398	397	397	398	400	402	404	406			
55	354	354	355	354	354	351	349	346	347	346	346	347	349	351	353	355			
60	300	301	302	301	300	298	295	293	293	293	293	294	296	298	300	302			
65	246	246	247	246	245	243	240	238	238	237	237	239	241	243	245	247			
70	191	191	191	190	189	187	184	182	182	182	182	183	185	187	190	192			
75	136	136	137	136	134	132	130	127	128	127	128	129	131	133	136	137			
80	85.5	85.8	85.7	84.4	82.8	80.9	78.7	76.4	76.7	76.4	76.7	78.1	80.0	82.2	84.5	86.4			
85	39.8	40.0	39.9	38.9	37.2	35.1	33.1	31.3	32.1	32.0	32.2	33.5	35.3	37.3	39.4	41.2			
90	3.40	3.26	2.89	2.35	1.82	1.30	0.93	0.48	0.00	0.00	0.05	0.05	0.53	1.49	2.73	3.73			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.09	0.09	0.09	0.18	0.09	0.18	0.27			
105	0.27	0.27	0.18	0.18	0.18	0.45	0.36	0.18	0.36	0.27	0.36	0.18	0.36	0.36	0.54	0.54			
110	0.36	0.36	0.27	0.27	0.18	0.36	0.36	0.27	0.54	0.45	0.63	0.72	0.72	0.63	0.72	0.63			
115	0.36	0.36	0.27	0.27	0.18	0.36	0.36	0.27	0.90	0.63	0.90	0.81	0.81	0.72	1.08	0.81			
120	0.36	0.36	0.27	0.27	0.18	0.36	0.36	0.27	1.08	0.81	1.08	0.81	0.81	0.72	1.26	1.17			
125	0.36	0.36	0.27	0.27	0.18	0.36	0.36	0.27	1.26	0.99	1.08	0.81	0.81	0.72	1.26	1.44			
130	0.54	0.36	0.27	0.27	0.18	0.36	0.36	0.27	1.26	1.26	1.17	0.81	0.81	0.72	1.26	1.62			
135	0.54	0.54	0.45	0.27	0.18	0.36	0.36	0.27	1.44	1.35	1.17	1.08	0.99	0.99	1.26	1.62			
140	0.90	0.63	0.54	0.54	0.18	0.45	0.36	0.54	1.53	1.62	1.17	1.44	1.44	1.53	1.26	1.62			
145	1.16	0.99	0.63	1.08	0.18	0.63	0.45	0.72	1.71	1.53	1.17	1.44	1.44	1.44	1.17	1.53			
150	1.44	1.08	0.63	1.35	0.18	1.26	0.45	0.81	1.53	1.53	1.17	1.62	1.44	1.44	1.53	1.44			
155	1.44	1.08	0.63	1.35	0.18	1.26	0.45	0.90	1.44	1.44	1.44	1.62	1.71	1.44	1.53	1.44			
160	1.26	1.08	0.63	1.44	0.18	1.26	0.45	0.90	1.71	1.53	1.44	1.53	1.62	0.90	1.44	1.44			
165	1.35	1.08	0.63	1.44	0.27	1.35	0.45	0.90	1.71	1.53	1.35	1.53	1.53	0.90	1.35	1.44			
170	1.44	1.08	0.63	1.44	0.63	1.44	0.54	1.53	1.71	1.53	1.35	1.53	1.44	0.90	1.35	1.44			
175	1.44	1.26	1.35	1.44	0.63	1.26	1.35	1.53	1.62	1.44	1.35	1.53	1.44	0.90	1.26	1.35			
180	1.44	1.26	1.44	1.44	1.17	1.26	1.35	1.35	1.44	1.44	1.26	1.44	1.44	0.90	1.26	1.35			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks: