
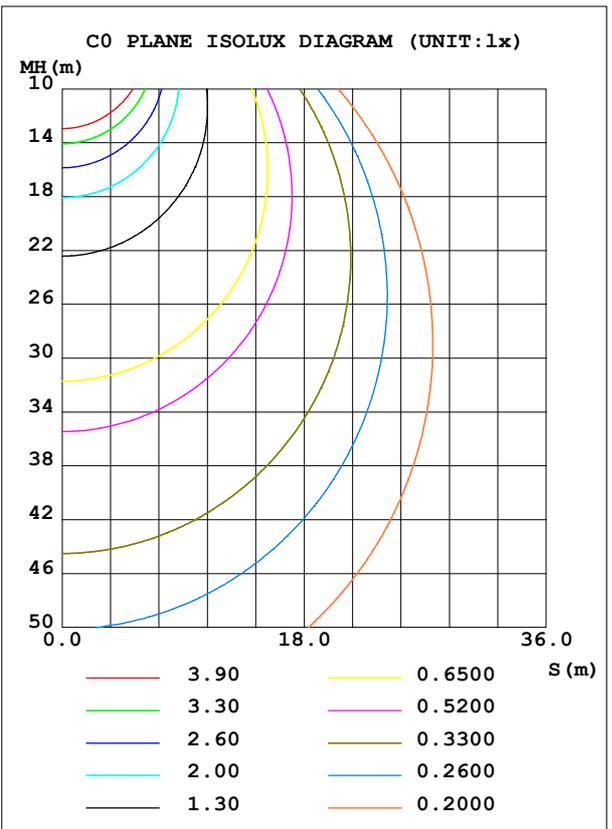


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.4lx1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 51.70 lm/W
MODEL		Imax (cd)	653.8	S/MH (C0/180)	1.26	
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE (V)	120-277	TOTAL FLUX (lm)	1878.4	η UP, DN (C0-180)	0.1, 50.0	
NOMINAL FLUX (lm)	1878.41	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 49.8	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	99.8	CIBSE SHR MAX	1.35	

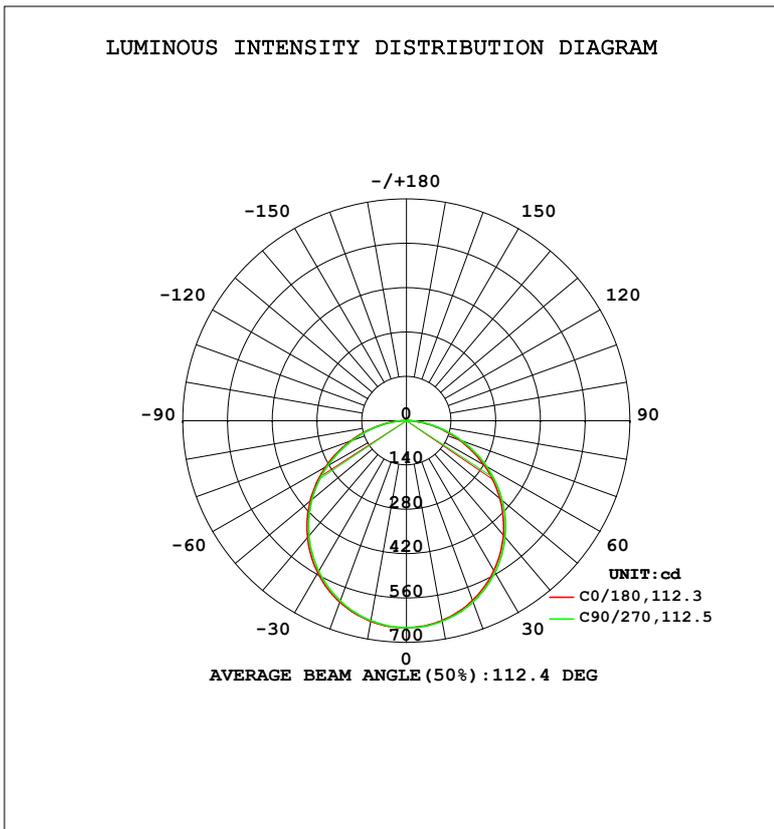

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2 °C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	640.6	641.3	643.2	643.8	643.4	641.7	640.9	640.8	0- 10	61.83	61.83	3.29,3.29
20	604.3	606.7	609.2	610.1	609.7	607.2	605.6	605.1	10- 20	177.0	238.9	12.7,12.7
30	547.2	550.7	554.3	555.1	555.2	551.9	549.2	548.1	20- 30	268.1	507.0	27,27
40	472.1	476.4	480.5	481.5	481.9	478.4	474.9	473.3	30- 40	323.1	830.1	44.2,44.2
50	382.0	386.7	391.7	392.8	393.2	389.6	385.8	383.3	40- 50	335.0	1165	62,62
60	280.9	285.9	291.0	292.3	292.9	289.3	285.0	282.4	50- 60	302.9	1468	78.1,78.1
70	174.1	178.6	183.2	185.1	185.9	182.6	178.3	175.8	60- 70	231.7	1700	90.5,90.5
80	74.12	77.12	80.63	82.46	82.84	80.06	77.23	75.25	70- 80	135.5	1835	97.7,97.7
90	0.5465	0.7147	1.899	2.699	2.570	1.241	0.6520	0.3580	80- 90	39.64	1875	99.8,99.8
100	0	0	0	0	0.0898	0.1786	0.0899	0.0900	90-100	0.0882	1875	99.8,99.8
110	0.2695	0.3588	0.2696	0.2699	0.5405	0.5389	0.6290	0.7198	100-110	0.2628	1875	99.8,99.8
120	0.2695	0.2695	0.2696	0.2699	0.8089	0.8976	0.8087	1.080	110-120	0.5203	1876	99.9,99.9
130	0.3594	0.2698	0.2696	0.2699	1.256	1.078	1.078	1.350	120-130	0.6020	1876	99.9,99.9
140	0.7171	0.7168	0.2708	0.2699	1.349	1.078	1.258	1.350	130-140	0.6106	1877	99.9,99.9
150	1.078	0.6287	0.6290	0.2699	1.438	1.168	1.348	1.350	140-150	0.6116	1877	99.9,99.9
160	1.168	0.6287	0.7189	0.2699	1.527	1.437	1.348	1.440	150-160	0.5072	1878	100,100
170	1.348	0.6287	1.168	0.4489	1.438	1.347	1.348	1.440	160-170	0.3206	1878	100,100
180	1.438	1.347	1.348	0.6299	1.527	0.8084	1.348	0.9898	170-180	0.1139	1878	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 998.88 lm

%lum = 53.2%

%lamp = 53.2%

Conical surface Flux(120deg): 1468 lm

%lum = 78.1%


%lamp = 78.1%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.41x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

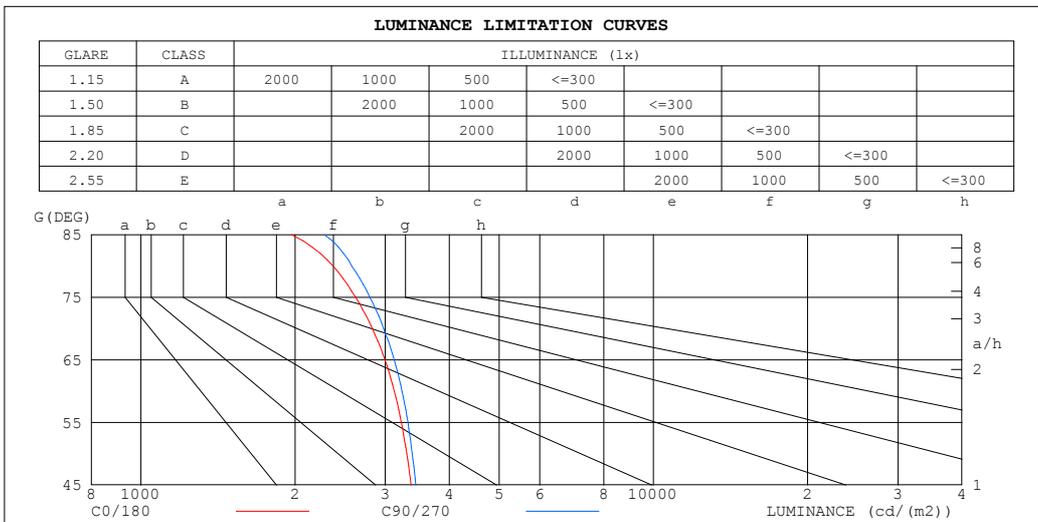

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1971	2282
80	2372	2580
75	2624	2799
70	2829	2976
65	2994	3120
60	3121	3234
55	3222	3320
50	3303	3386
45	3368	3440


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.4lx1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization (CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.62	.56	.52	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

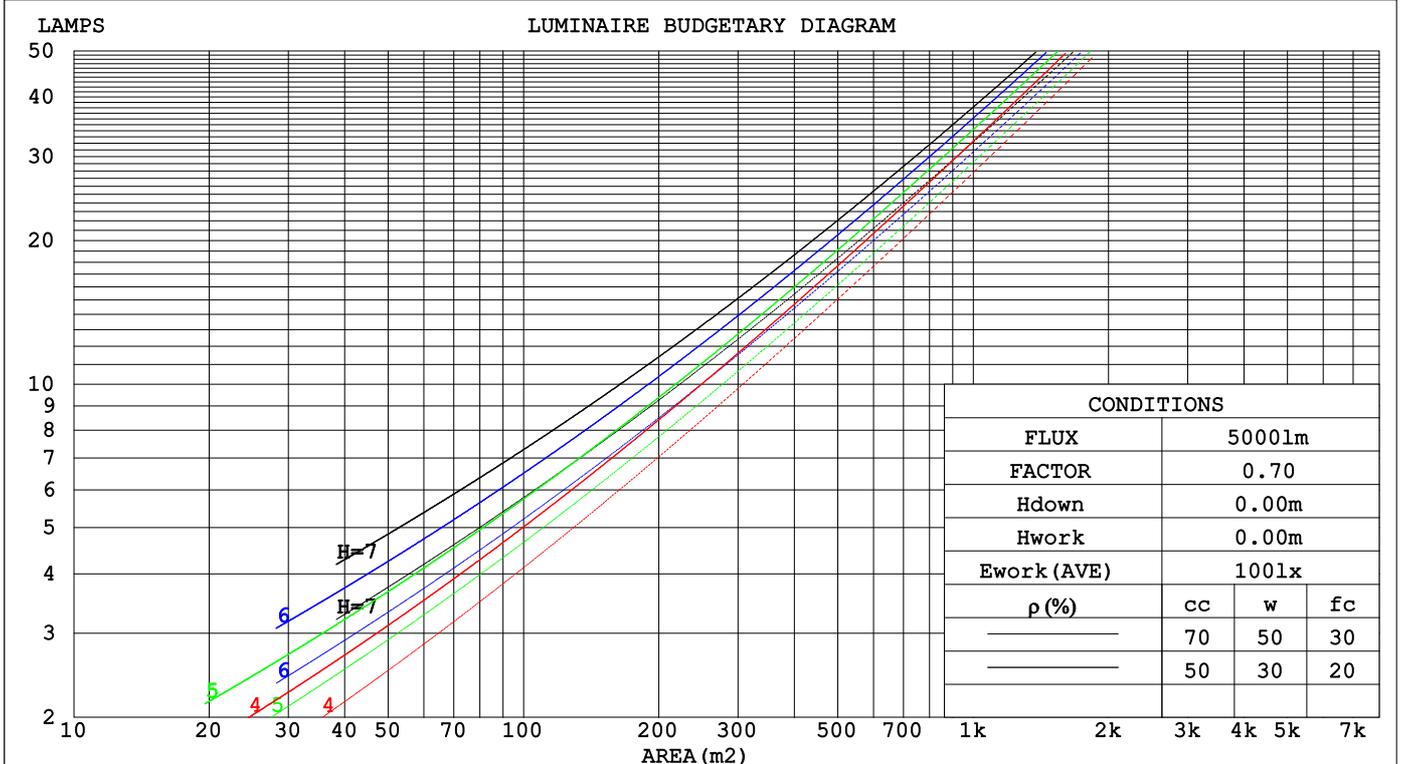

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

WEC AND CCEC

Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.41x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.306	.175	.055	.293	.168	.054	.280	.162	.052	.269	.156	.050	
2.0	.294	.161	.049	.288	.158	.049	.276	.153	.048	.265	.149	.047	.255	.144	.045	
3.0	.271	.144	.043	.266	.142	.043	.255	.138	.042	.246	.135	.041	.237	.131	.041	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.118	.034	.227	.116	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.199	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.172	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.135	.117	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.143	.100	.066	.098	.069	.046	.057	.041	.027	.018	.013	.009	
4.0	.159	.103	.060	.136	.089	.052	.094	.062	.036	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.035	.085	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.082	.047	.021	.047	.028	.013	.015	.009	.004	
8.0	.131	.071	.030	.112	.062	.026	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.066	.027	.107	.057	.023	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.4lx1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.9	18.4	17.2	18.6	18.8	17.0	18.6	17.3	18.8	19.0
3H	18.4	19.8	18.7	20.0	20.3	18.6	20.0	18.9	20.2	20.5
4H	19.0	20.3	19.3	20.6	20.8	19.2	20.5	19.5	20.8	21.1
6H	19.4	20.7	19.8	21.0	21.2	19.7	20.9	20.0	21.2	21.5
8H	19.6	20.8	19.9	21.1	21.4	19.8	21.1	20.2	21.3	21.6
12H	19.6	20.8	20.0	21.1	21.4	19.9	21.1	20.3	21.4	21.7
4H 2H	17.5	18.9	17.8	19.1	19.4	17.6	19.0	17.9	19.2	19.5
3H	19.2	20.4	19.6	20.7	21.0	19.4	20.5	19.7	20.8	21.1
4H	19.9	21.0	20.3	21.3	21.7	20.1	21.2	20.5	21.5	21.8
6H	20.5	21.4	20.9	21.8	22.2	20.7	21.7	21.1	22.0	22.4
8H	20.7	21.6	21.1	21.9	22.3	20.9	21.8	21.3	22.2	22.6
12H	20.8	21.6	21.2	22.0	22.4	21.1	21.9	21.5	22.3	22.7
8H 4H	20.2	21.1	20.6	21.5	21.9	20.4	21.3	20.8	21.6	22.0
6H	20.9	21.7	21.4	22.1	22.5	21.1	21.9	21.6	22.3	22.7
8H	21.2	21.8	21.7	22.3	22.7	21.4	22.1	21.9	22.5	23.0
12H	21.4	22.0	21.9	22.4	22.9	21.7	22.2	22.1	22.7	23.2
12H 4H	20.2	21.0	20.7	21.4	21.8	20.4	21.2	20.8	21.6	22.0
6H	21.0	21.6	21.4	22.1	22.5	21.2	21.8	21.6	22.3	22.7
8H	21.3	21.9	21.8	22.3	22.8	21.5	22.1	22.0	22.5	23.0

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.2	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3

CIE Pub.117, 1878 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.2)
Area: 0.18 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.41x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	91	86	78
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	99	106	102	98	101	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.4lx1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

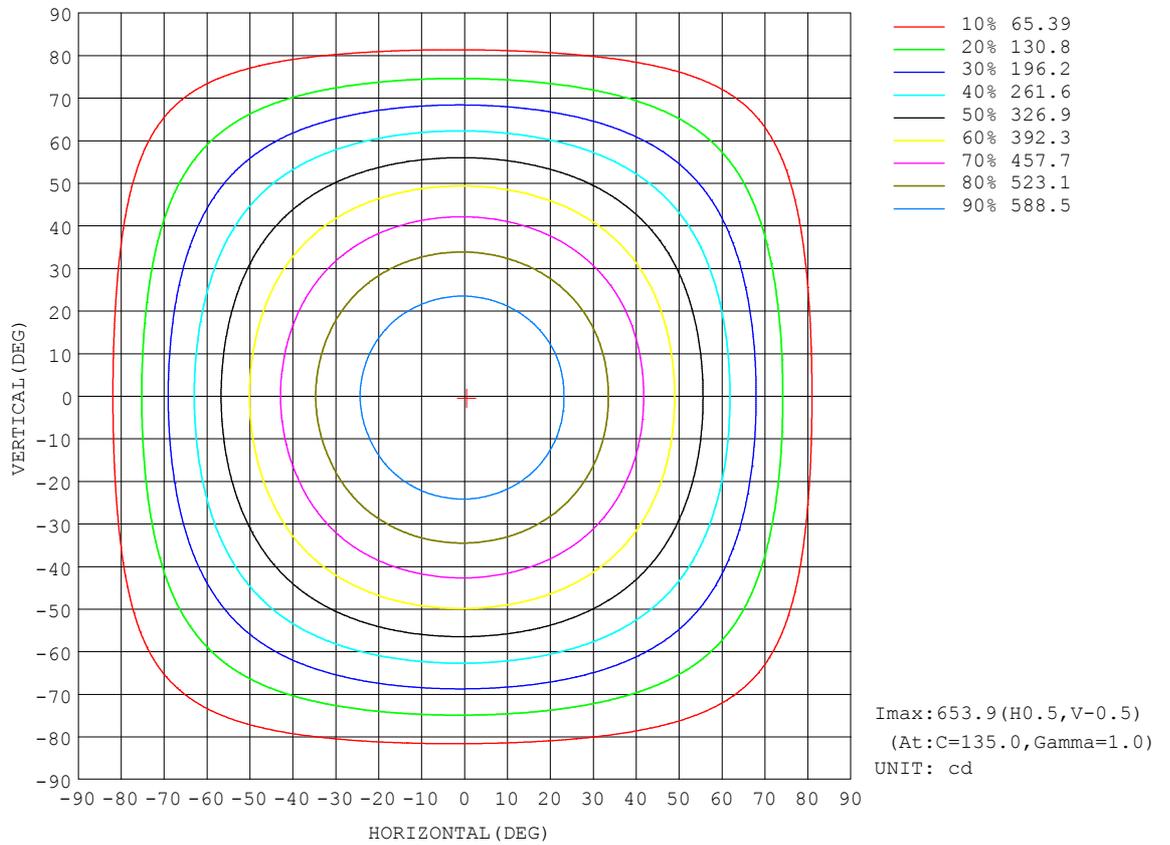


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

AAI Figure

Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.41x1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Flux out:1383 lm

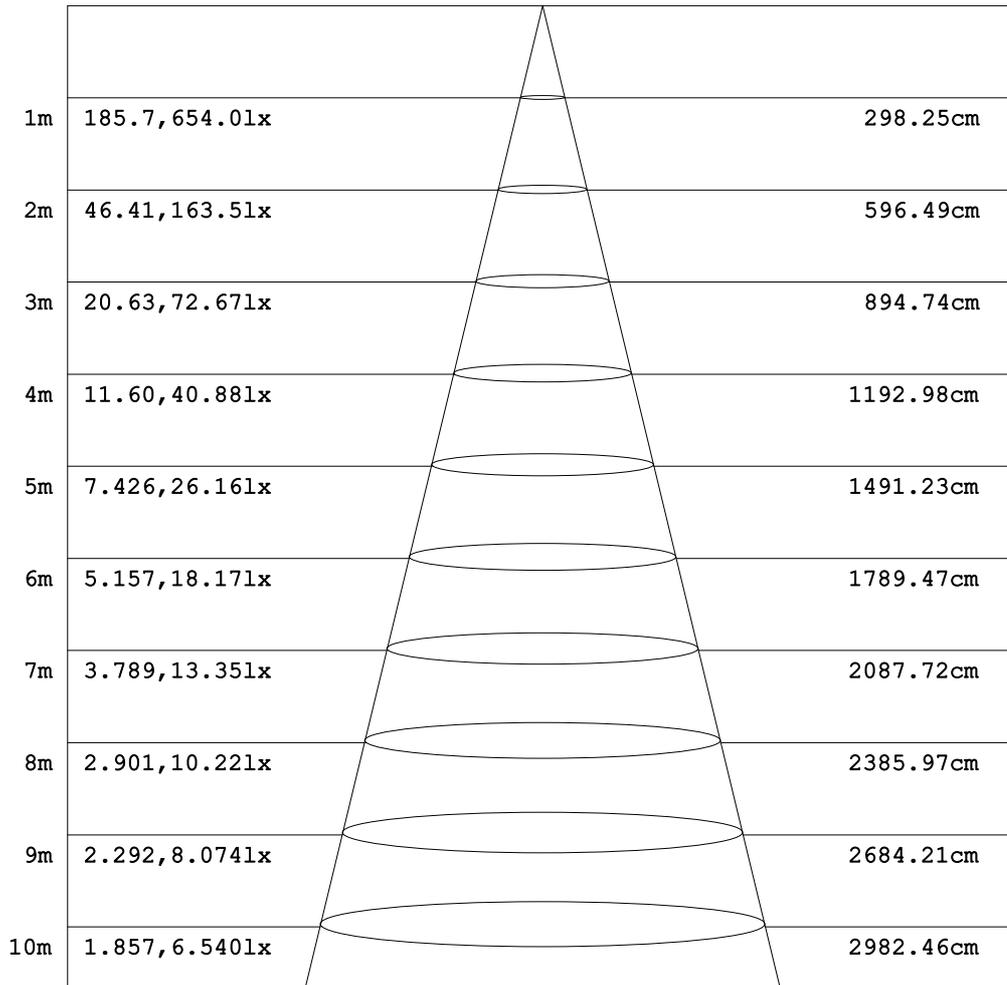

Angle:112.31deg

Height

Eavg, Emax

Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2°C
Operators:Ethan
Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.4lx1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

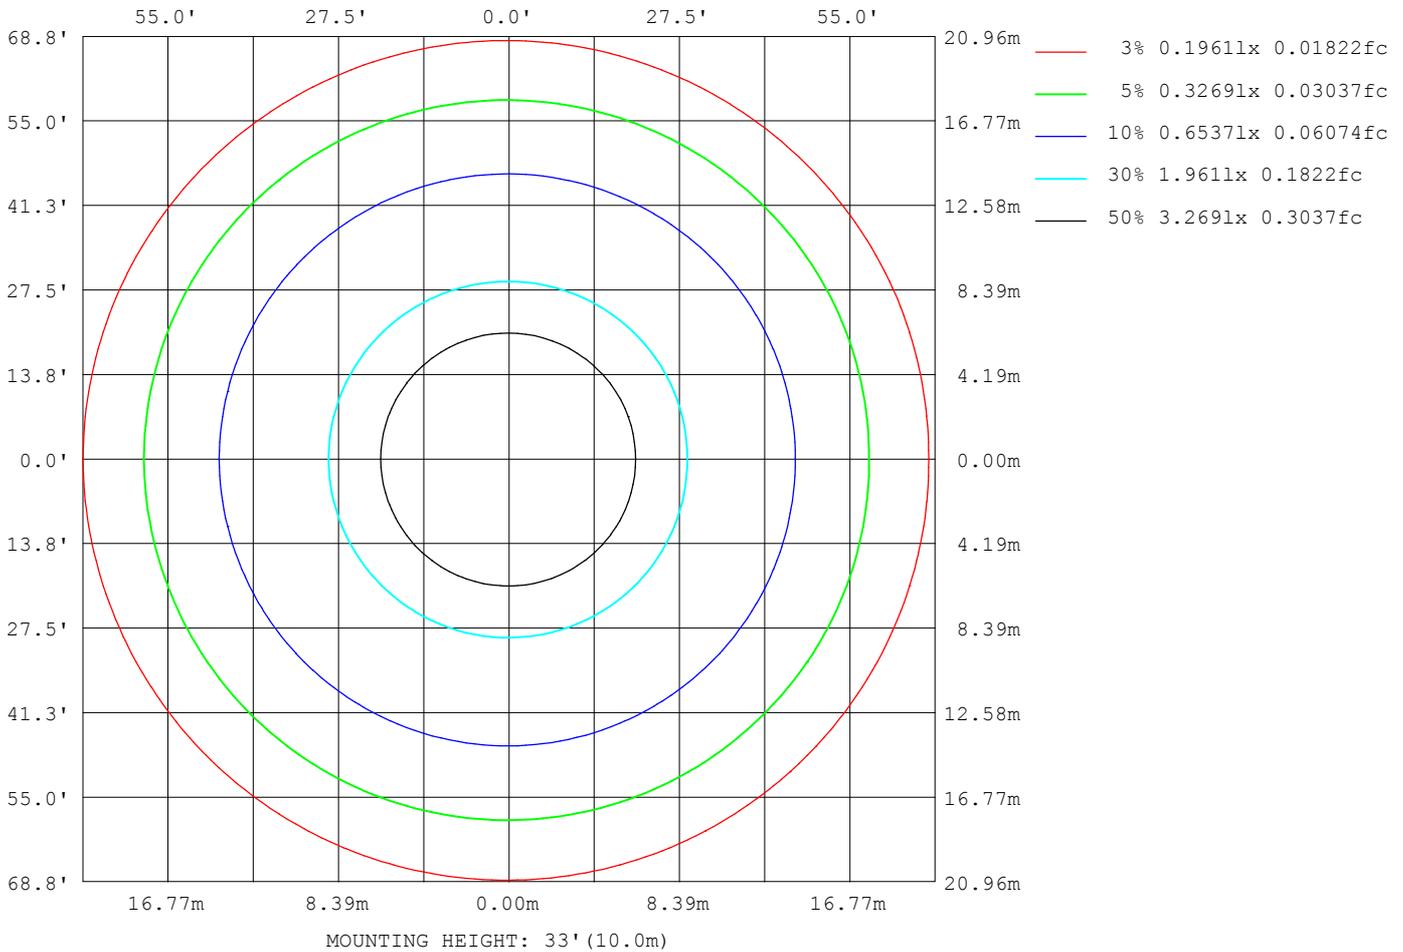

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

Planar Illuminance Curve

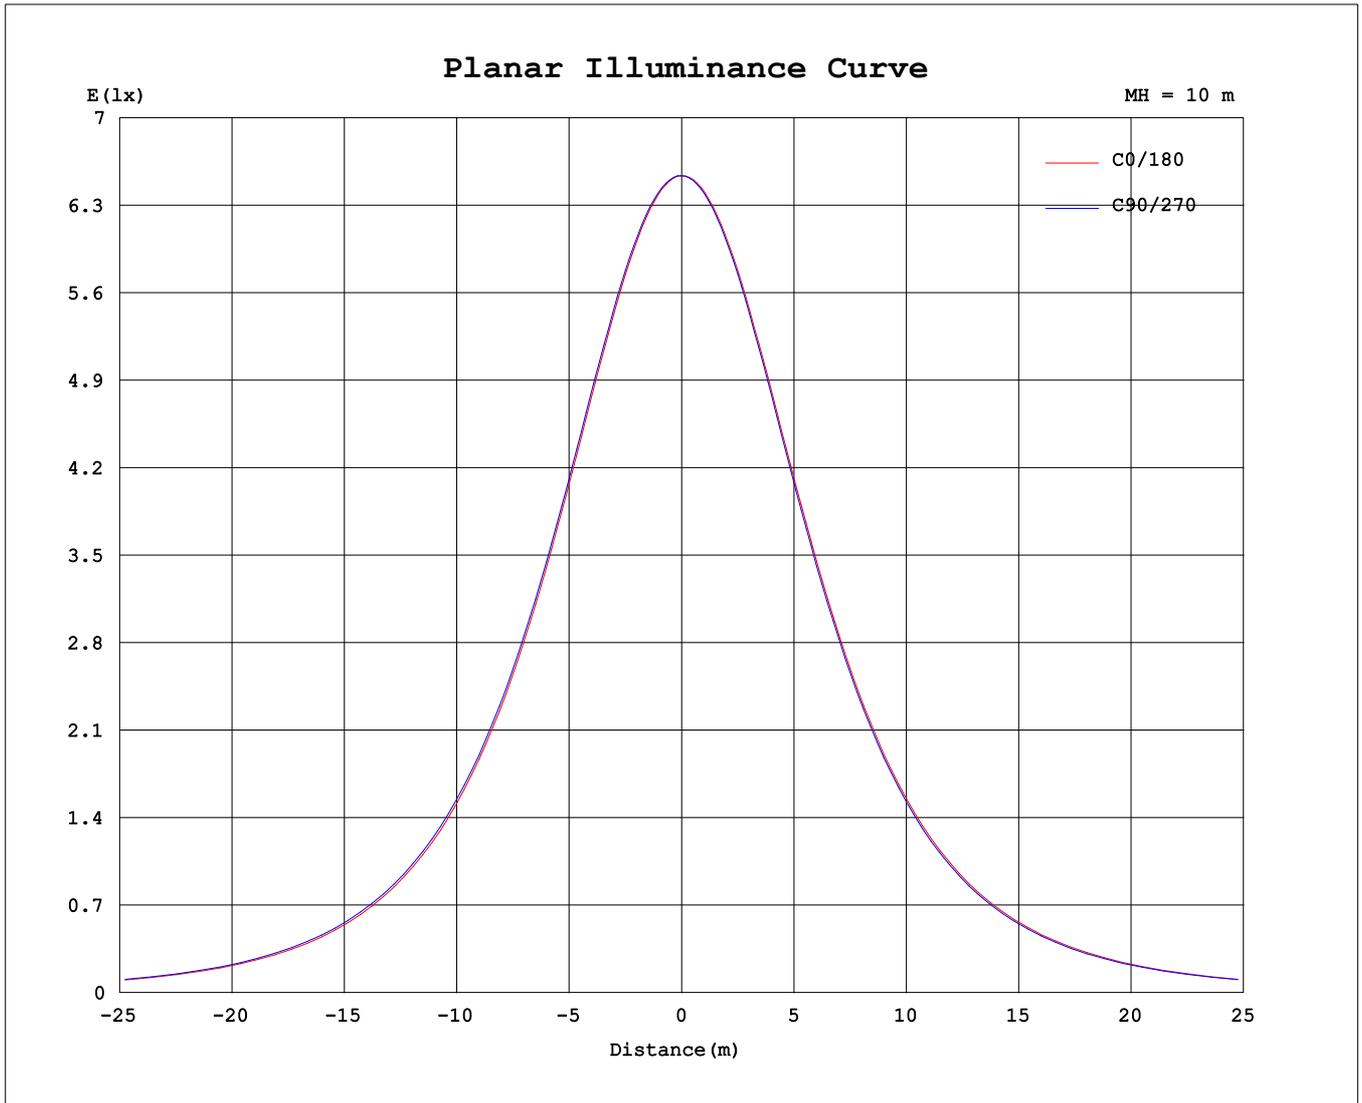

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Ethan
Test Date: 2022-05-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 26.000m [K=1.3807]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.3058A P:36.33W PF:0.9892 Freq:60.01Hz Lamp Flux:1878.4lx1 lm		
NAME: CL28P-24-35S-952C5-MVTD-BK 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ590mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	654	654	654	654	654	654	654	654	654	654	654	654	654	654	654	654			
5	650	650	651	651	651	651	652	652	651	651	650	650	650	650	650	650			
10	641	641	641	643	643	643	644	643	643	642	642	641	641	641	641	641			
15	625	626	627	628	629	629	630	629	630	628	627	627	626	625	626	626			
20	604	606	607	608	609	610	610	609	610	609	607	606	606	605	605	605			
25	578	580	581	583	584	585	585	584	585	584	582	581	580	579	579	579			
30	547	549	551	553	554	555	555	554	555	554	552	551	549	548	548	548			
35	512	514	516	518	520	521	521	519	521	519	517	516	514	513	513	513			
40	472	474	476	479	481	481	482	480	482	480	478	477	475	474	473	474			
45	429	431	433	436	438	439	439	438	439	438	436	434	432	430	430	430			
50	382	384	387	390	392	393	393	392	393	392	390	388	386	384	383	383			
55	333	335	338	341	343	344	344	343	344	343	340	339	337	335	334	334			
60	281	283	286	289	291	292	292	291	293	291	289	287	285	283	282	282			
65	228	230	233	236	237	239	239	238	240	238	236	234	232	230	229	230			
70	174	176	179	181	183	185	185	184	186	185	183	180	178	177	176	176			
75	122	124	126	129	130	131	132	131	133	132	130	128	126	124	124	124			
80	74.1	75.4	77.1	79.2	80.6	82.0	82.5	81.9	82.8	81.6	80.1	78.4	77.2	75.9	75.3	75.3			
85	30.9	32.0	33.3	35.0	35.8	36.9	37.5	36.9	38.7	37.8	36.5	35.1	34.1	33.1	32.5	32.8			
90	0.55	0.53	0.71	1.34	1.90	2.50	2.70	2.44	2.57	1.86	1.24	0.81	0.65	0.48	0.36	0.21			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.18	0.18	0.09	0.09	0.00	0.09	0.18			
105	0.27	0.27	0.18	0.18	0.18	0.09	0.36	0.18	0.27	0.27	0.27	0.36	0.27	0.27	0.45	0.63			
110	0.27	0.27	0.36	0.27	0.27	0.27	0.27	0.18	0.54	0.45	0.54	0.54	0.63	0.63	0.72	0.63			
115	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.63	0.72	0.72	0.90	0.81	0.90	0.81	0.99			
120	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.81	0.90	0.90	0.90	0.81	0.90	1.08	1.26			
125	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.27	1.08	1.08	0.99	0.90	1.08	0.90	1.35	1.44			
130	0.36	0.27	0.27	0.27	0.27	0.27	0.27	0.27	1.26	1.26	1.08	0.90	1.08	0.90	1.35	1.53			
135	0.45	0.45	0.54	0.27	0.27	0.27	0.27	0.27	1.35	1.26	1.08	1.17	1.26	0.90	1.35	1.53			
140	0.72	0.54	0.72	0.36	0.27	0.27	0.27	0.45	1.35	1.35	1.08	1.35	1.26	1.35	1.35	1.53			
145	0.90	0.90	0.63	0.63	0.45	0.63	0.27	0.45	1.44	1.35	1.08	1.44	1.26	1.35	1.35	1.53			
150	1.08	0.81	0.63	1.26	0.63	0.81	0.27	0.45	1.44	1.35	1.17	1.44	1.35	1.35	1.35	1.53			
155	1.17	0.81	0.63	1.17	0.72	0.99	0.27	0.45	1.44	1.35	1.44	1.44	1.35	1.35	1.44	1.53			
160	1.17	0.81	0.63	1.17	0.72	0.99	0.27	0.45	1.53	1.44	1.44	1.44	1.35	1.35	1.44	1.62			
165	1.17	0.81	0.63	1.17	0.72	0.99	0.36	0.54	1.62	1.44	1.26	1.44	1.35	1.35	1.44	1.71			
170	1.35	0.81	0.63	1.26	1.17	0.99	0.45	1.44	1.44	1.44	1.35	1.35	1.35	1.35	1.44	1.26			
175	1.44	0.81	1.35	1.26	1.35	0.99	0.63	1.44	1.44	1.44	0.81	1.35	1.35	1.35	0.99	0.81			
180	1.44	0.81	1.35	1.35	1.35	0.99	0.63	1.44	1.53	1.44	0.81	1.35	1.35	1.35	0.99	0.63			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks: