
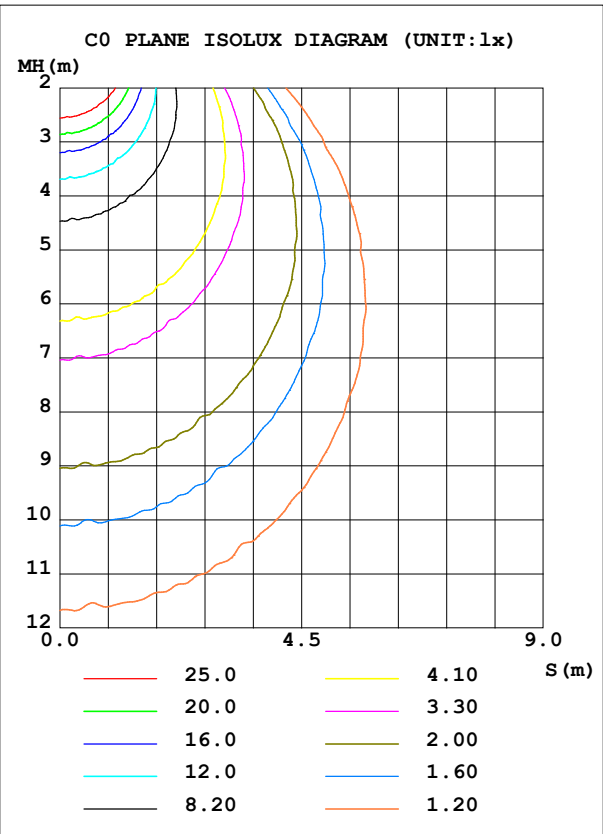


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	BRMF05LAJD1WH_2700K	Imax (cd)	163.9	S/MH (C0/180)	1.27
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	478.32	η UP, DN (C0-180)	0.1,49.1
NOMINAL FLUX (lm)	478.319	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1,50.8
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	99.8	CIBSE SHR MAX	1.35

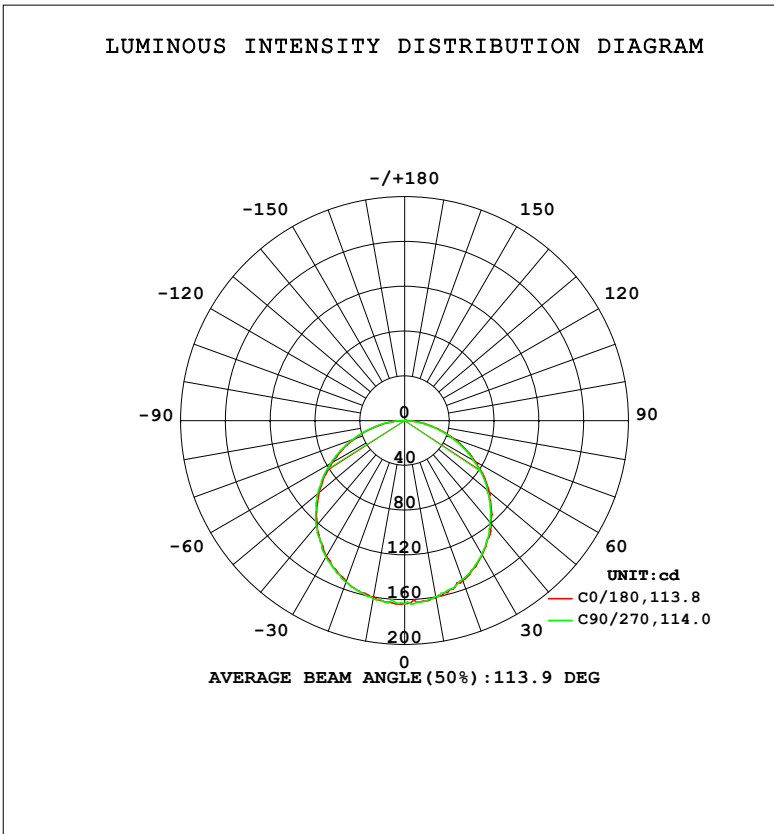

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	161.0	159.4	159.7	161.4					0- 10	15.46	15.46	3.23,3.23
20	152.0	151.0	153.1	153.6					10- 20	44.34	59.80	12.5,12.5
30	138.6	137.9	140.0	140.9					20- 30	67.47	127.3	26.6,26.6
40	120.9	117.4	121.8	123.0					30- 40	81.69	209.0	43.7,43.7
50	98.75	96.22	99.63	101.7					40- 50	85.10	294.1	61.5,61.5
60	72.67	70.90	74.72	76.50					50- 60	77.60	371.7	77.7,77.7
70	46.11	44.61	47.71	49.47					60- 70	59.90	431.6	90.2,90.2
80	20.32	18.78	21.83	23.02					70- 80	35.66	467.2	97.7,97.7
90	0.0212	0.0497	0.3878	0.6206					80- 90	10.31	477.5	99.8,99.8
100	0	0.0166	0.0001	0					90-100	0.0198	477.6	99.8,99.8
110	0	0.0608	0.0663	0.0055					100-110	0.0174	477.6	99.8,99.8
120	0.0607	0.1217	0.1381	0.0773					110-120	0.0652	477.6	99.9,99.9
130	0.1158	0.1935	0.2043	0.1437					120-130	0.1182	477.8	99.9,99.9
140	0.1601	0.2366	0.2663	0.2045					130-140	0.1474	477.9	99.9,99.9
150	0.2120	0.2764	0.3192	0.2598					140-150	0.1521	478.1	99.9,99.9
160	0.2596	0.3262	0.3645	0.3095					150-160	0.1346	478.2	100,100
170	0.3201	0.3665	0.4198	0.3479					160-170	0.0954	478.3	100,100
180	0.3645	0.3704	0.4087	0.3593					170-180	0.0355	478.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:

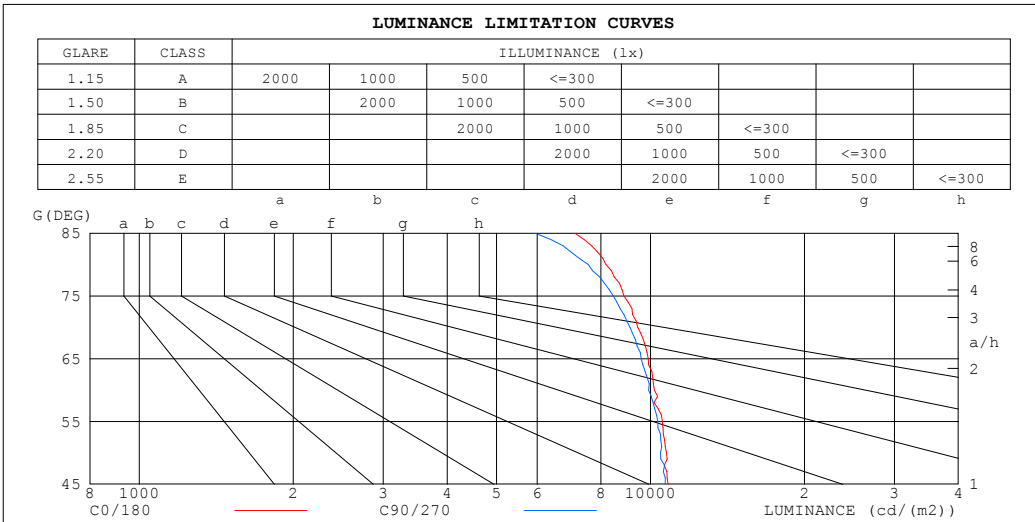

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7119	5947
80	8186	7559
75	8869	8462
70	9432	9116
65	9894	9588
60	10168	9912
55	10551	10330
50	10748	10463
45	10827	10688


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

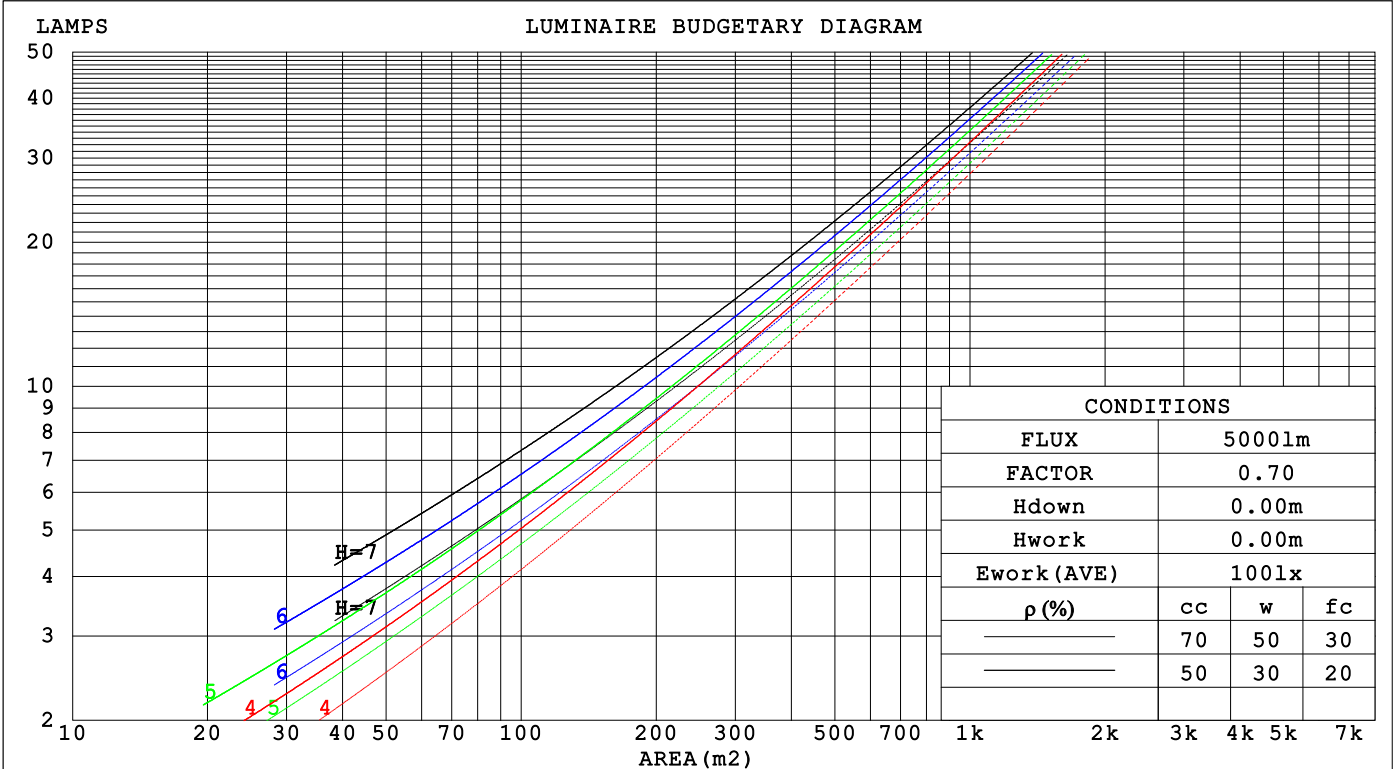

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz		
Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.316	.180	.057	.309	.176	.056	.295	.169	.054	.283	.163	.052	.272	.157	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.154	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.247	.136	.042	.238	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.157	.135	.156	.135	.116	.107	.093	.080	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.099	.149	.115	.085	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.075	.143	.100	.065	.098	.069	.046	.057	.040	.027	.018	.013	.009	
4.0	.159	.102	.059	.136	.088	.051	.094	.062	.036	.054	.036	.021	.017	.012	.007	
5.0	.151	.092	.048	.130	.080	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.124	.072	.035	.085	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.034	.118	.066	.030	.082	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.131	.071	.030	.112	.062	.026	.078	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.125	.066	.026	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.0	22.5	21.3	22.7	22.9	20.9	22.4	21.2	22.6	22.8
3H	22.5	24.0	22.8	24.2	24.4	22.4	23.8	22.7	24.1	24.3
4H	23.2	24.5	23.5	24.8	25.0	23.0	24.4	23.3	24.6	24.9
6H	23.7	24.9	24.0	25.2	25.5	23.5	24.7	23.8	25.0	25.3
8H	23.8	25.0	24.2	25.3	25.6	23.6	24.8	23.9	25.1	25.4
12H	23.9	25.1	24.3	25.4	25.7	23.6	24.8	24.0	25.1	25.4
4H 2H	21.6	22.9	21.9	23.2	23.5	21.5	22.9	21.8	23.1	23.4
3H	23.3	24.5	23.7	24.8	25.1	23.2	24.4	23.6	24.7	25.0
4H	24.1	25.2	24.5	25.5	25.8	24.0	25.0	24.3	25.4	25.7
6H	24.7	25.7	25.1	26.0	26.4	24.5	25.5	24.9	25.8	26.2
8H	24.9	25.8	25.3	26.2	26.6	24.7	25.6	25.1	26.0	26.4
12H	25.1	25.9	25.5	26.3	26.7	24.8	25.6	25.2	26.0	26.4
8H 4H	24.4	25.3	24.8	25.6	26.0	24.2	25.1	24.7	25.5	25.9
6H	25.1	25.9	25.6	26.3	26.7	24.9	25.7	25.4	26.1	26.5
8H	25.4	26.1	25.9	26.5	27.0	25.2	25.9	25.7	26.3	26.8
12H	25.6	26.2	26.1	26.7	27.1	25.4	26.0	25.9	26.4	26.9
12H 4H	24.4	25.2	24.8	25.6	26.0	24.3	25.1	24.7	25.5	25.9
6H	25.2	25.8	25.6	26.3	26.7	25.0	25.7	25.5	26.1	26.6
8H	25.5	26.1	26.0	26.5	27.0	25.3	25.9	25.8	26.3	26.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 478.3 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.6)
Area: 0.0143 m2

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 90.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.800m [K=1.0000]
Test Date:2025-12-03	Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	70	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	83	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:

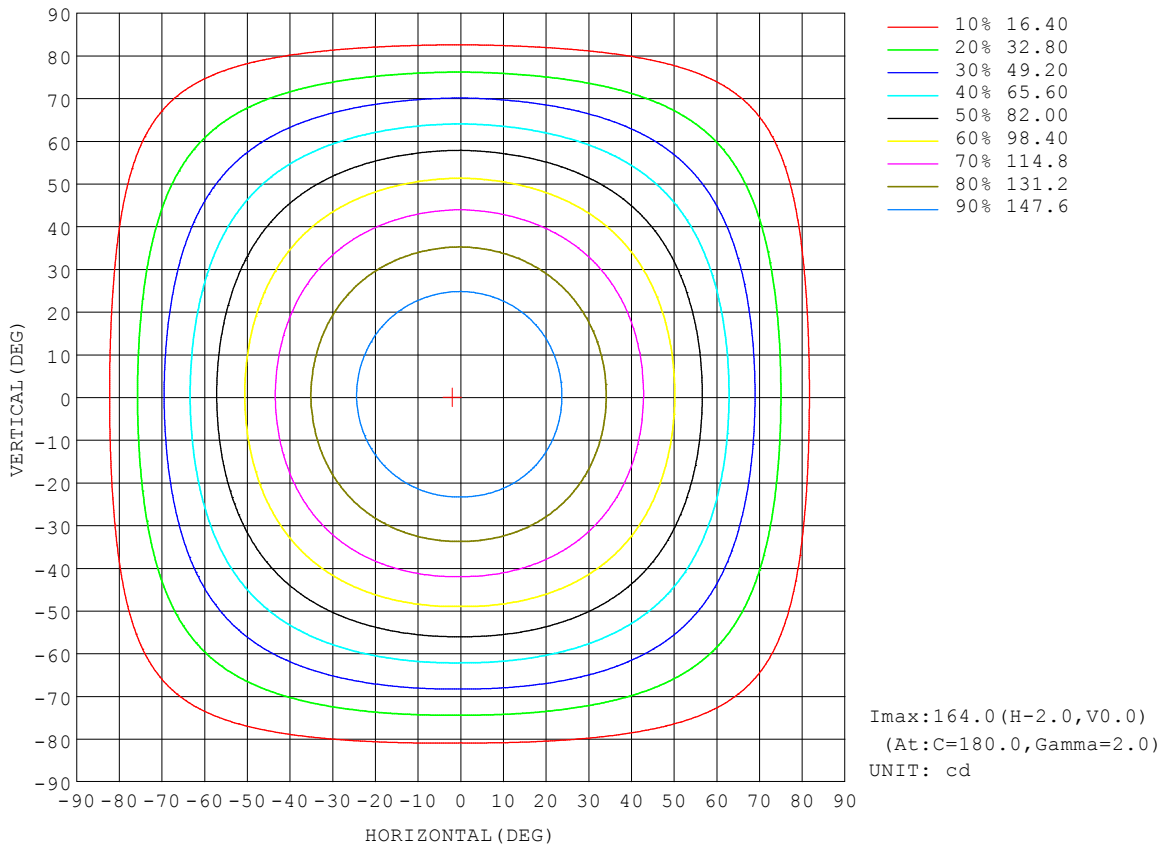


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:

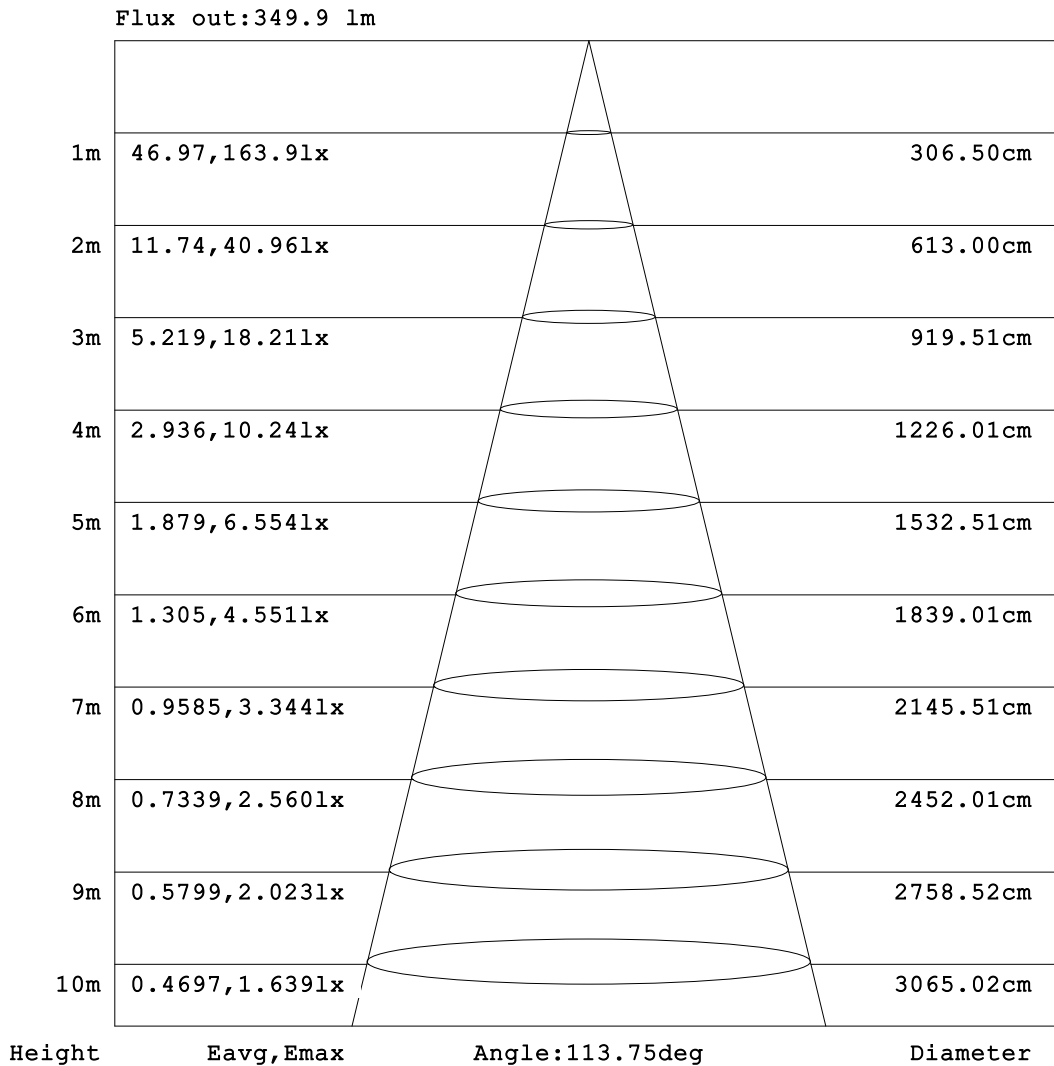


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:

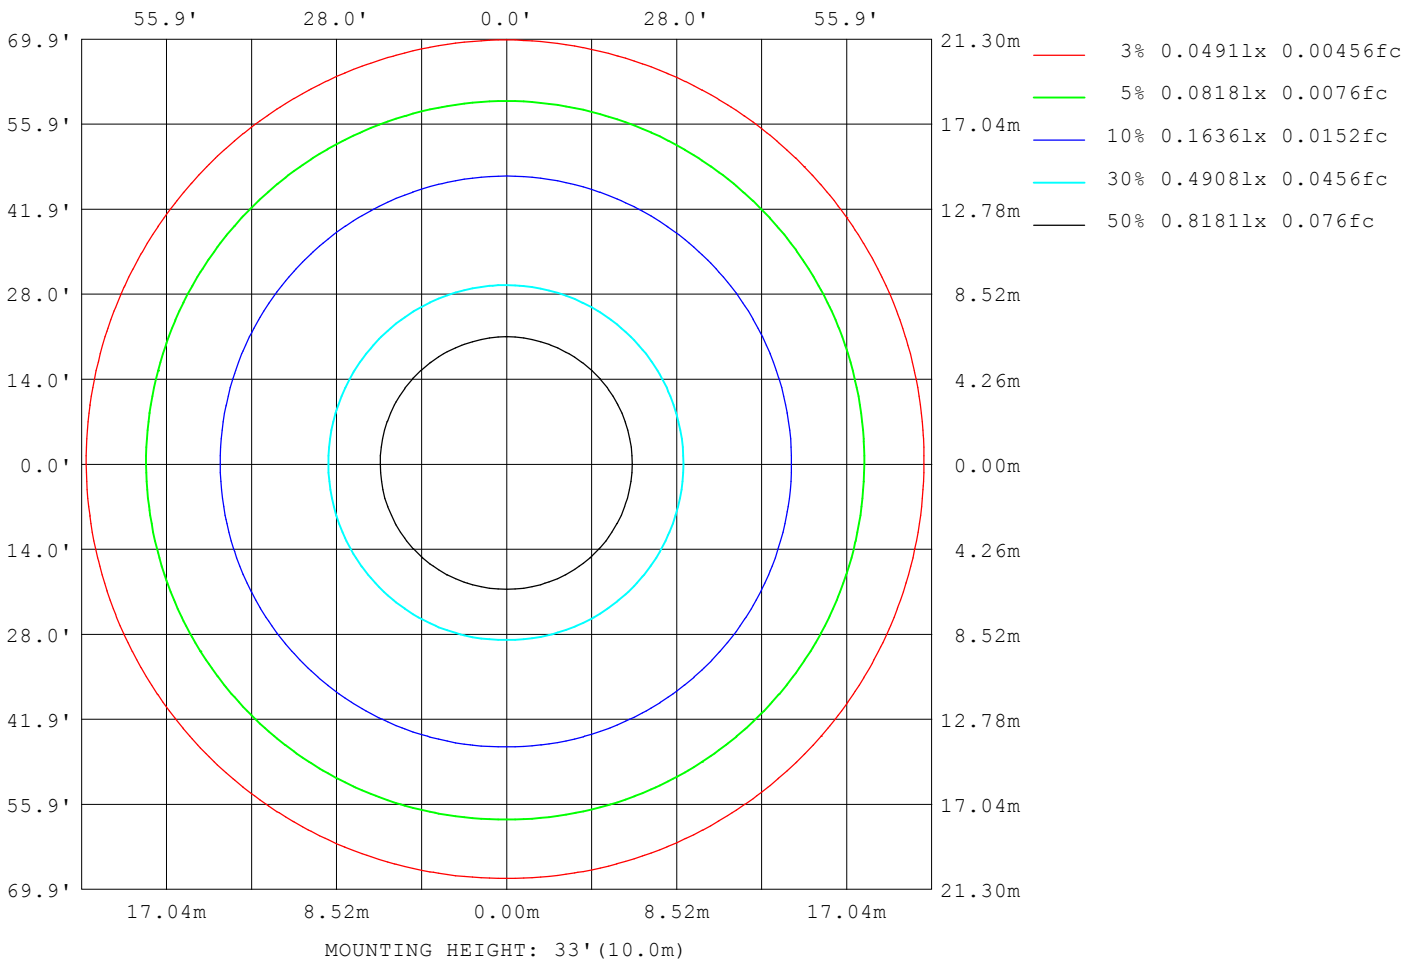

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10006
L_0~180 (75) av	9124
L_0~180 (85) av	7626
L_90~270 (65) av	10024
L_90~270 (75) av	9098
L_90~270 (85) av	6892
L_45 (65) av	10025
L_45 (75) av	9124
L_45 (85) av	7199

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

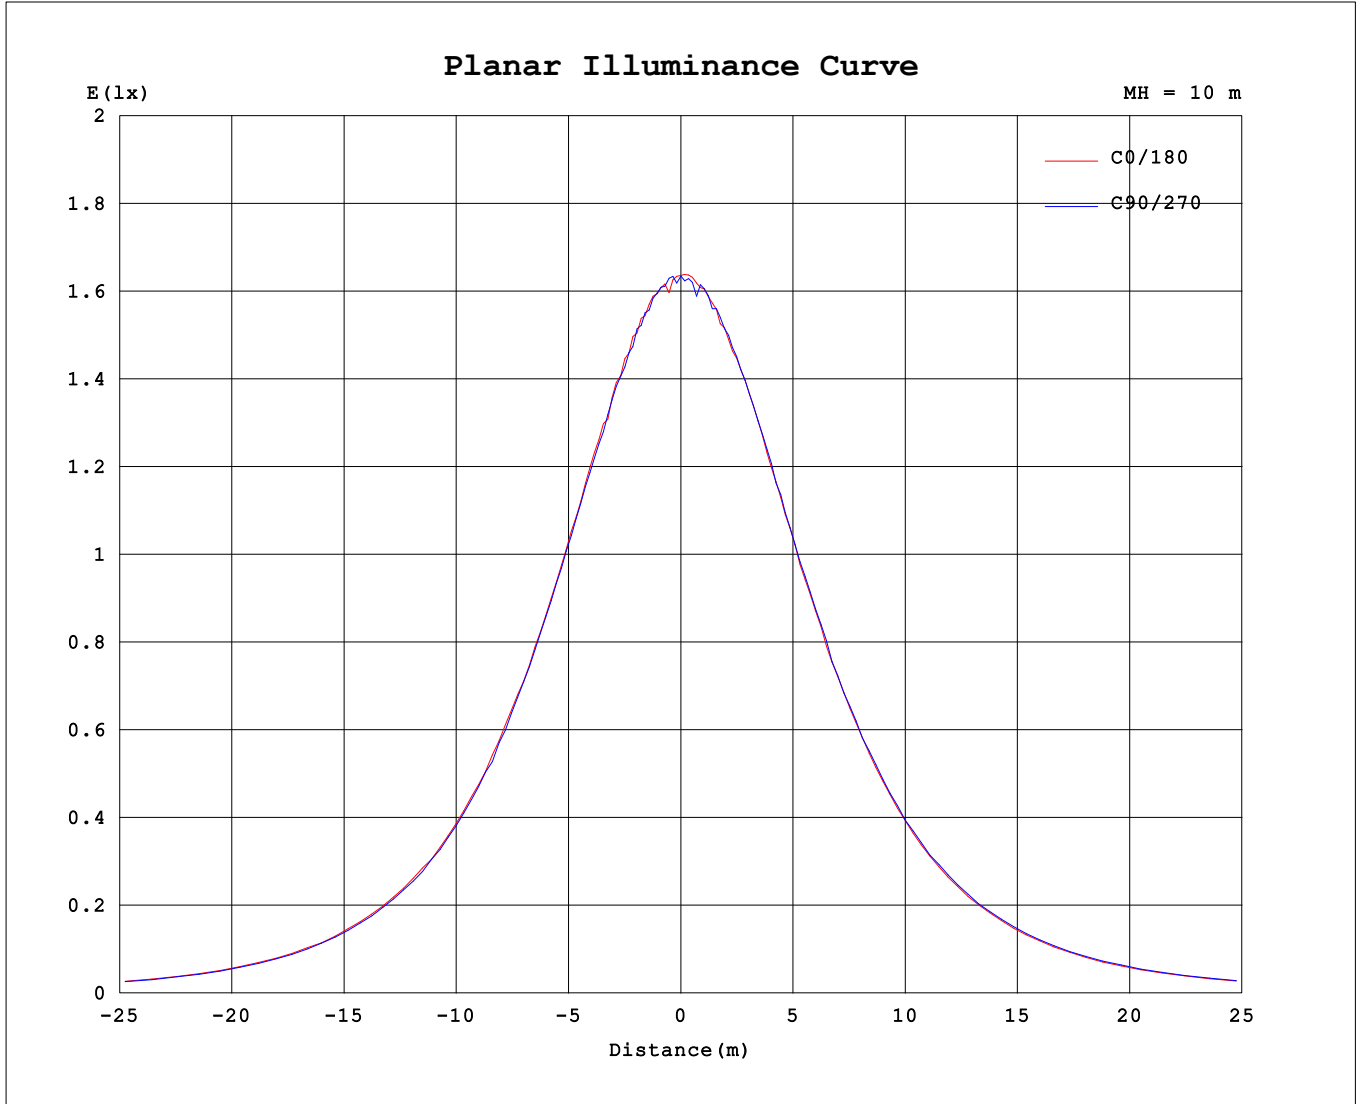

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0655A P:7.5460W PF:0.9602 Freq:59.98Hz Lamp Flux:478.319x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.135	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	164	164	164	164															
5	163	163	163	163															
10	161	159	160	161															
15	156	156	158	158															
20	152	151	153	154															
25	146	145	147	147															
30	139	138	140	141															
35	129	129	131	132															
40	121	117	122	123															
45	109	108	111	112															
50	98.7	96.2	99.6	102															
55	86.5	84.8	88.0	89.5															
60	72.7	70.9	74.7	76.5															
65	59.8	58.0	61.2	63.2															
70	46.1	44.6	47.7	49.5															
75	32.8	31.3	34.7	36.0															
80	20.3	18.8	21.8	23.0															
85	8.87	7.41	10.1	9.77															
90	0.02	0.05	0.39	0.62															
95	0.00	0.01	0.00	0.00															
100	0.00	0.02	0.00	0.00															
105	0.00	0.03	0.03	0.00															
110	0.00	0.06	0.07	0.01															
115	0.02	0.10	0.10	0.04															
120	0.06	0.12	0.14	0.08															
125	0.09	0.17	0.17	0.12															
130	0.12	0.19	0.20	0.14															
135	0.14	0.21	0.23	0.18															
140	0.16	0.24	0.27	0.20															
145	0.19	0.26	0.30	0.24															
150	0.21	0.28	0.32	0.26															
155	0.24	0.30	0.34	0.28															
160	0.26	0.33	0.36	0.31															
165	0.29	0.36	0.39	0.33															
170	0.32	0.37	0.42	0.35															
175	0.36	0.37	0.41	0.36															
180	0.36	0.37	0.41	0.36															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	163.5	163.5	163.5	163.5
3.0	160.2	163.7	163.8	162.7
6.0	162.0	162.4	163.1	163.3
9.0	160.2	161.0	161.7	162.0
12.0	159.9	157.6	159.2	160.4
15.0	156.2	156.1	157.7	157.8
18.0	152.0	153.4	155.4	155.7
21.0	151.4	150.0	151.3	152.5
24.0	146.8	146.4	148.2	149.1
27.0	143.0	142.5	144.3	144.5
30.0	138.6	137.9	140.0	140.9
33.0	133.7	132.7	133.9	136.1
36.0	128.4	127.5	129.5	129.4
39.0	122.5	121.7	124.1	124.0
42.0	115.8	114.7	117.8	119.0
45.0	109.4	108.1	111.4	111.6
48.0	101.8	102.0	104.3	105.0
51.0	96.09	94.75	97.49	99.26
54.0	88.86	86.92	90.27	91.89
57.0	80.61	79.39	82.37	84.39
60.0	72.67	70.90	74.72	76.50
63.0	65.21	63.36	66.81	68.71
66.0	57.23	55.56	58.93	60.26
69.0	49.03	47.28	50.56	52.40
72.0	40.72	39.22	42.43	44.09
75.0	32.81	31.33	34.73	36.01
78.0	25.26	23.69	26.86	28.02
81.0	18.04	16.22	19.49	20.60
84.0	11.06	9.537	12.35	11.93
87.0	4.663	3.353	5.828	4.745
90.0	0.0212	0.0497	0.3878	0.6206
93.0	0	0.0111	0	0
96.0	0	0.0111	0	0
99.0	0	0.0166	0.0055	0
102.0	0	0.0166	0.0110	0
105.0	0	0.0277	0.0333	0
108.0	0	0.0499	0.0552	0
111.0	0	0.0664	0.0664	0.0165
114.0	0.0220	0.0885	0.0940	0.0277
117.0	0.0441	0.1051	0.1216	0.0552
120.0	0.0607	0.1217	0.1381	0.0773
123.0	0.0773	0.1438	0.1602	0.0995
126.0	0.0938	0.1604	0.1768	0.1216
129.0	0.1050	0.1770	0.1934	0.1436
132.0	0.1269	0.1936	0.2209	0.1548
135.0	0.1381	0.2101	0.2265	0.1824
138.0	0.1601	0.2300	0.2509	0.1989
141.0	0.1711	0.2399	0.2740	0.2100
144.0	0.1822	0.2521	0.2873	0.2266
147.0	0.1987	0.2621	0.3093	0.2433
150.0	0.2120	0.2764	0.3192	0.2598
153.0	0.2299	0.2930	0.3314	0.2763
156.0	0.2438	0.3041	0.3480	0.2874
159.0	0.2594	0.3261	0.3645	0.3041
162.0	0.2651	0.3427	0.3734	0.3206
165.0	0.2871	0.3593	0.3866	0.3306
168.0	0.2982	0.3655	0.3977	0.3422
171.0	0.3312	0.3671	0.4182	0.3507
174.0	0.3642	0.3687	0.4135	0.3592
177.0	0.3645	0.3704	0.4087	0.3593
180.0	0.3645	0.3704	0.4087	0.3593

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks: