
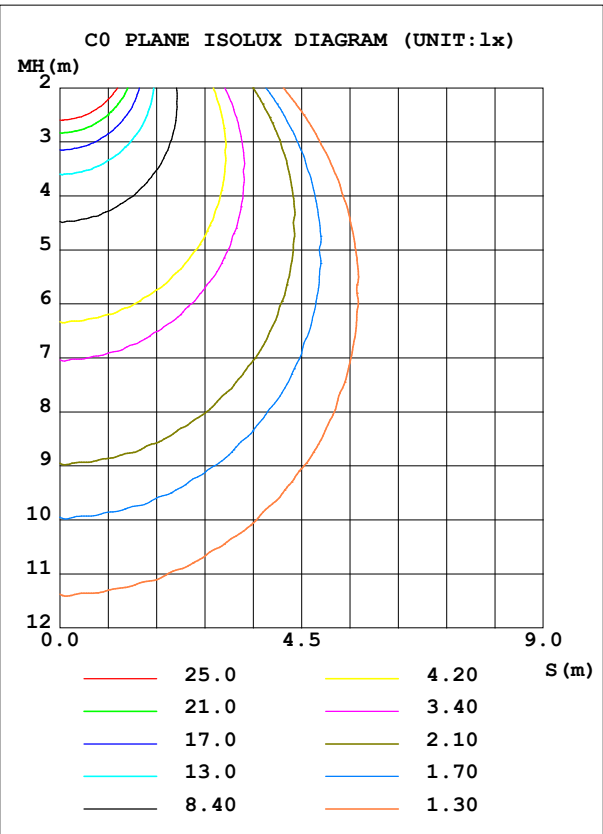


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	BRMF05LAJD1WH_3000K	Imax (cd)	169.4	S/MH (C0/180)	1.27
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	493.84	η UP, DN (C0-180)	0.1,49.1
NOMINAL FLUX (lm)	493.839	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1,50.7
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	99.8	CIBSE SHR MAX	1.35

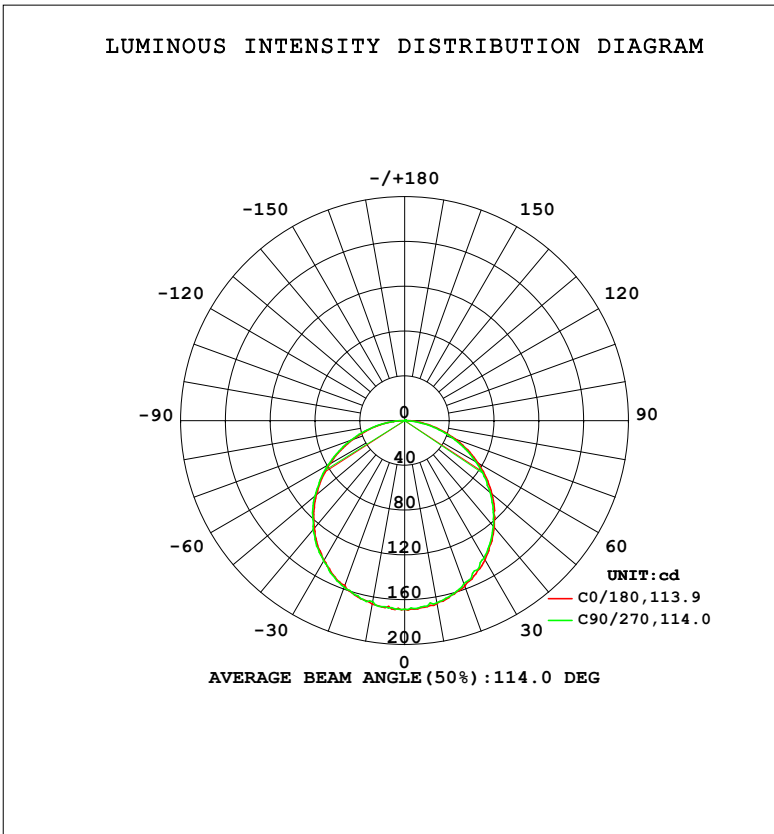

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	166.0	165.3	166.4	164.2					0- 10	15.95	15.95	3.23,3.23
20	157.4	155.0	156.3	158.3					10- 20	45.76	61.71	12.5,12.5
30	143.7	142.0	144.0	145.0					20- 30	69.55	131.3	26.6,26.6
40	124.6	123.2	125.8	127.3					30- 40	84.37	215.6	43.7,43.7
50	101.7	99.82	103.2	104.8					40- 50	88.02	303.7	61.5,61.5
60	75.86	73.56	77.20	78.75					50- 60	80.05	383.7	77.7,77.7
70	48.11	45.84	49.39	51.11					60- 70	61.85	445.6	90.2,90.2
80	21.27	19.18	22.31	23.87					70- 80	36.80	482.4	97.7,97.7
90	0.0280	0.0551	0.3010	0.6640					80- 90	10.65	493.0	99.8,99.8
100	0	0.0166	0.0056	0					90-100	0.0202	493.0	99.8,99.8
110	0	0.0663	0.0720	0.0165					100-110	0.0193	493.0	99.8,99.8
120	0.0663	0.1379	0.1440	0.0827					110-120	0.0706	493.1	99.9,99.9
130	0.1217	0.1987	0.2213	0.1599					120-130	0.1251	493.2	99.9,99.9
140	0.1770	0.2428	0.2767	0.2206					130-140	0.1561	493.4	99.9,99.9
150	0.2213	0.2936	0.3321	0.2759					140-150	0.1602	493.6	99.9,99.9
160	0.2821	0.3476	0.3818	0.3255					150-160	0.1413	493.7	100,100
170	0.3374	0.3832	0.4372	0.3696					160-170	0.1003	493.8	100,100
180	0.3873	0.3862	0.4260	0.3862					170-180	0.0375	493.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:

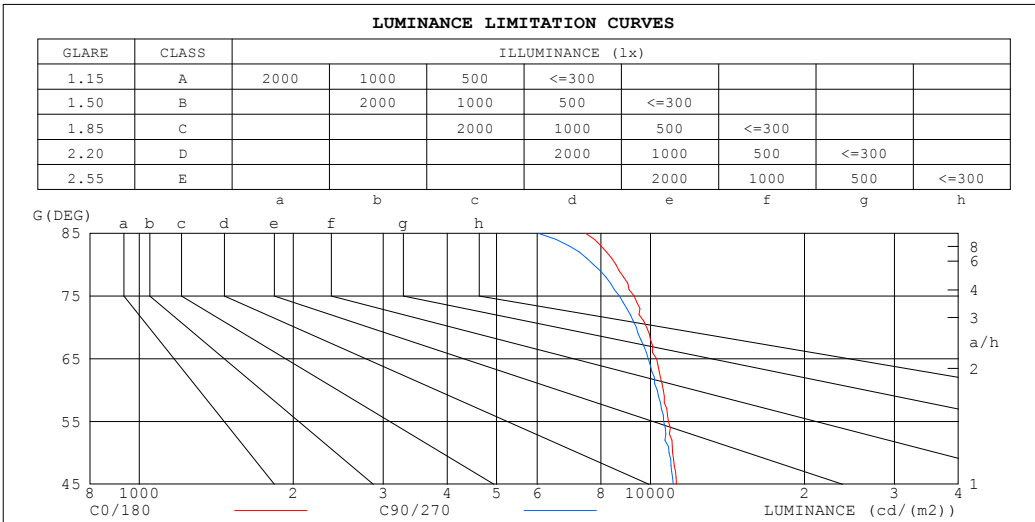

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7461	6026
80	8555	7735
75	9292	8695
70	9823	9385
65	10276	9896
60	10596	10303
55	10841	10603
50	11048	10874
45	11243	11077


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

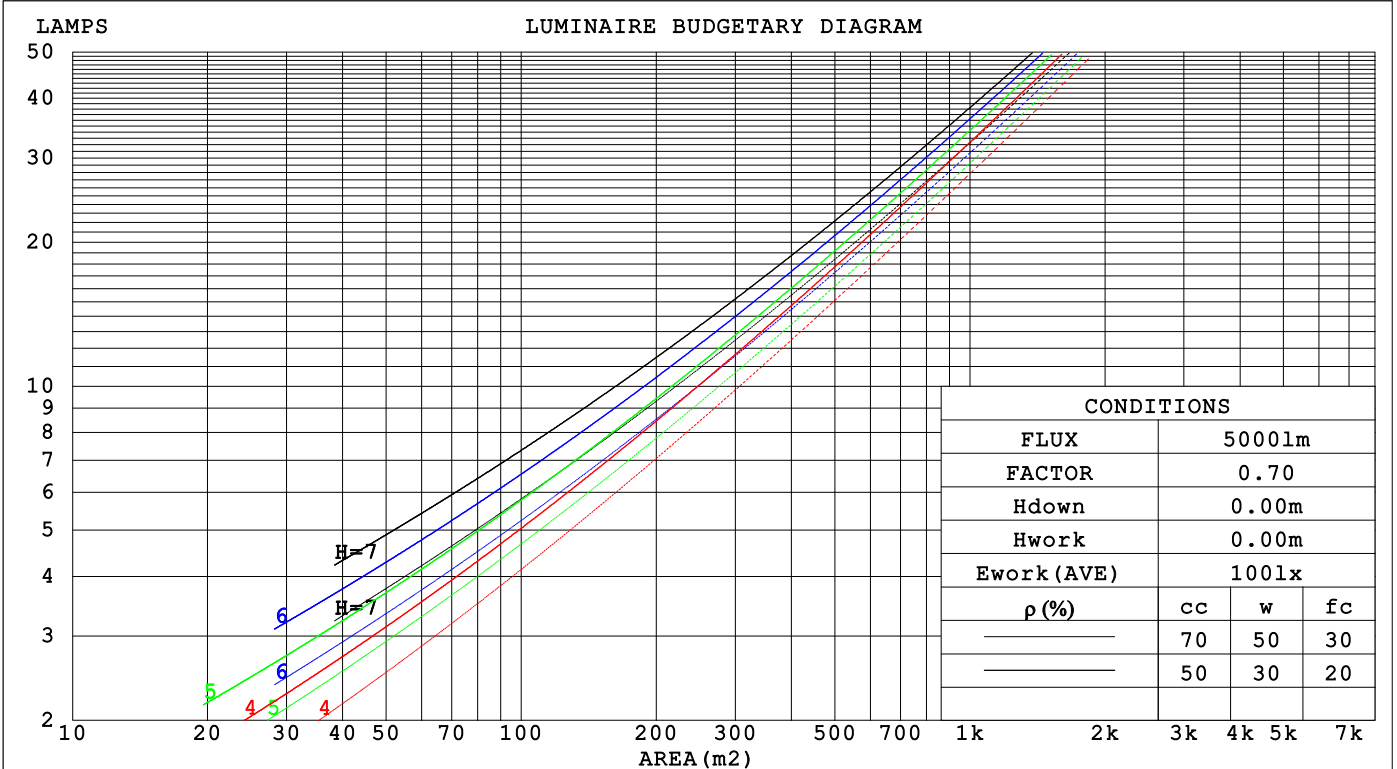

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz		
Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.316	.180	.057	.309	.176	.056	.295	.169	.054	.283	.163	.052	.272	.157	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.154	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.247	.136	.042	.238	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.157	.135	.156	.135	.116	.107	.093	.080	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.099	.149	.115	.085	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.075	.143	.100	.065	.098	.069	.046	.057	.040	.027	.018	.013	.009	
4.0	.159	.102	.059	.136	.088	.051	.094	.062	.036	.054	.036	.021	.017	.012	.007	
5.0	.151	.092	.048	.130	.080	.042	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.124	.072	.035	.085	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.034	.118	.067	.030	.082	.047	.021	.047	.027	.013	.015	.009	.004	
8.0	.131	.071	.030	.113	.062	.026	.078	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.125	.066	.026	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz										
Lamp Flux:493.839x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.: 3000K			
MFR.:			SUR.: 0.135				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.1	22.6	21.4	22.8	23.1	21.0	22.5	21.3	22.7	23.0
3H	22.7	24.1	23.0	24.3	24.6	22.5	23.9	22.8	24.2	24.4
4H	23.3	24.6	23.6	24.9	25.2	23.1	24.5	23.4	24.7	25.0
6H	23.8	25.1	24.1	25.3	25.6	23.5	24.8	23.9	25.1	25.4
8H	23.9	25.2	24.3	25.5	25.7	23.7	24.9	24.0	25.2	25.5
12H	24.0	25.2	24.4	25.5	25.8	23.7	24.9	24.1	25.2	25.5
4H 2H	21.7	23.1	22.0	23.3	23.6	21.6	23.0	22.0	23.2	23.5
3H	23.4	24.6	23.8	24.9	25.2	23.3	24.5	23.7	24.8	25.1
4H	24.2	25.3	24.6	25.6	26.0	24.1	25.1	24.4	25.5	25.8
6H	24.8	25.8	25.2	26.1	26.5	24.6	25.6	25.0	25.9	26.3
8H	25.0	25.9	25.5	26.3	26.7	24.8	25.7	25.2	26.1	26.5
12H	25.2	26.0	25.6	26.4	26.8	24.9	25.7	25.3	26.1	26.5
8H 4H	24.5	25.4	24.9	25.8	26.1	24.3	25.2	24.8	25.6	26.0
6H	25.2	26.0	25.7	26.4	26.8	25.1	25.8	25.5	26.2	26.6
8H	25.5	26.2	26.0	26.6	27.1	25.3	26.0	25.8	26.4	26.9
12H	25.8	26.3	26.3	26.8	27.3	25.5	26.1	26.0	26.5	27.0
12H 4H	24.5	25.3	24.9	25.7	26.1	24.4	25.2	24.8	25.6	26.0
6H	25.3	26.0	25.8	26.4	26.9	25.1	25.8	25.6	26.2	26.7
8H	25.6	26.2	26.1	26.7	27.2	25.4	26.0	25.9	26.4	26.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 493.8 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.5)
 Area: 0.0143 m2

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	70	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	83	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:

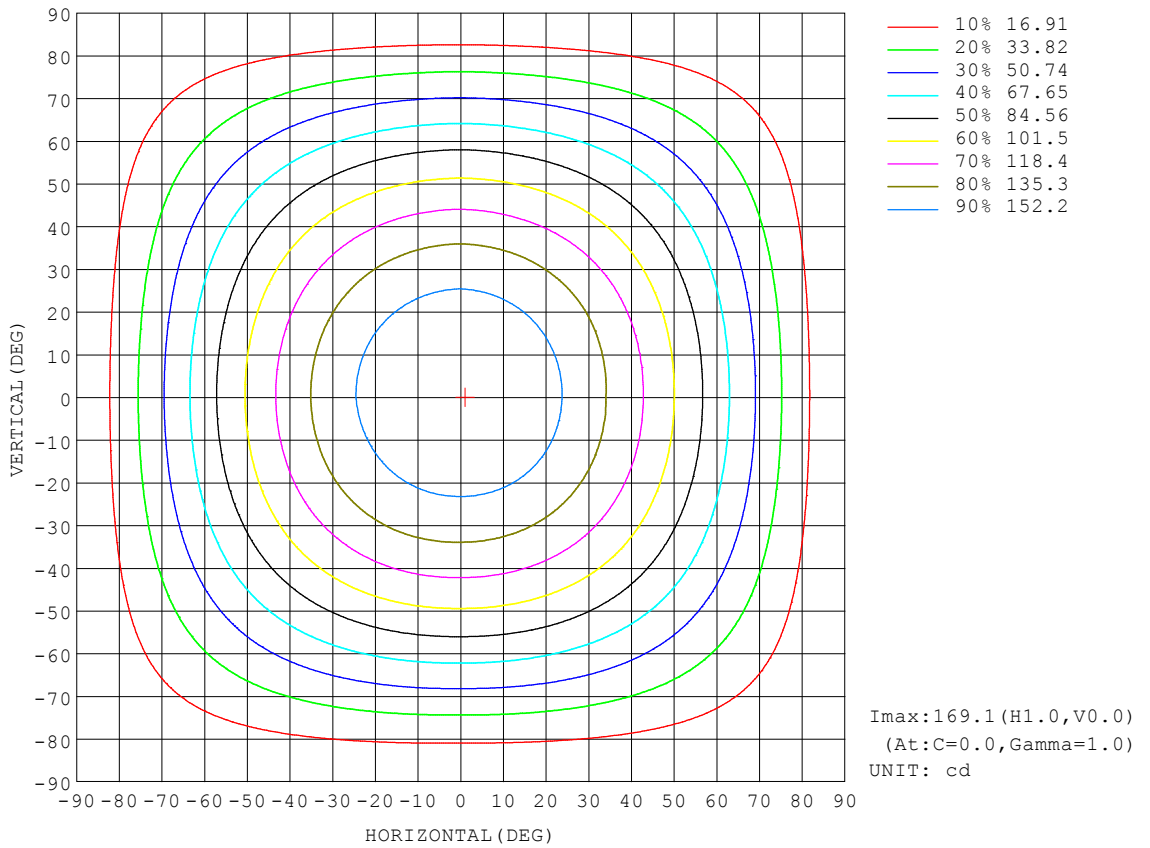


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:

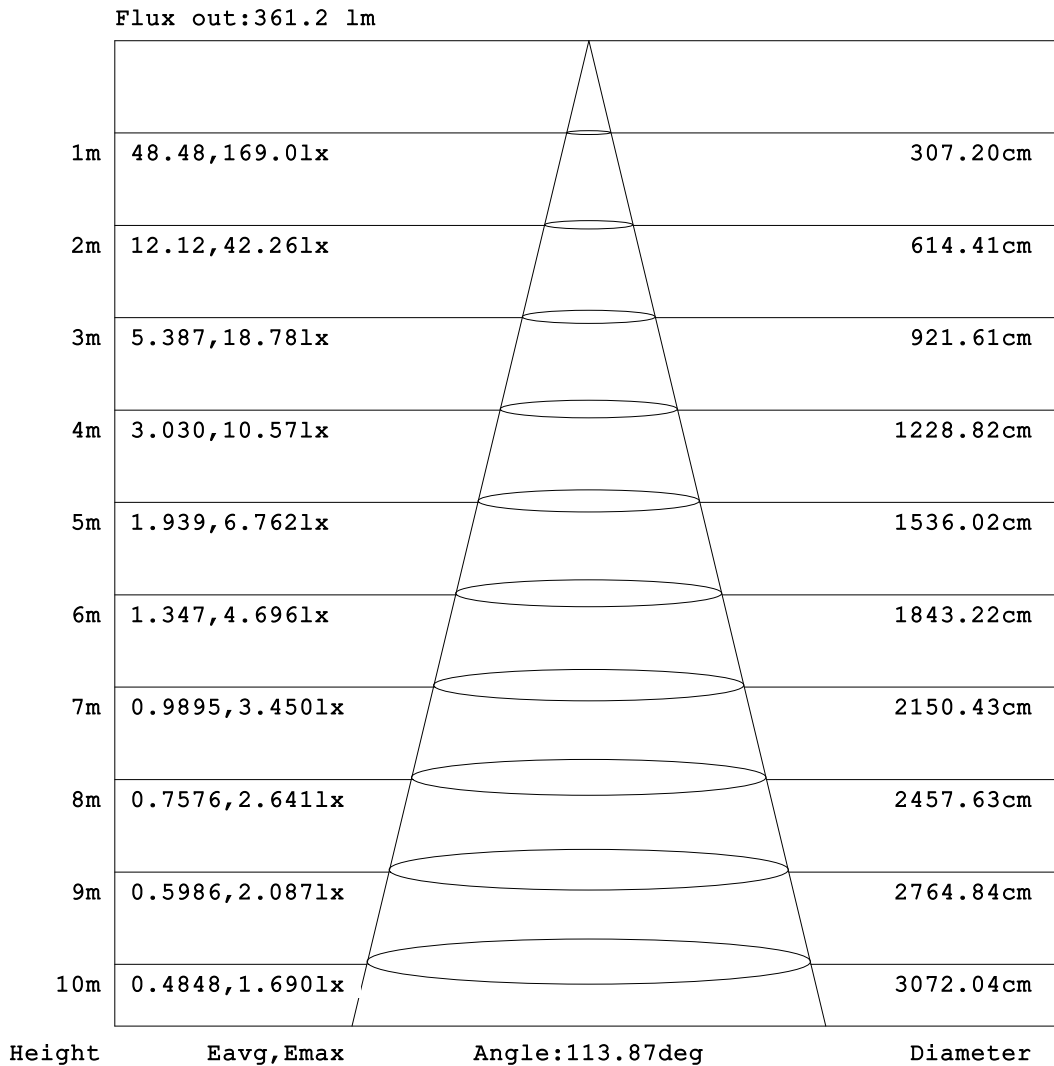


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:

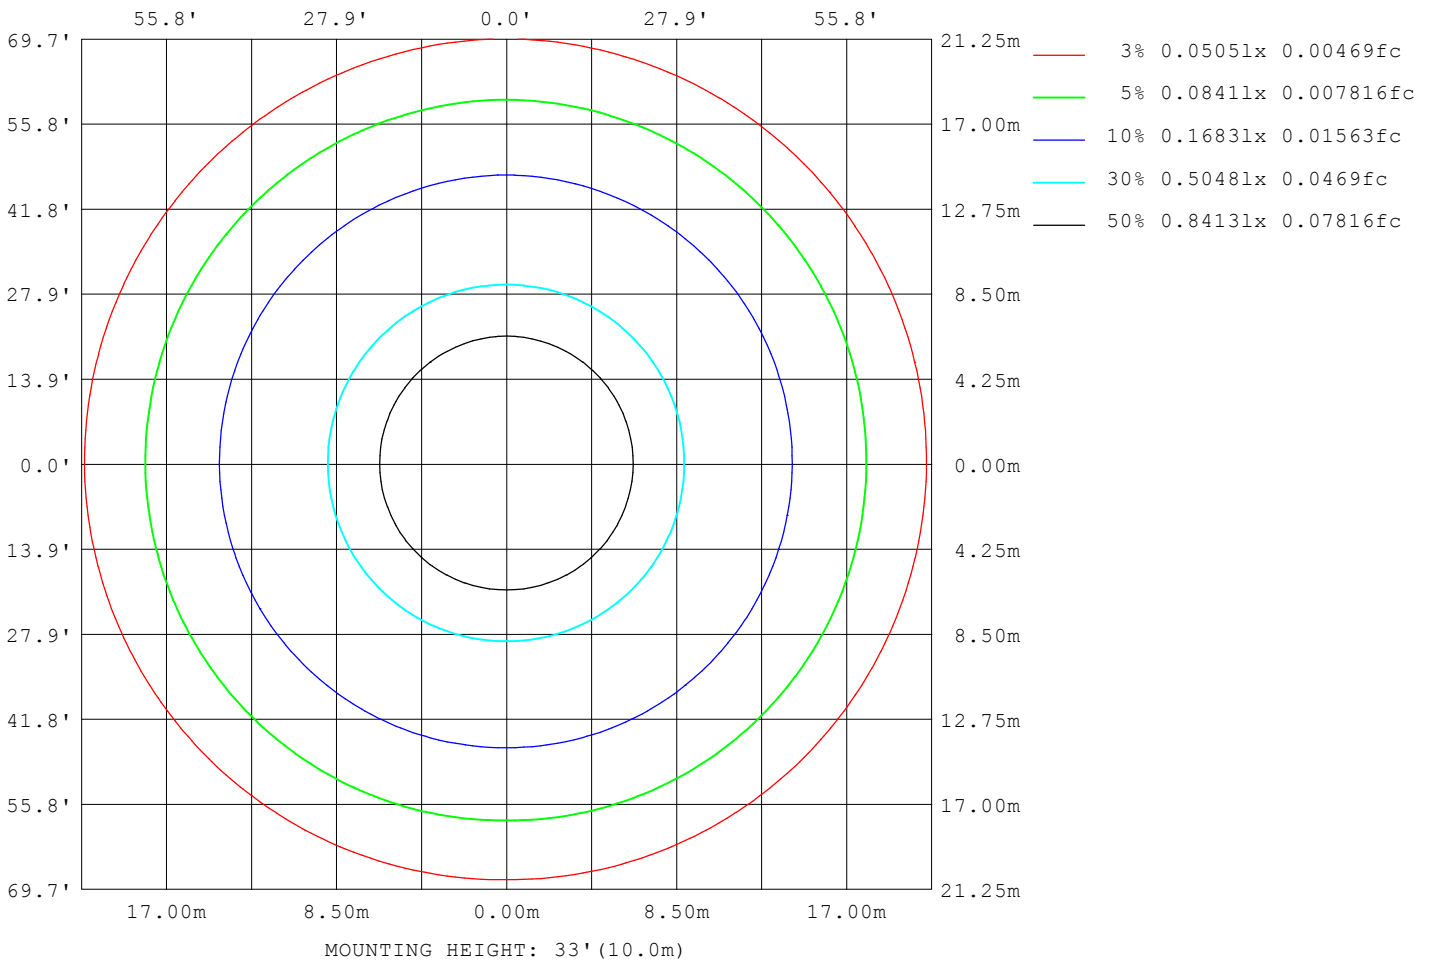

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10378
L_0~180 (75) av	9459
L_0~180 (85) av	7875
L_90~270 (65) av	10303
L_90~270 (75) av	9375
L_90~270 (85) av	7145
L_45 (65) av	10337
L_45 (75) av	9416
L_45 (85) av	7444

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Planar Illuminance Curve

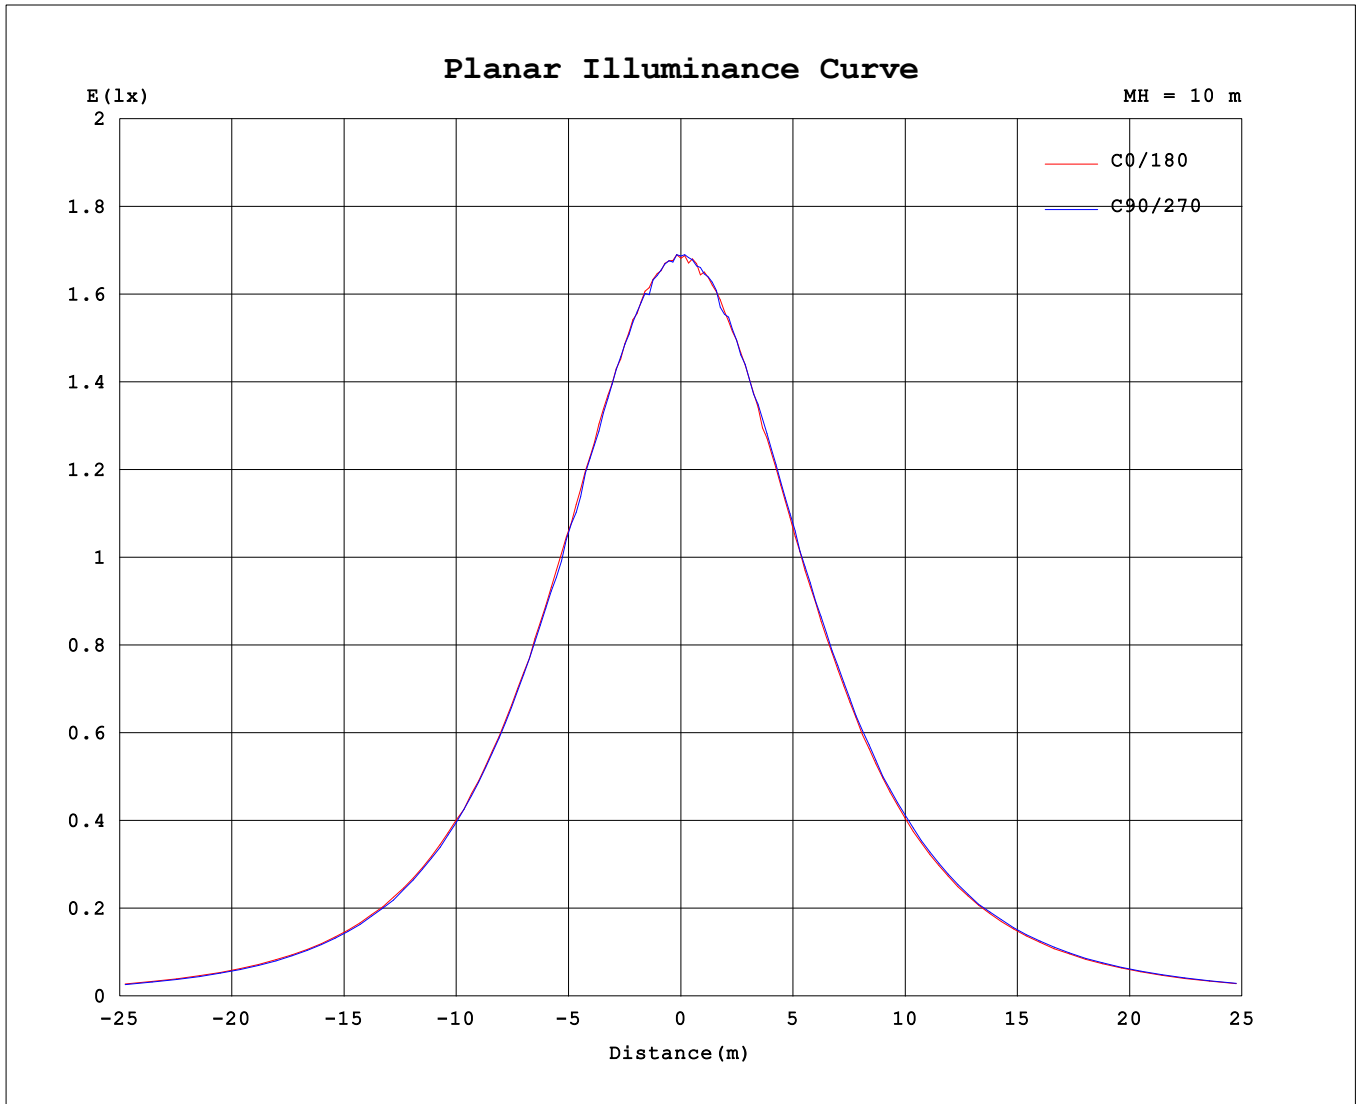

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.01V I:0.0657A P:7.5745W PF:0.9611 Freq:59.98Hz Lamp Flux:493.839x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3000K
MFR.:	SUR.: 0.135	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	168	168	168	168															
5	168	167	167	168															
10	166	165	166	164															
15	161	161	163	162															
20	157	155	156	158															
25	151	148	152	152															
30	144	142	144	145															
35	134	133	136	137															
40	125	123	126	127															
45	114	112	115	116															
50	102	99.8	103	105															
55	89.0	86.8	90.6	92.3															
60	75.9	73.6	77.2	78.8															
65	62.2	59.7	63.3	64.8															
70	48.1	45.8	49.4	51.1															
75	34.4	32.1	35.6	37.3															
80	21.3	19.2	22.3	23.9															
85	9.31	7.50	10.3	10.3															
90	0.03	0.06	0.30	0.66															
95	0.00	0.02	0.00	0.00															
100	0.00	0.02	0.01	0.00															
105	0.00	0.04	0.03	0.00															
110	0.00	0.07	0.07	0.02															
115	0.03	0.09	0.11	0.06															
120	0.07	0.14	0.14	0.08															
125	0.09	0.16	0.19	0.11															
130	0.12	0.20	0.22	0.16															
135	0.15	0.23	0.24	0.19															
140	0.18	0.24	0.28	0.22															
145	0.19	0.27	0.30	0.25															
150	0.22	0.29	0.33	0.28															
155	0.25	0.32	0.35	0.30															
160	0.28	0.35	0.38	0.33															
165	0.30	0.38	0.40	0.35															
170	0.34	0.38	0.44	0.37															
175	0.38	0.39	0.46	0.38															
180	0.39	0.39	0.43	0.39															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	168.5	168.5	168.5	168.5
3.0	168.6	168.1	169.0	168.3
6.0	167.7	166.8	168.1	167.2
9.0	167.0	166.0	166.9	166.7
12.0	165.0	163.9	164.6	165.2
15.0	161.4	161.5	163.0	162.0
18.0	159.5	158.2	160.1	159.4
21.0	155.4	154.2	156.5	157.4
24.0	151.9	149.2	153.0	153.6
27.0	148.1	146.9	148.4	149.7
30.0	143.7	142.0	144.0	145.0
33.0	138.4	136.8	138.8	140.1
36.0	132.7	131.4	133.8	135.0
39.0	126.4	125.2	127.2	129.0
42.0	119.8	118.6	121.4	121.9
45.0	113.8	111.9	114.9	116.5
48.0	106.6	104.8	107.8	109.6
51.0	99.37	97.42	100.3	102.2
54.0	92.02	89.73	92.91	94.39
57.0	83.90	81.72	85.15	87.02
60.0	75.86	73.56	77.20	78.75
63.0	67.61	65.20	68.97	70.66
66.0	58.71	56.98	60.59	62.23
69.0	50.99	48.34	52.15	53.82
72.0	42.02	40.28	43.83	45.54
75.0	34.44	32.14	35.58	37.26
78.0	26.37	24.30	27.45	29.16
81.0	18.80	16.76	19.94	21.03
84.0	11.63	9.750	12.60	12.50
87.0	4.988	3.396	5.921	5.057
90.0	0.0280	0.0551	0.3010	0.6640
93.0	0	0.0220	0	0
96.0	0	0.0166	0	0
99.0	0	0.0166	0.0001	0
102.0	0	0.0221	0.0111	0
105.0	0	0.0386	0.0334	0
108.0	0	0.0606	0.0609	0
111.0	0.0109	0.0772	0.0776	0.0111
114.0	0.0276	0.0938	0.0942	0.0331
117.0	0.0442	0.1159	0.1273	0.0552
120.0	0.0663	0.1379	0.1440	0.0827
123.0	0.0883	0.1545	0.1705	0.1048
126.0	0.0995	0.1765	0.1936	0.1213
129.0	0.1162	0.1932	0.2104	0.1489
132.0	0.1328	0.1988	0.2270	0.1765
135.0	0.1494	0.2263	0.2436	0.1930
138.0	0.1768	0.2318	0.2657	0.2151
141.0	0.1880	0.2483	0.2822	0.2262
144.0	0.1881	0.2649	0.2988	0.2482
147.0	0.2101	0.2803	0.3155	0.2648
150.0	0.2213	0.2936	0.3321	0.2759
153.0	0.2378	0.3090	0.3540	0.2978
156.0	0.2599	0.3255	0.3597	0.3034
159.0	0.2710	0.3367	0.3763	0.3255
162.0	0.2822	0.3587	0.3928	0.3365
165.0	0.2988	0.3752	0.3984	0.3476
168.0	0.3153	0.3820	0.4150	0.3531
171.0	0.3430	0.3838	0.4427	0.3642
174.0	0.3816	0.3856	0.4592	0.3697
177.0	0.3818	0.3862	0.4260	0.3807
180.0	0.3873	0.3862	0.4260	0.3862

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks: