
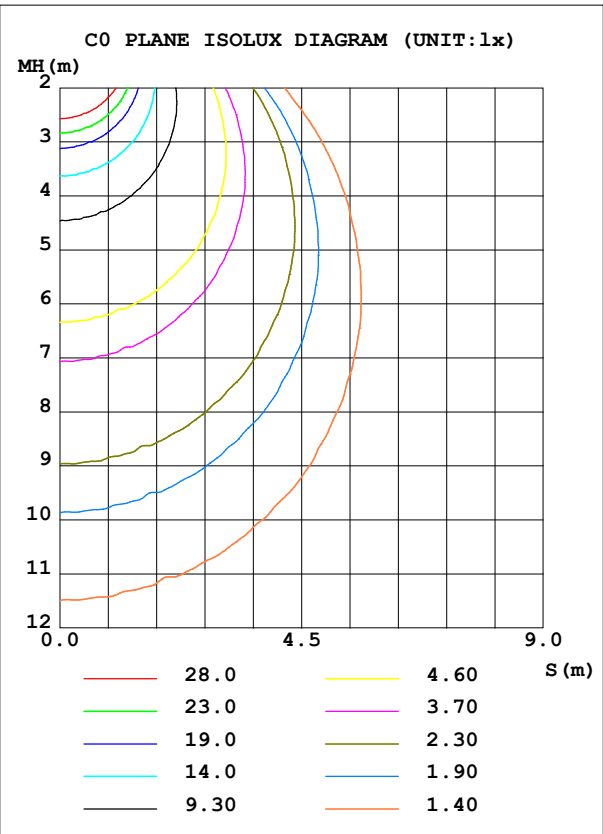


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	BRMF05LAJD1WH_4000K	Imax (cd)	185.0	S/MH (C0/180)	1.27
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	540.60	η UP, DN (C0-180)	0.1,49.1
NOMINAL FLUX (lm)	540.602	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1,50.7
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	99.8	CIBSE SHR MAX	1.35

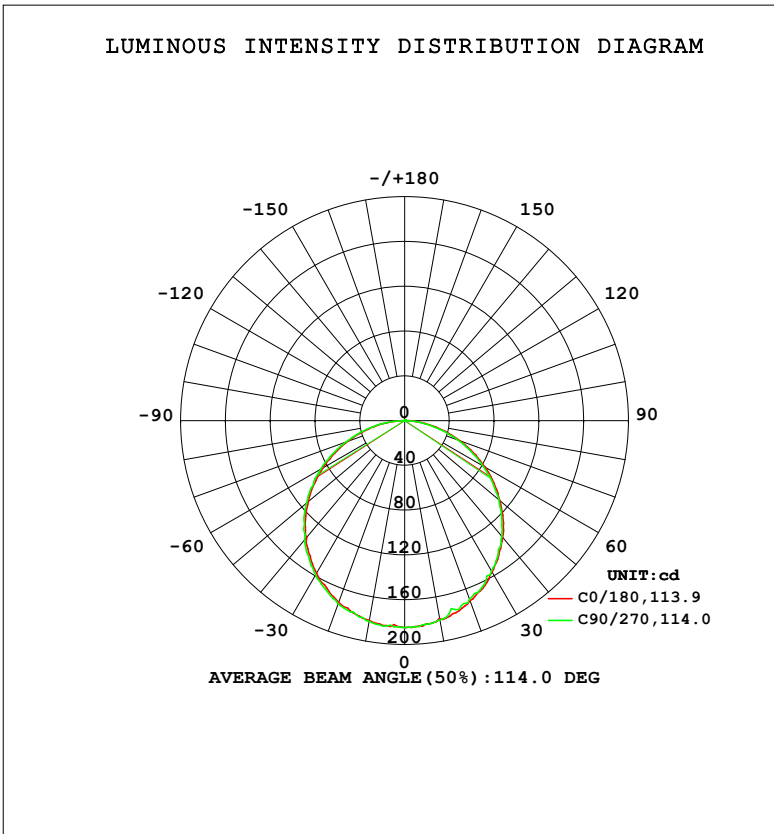

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	179.3	180.8	181.3	182.1					0- 10	17.47	17.47	3.23,3.23
20	171.1	169.6	172.9	174.0					10- 20	50.01	67.48	12.5,12.5
30	156.3	155.4	157.5	158.9					20- 30	76.14	143.6	26.6,26.6
40	136.2	135.3	136.1	139.3					30- 40	92.30	235.9	43.6,43.6
50	110.8	109.8	112.6	114.2					40- 50	96.29	332.2	61.5,61.5
60	83.04	80.29	84.37	86.14					50- 60	87.66	419.9	77.7,77.7
70	52.68	50.11	53.87	56.20					60- 70	67.72	487.6	90.2,90.2
80	23.26	21.05	24.50	26.10					70- 80	40.33	527.9	97.7,97.7
90	0.0345	0.0663	0.3497	0.7382					80- 90	11.72	539.6	99.8,99.8
100	0	0.0276	0.0166	0					90-100	0.0276	539.7	99.8,99.8
110	0.0110	0.0830	0.0830	0.0221					100-110	0.0268	539.7	99.8,99.8
120	0.0882	0.1603	0.1603	0.1050					110-120	0.0892	539.8	99.8,99.8
130	0.1491	0.2157	0.2431	0.1878					120-130	0.1469	539.9	99.9,99.9
140	0.2043	0.2764	0.3148	0.2597					130-140	0.1790	540.1	99.9,99.9
150	0.2540	0.3317	0.3712	0.3151					140-150	0.1820	540.3	99.9,99.9
160	0.3202	0.3870	0.4198	0.3703					150-160	0.1602	540.4	100,100
170	0.3809	0.4446	0.4806	0.4101					160-170	0.1130	540.6	100,100
180	0.4307	0.4367	0.4639	0.4312					170-180	0.0422	540.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:

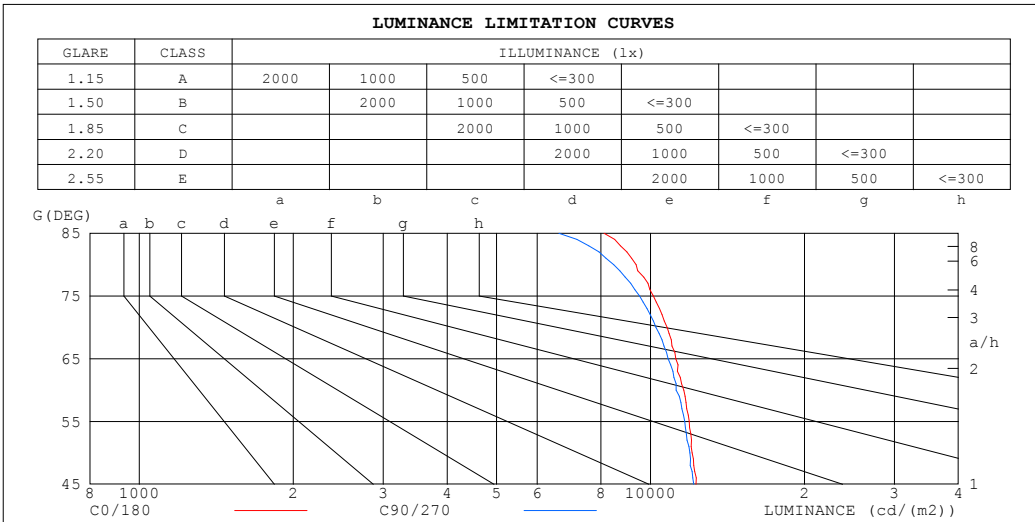

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8107	6623
80	9373	8475
75	10128	9521
70	10777	10241
65	11212	10829
60	11620	11224
55	11896	11665
50	12065	11938
45	12279	12139


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

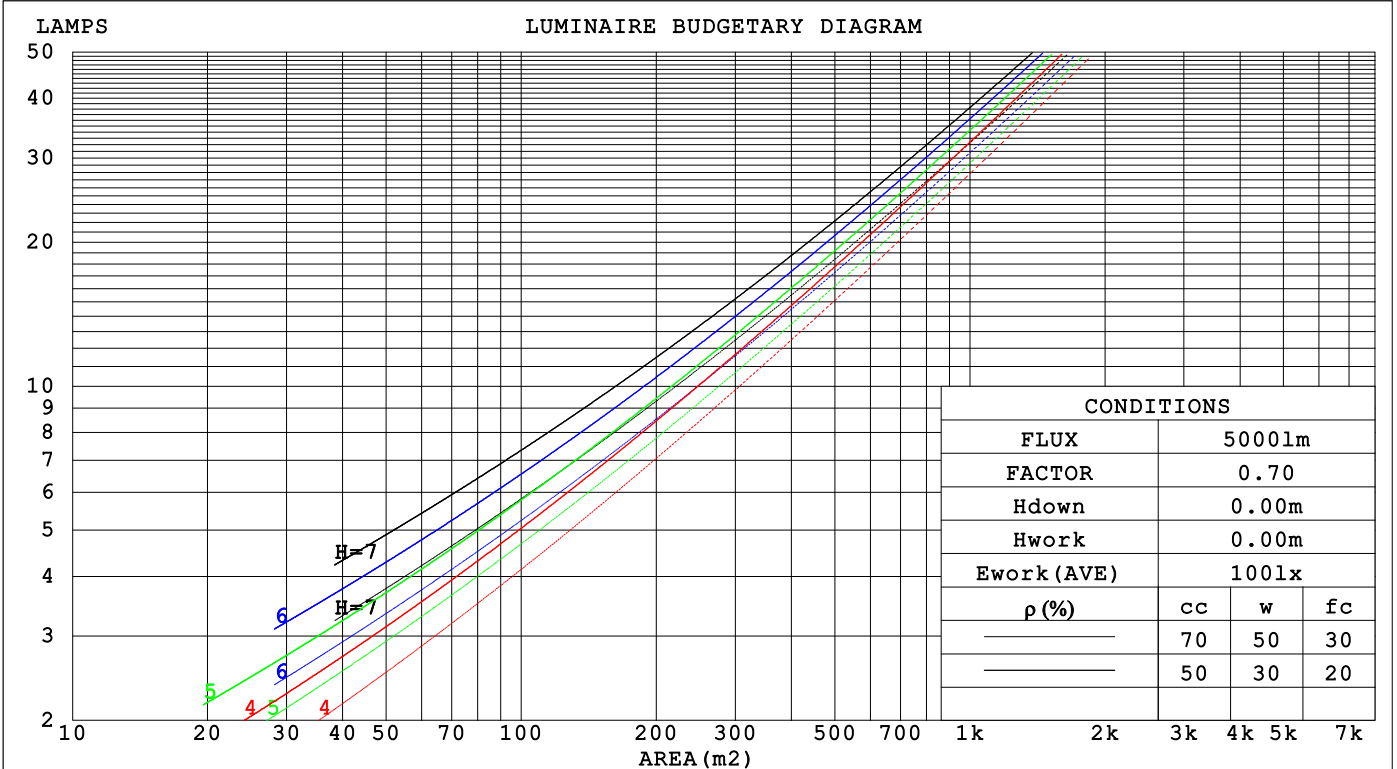

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz		
Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.316	.180	.057	.309	.176	.056	.295	.169	.054	.283	.163	.052	.272	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.155	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.247	.136	.042	.238	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.157	.135	.156	.135	.116	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.099	.149	.115	.085	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.075	.143	.100	.065	.098	.069	.046	.057	.040	.027	.018	.013	.009	
4.0	.159	.102	.059	.136	.089	.052	.094	.062	.036	.054	.036	.021	.017	.012	.007	
5.0	.151	.092	.048	.130	.080	.042	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.124	.072	.035	.085	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.034	.118	.067	.030	.082	.047	.021	.047	.028	.013	.015	.009	.004	
8.0	.131	.071	.030	.113	.062	.026	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.103	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.4	23.0	21.7	23.2	23.4	21.3	22.9	21.6	23.1	23.3
3H	23.0	24.4	23.3	24.6	24.9	22.8	24.3	23.1	24.5	24.7
4H	23.6	25.0	23.9	25.2	25.5	23.4	24.8	23.8	25.0	25.3
6H	24.1	25.4	24.4	25.6	25.9	23.9	25.1	24.2	25.4	25.7
8H	24.3	25.5	24.6	25.8	26.1	24.0	25.2	24.3	25.5	25.8
12H	24.4	25.5	24.7	25.8	26.1	24.1	25.2	24.4	25.5	25.9
4H 2H	22.0	23.4	22.3	23.6	23.9	22.0	23.3	22.3	23.6	23.8
3H	23.8	25.0	24.1	25.3	25.6	23.7	24.8	24.0	25.1	25.4
4H	24.5	25.6	24.9	25.9	26.3	24.4	25.5	24.8	25.8	26.1
6H	25.1	26.1	25.5	26.5	26.8	24.9	25.9	25.3	26.3	26.6
8H	25.4	26.3	25.8	26.6	27.0	25.1	26.0	25.5	26.4	26.8
12H	25.5	26.3	25.9	26.7	27.1	25.2	26.0	25.7	26.4	26.8
8H 4H	24.8	25.7	25.2	26.1	26.5	24.7	25.6	25.1	25.9	26.3
6H	25.6	26.3	26.0	26.7	27.2	25.4	26.1	25.8	26.5	27.0
8H	25.9	26.5	26.3	27.0	27.4	25.6	26.3	26.1	26.7	27.2
12H	26.1	26.7	26.6	27.1	27.6	25.8	26.4	26.3	26.8	27.3
12H 4H	24.8	25.6	25.2	26.0	26.4	24.7	25.5	25.1	25.9	26.3
6H	25.6	26.3	26.1	26.7	27.2	25.4	26.1	25.9	26.5	27.0
8H	26.0	26.5	26.4	27.0	27.5	25.7	26.3	26.2	26.8	27.2

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.2	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3

CIE Pub.117, 540.6 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.1)
Area: 0.0143 m2

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 90.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.800m [K=1.0000]
Test Date:2025-12-03	Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	77	70	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	83	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:

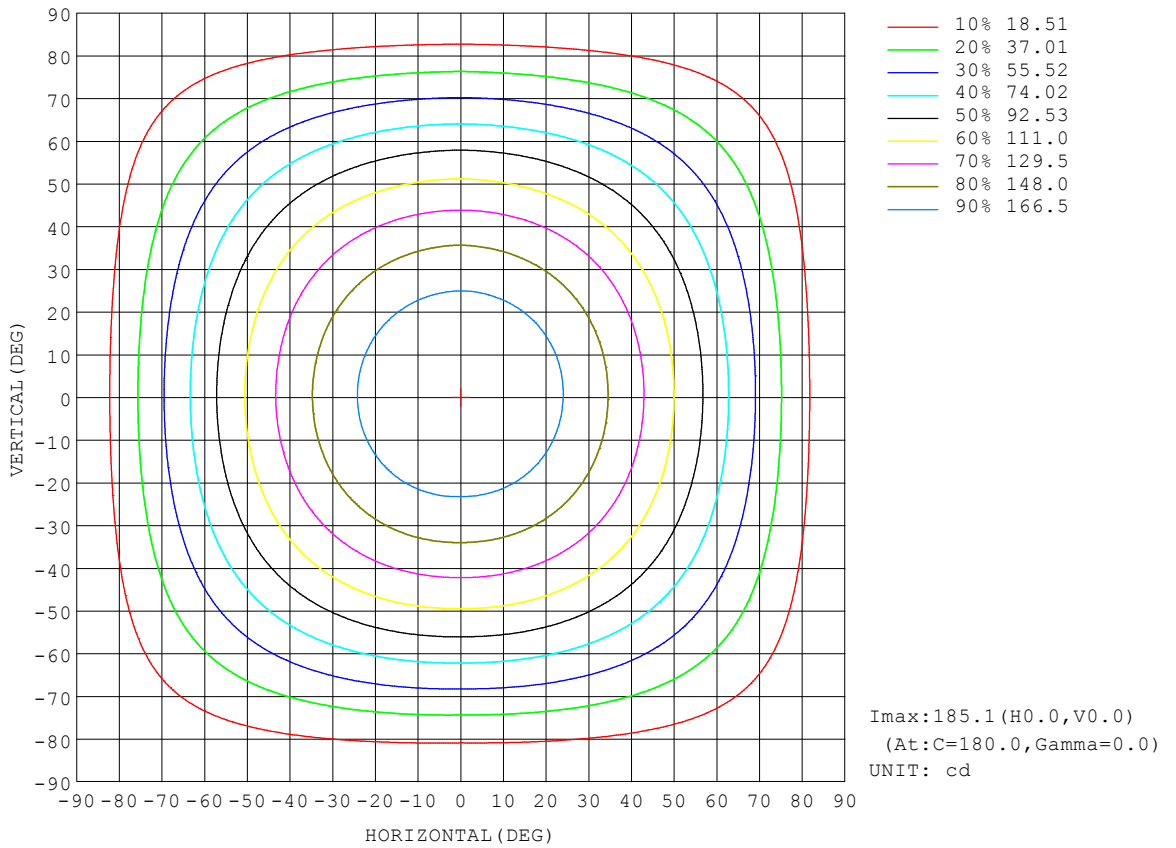


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:

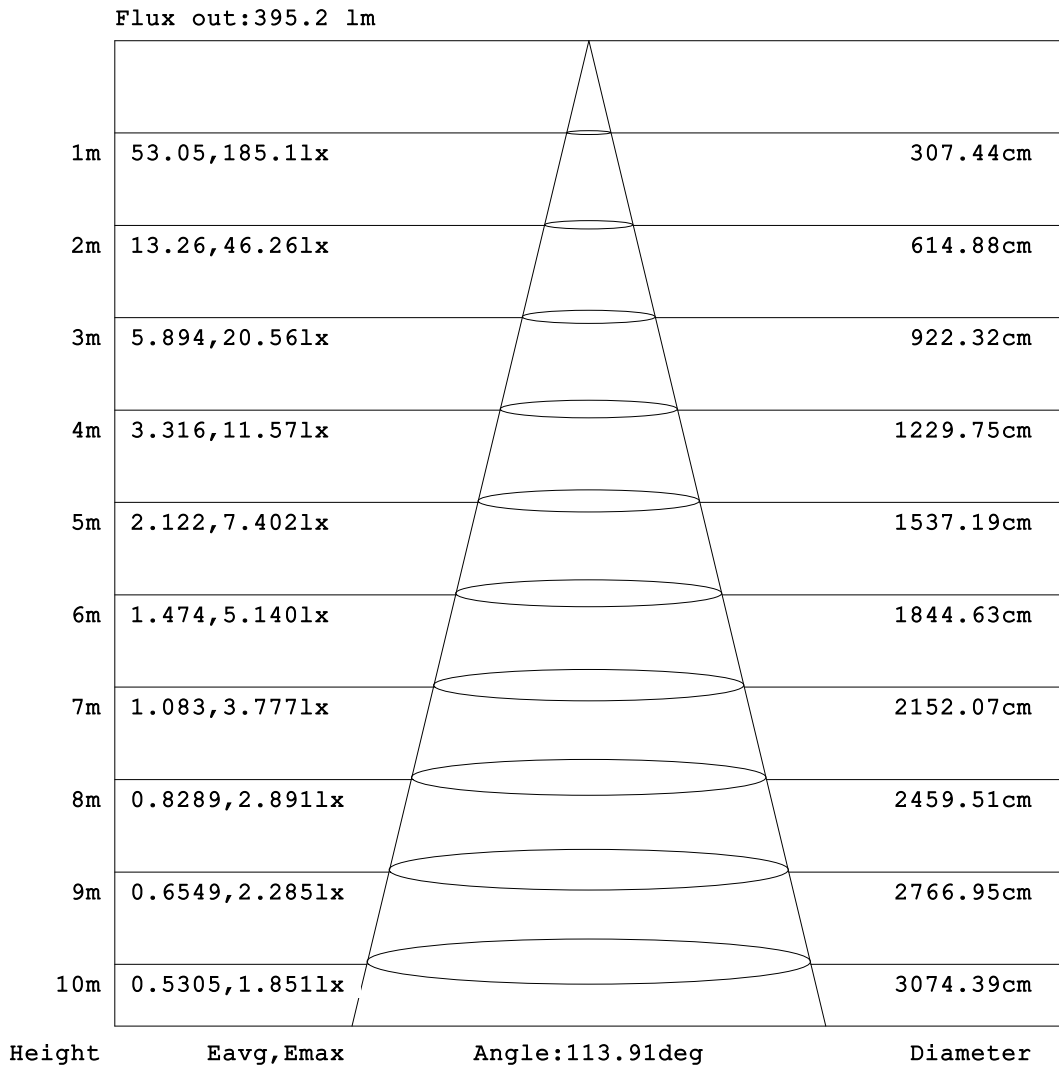


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:

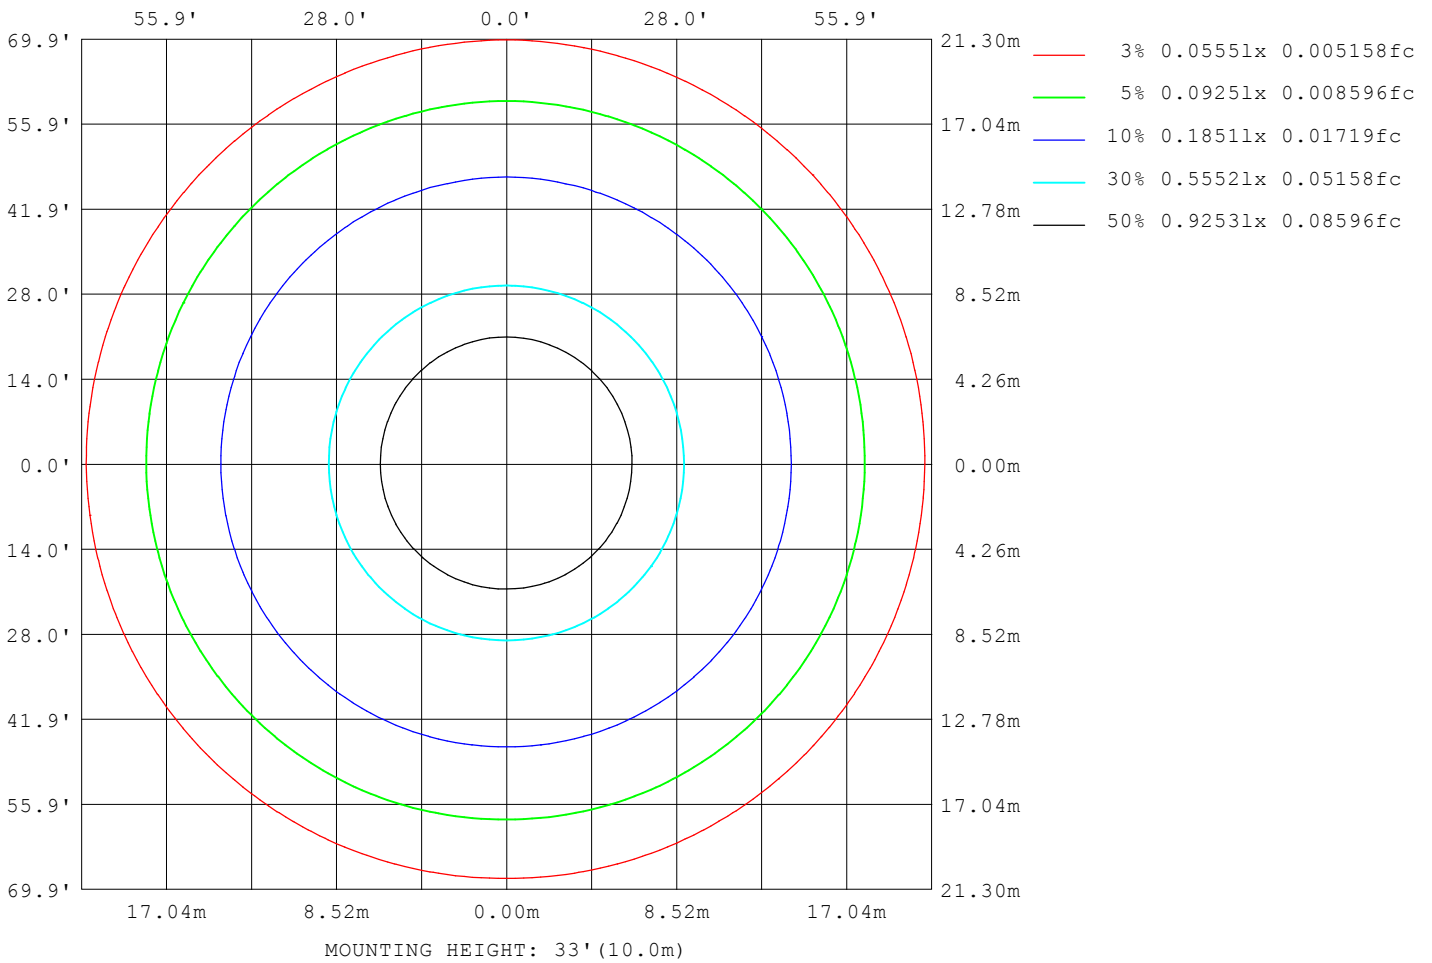

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11307
L_0~180 (75) av	10314
L_0~180 (85) av	8588
L_90~270 (65) av	11337
L_90~270 (75) av	10277
L_90~270 (85) av	7866
L_45 (65) av	11332
L_45 (75) av	10303
L_45 (85) av	8167

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

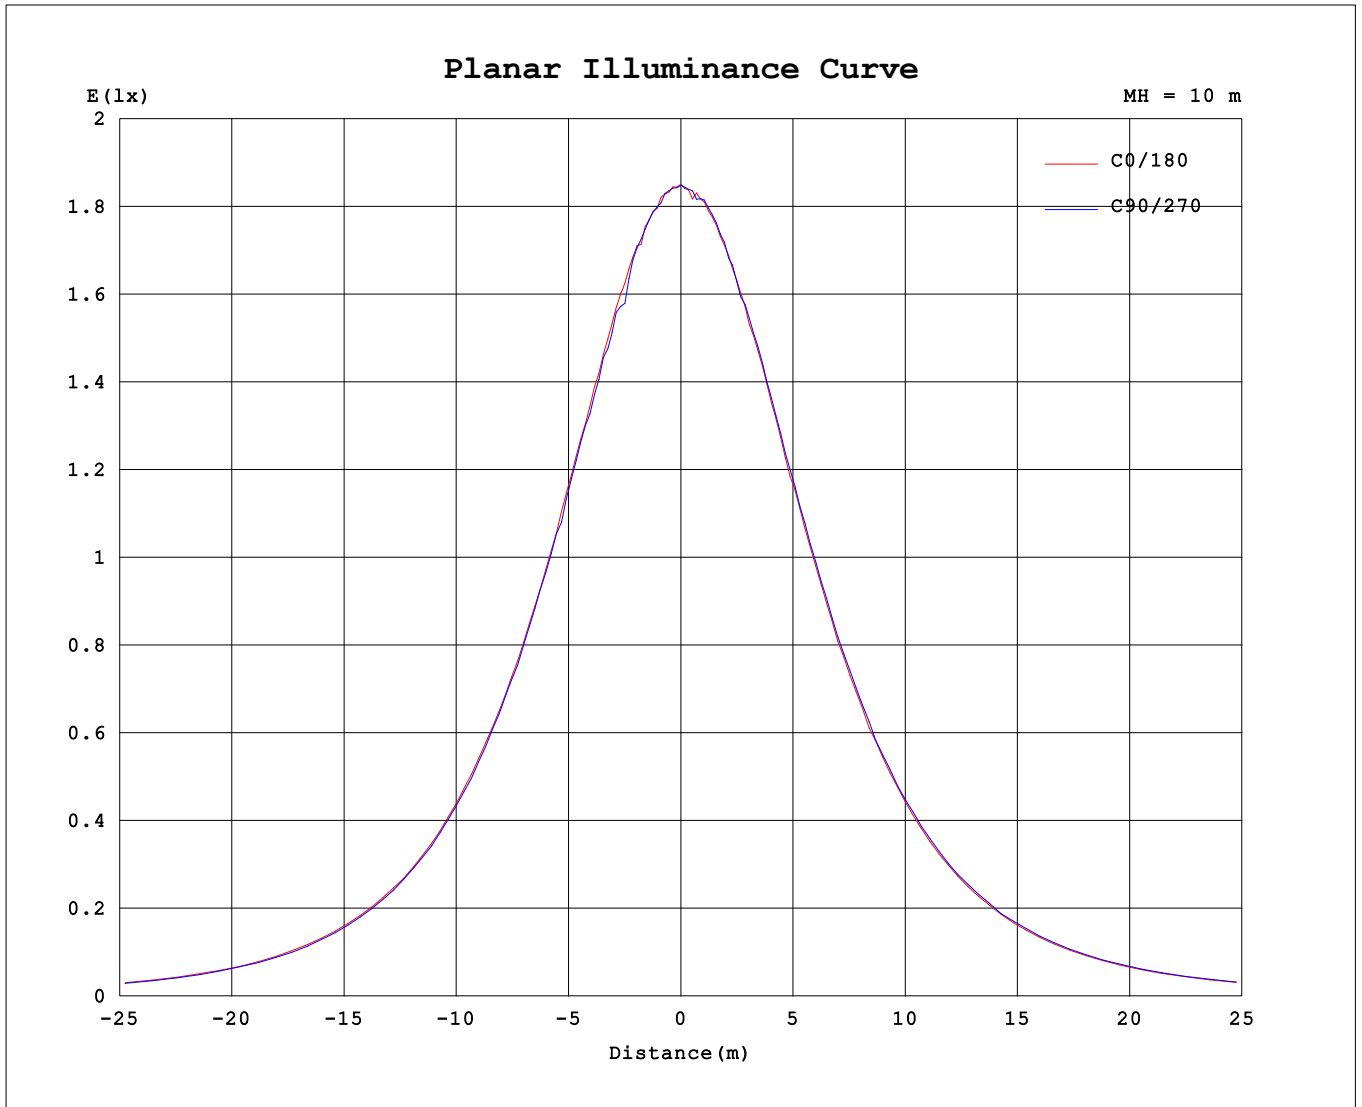

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0655A P:7.5600W PF:0.9614 Freq:59.98Hz Lamp Flux:540.602x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.135	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	185	185	185	185															
5	184	183	184	184															
10	179	181	181	182															
15	178	175	178	177															
20	171	170	173	174															
25	165	164	165	166															
30	156	155	158	159															
35	147	146	147	149															
40	136	135	136	139															
45	124	123	125	127															
50	111	110	113	114															
55	97.5	95.7	98.6	99.6															
60	83.0	80.3	84.4	86.1															
65	67.7	65.5	68.9	71.5															
70	52.7	50.1	53.9	56.2															
75	37.5	35.3	38.9	40.8															
80	23.3	21.1	24.5	26.1															
85	10.1	8.26	11.3	11.3															
90	0.03	0.07	0.35	0.74															
95	0.00	0.03	0.01	0.00															
100	0.00	0.03	0.02	0.00															
105	0.00	0.04	0.05	0.00															
110	0.01	0.08	0.08	0.02															
115	0.05	0.12	0.12	0.07															
120	0.09	0.16	0.16	0.10															
125	0.12	0.19	0.20	0.14															
130	0.15	0.22	0.24	0.19															
135	0.18	0.25	0.28	0.22															
140	0.20	0.28	0.31	0.26															
145	0.23	0.31	0.34	0.29															
150	0.25	0.33	0.37	0.32															
155	0.29	0.36	0.40	0.35															
160	0.32	0.39	0.42	0.37															
165	0.34	0.41	0.45	0.39															
170	0.38	0.44	0.48	0.41															
175	0.43	0.44	0.51	0.42															
180	0.43	0.44	0.46	0.43															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	185.0	185.0	185.0	185.0
3.0	184.0	184.4	182.4	184.5
6.0	182.5	183.0	184.0	184.6
9.0	182.0	181.5	182.3	183.0
12.0	180.0	179.4	180.3	179.9
15.0	177.6	174.6	177.8	177.0
18.0	174.2	171.7	174.9	175.8
21.0	170.6	168.6	171.4	172.1
24.0	166.5	165.7	166.9	168.3
27.0	162.0	160.3	162.9	164.1
30.0	156.3	155.4	157.5	158.9
33.0	150.8	149.9	151.8	153.8
36.0	144.3	142.6	145.9	147.5
39.0	138.4	137.1	139.9	141.6
42.0	132.0	130.2	132.5	134.1
45.0	124.1	122.8	125.4	127.0
48.0	116.2	114.4	117.7	120.0
51.0	108.0	107.0	109.9	111.4
54.0	100.2	98.39	101.8	103.9
57.0	91.65	89.70	93.09	95.44
60.0	83.04	80.29	84.37	86.14
63.0	73.20	71.83	75.00	77.44
66.0	64.82	62.57	66.27	68.34
69.0	55.67	53.27	57.15	59.16
72.0	46.54	44.16	48.01	50.09
75.0	37.47	35.26	38.88	40.81
78.0	28.82	26.54	30.22	31.93
81.0	20.53	18.30	21.84	23.43
84.0	12.72	10.73	13.82	14.19
87.0	5.450	3.711	6.438	5.501
90.0	0.0345	0.0663	0.3497	0.7382
93.0	0.0001	0.0331	0.0055	0
96.0	0	0.0276	0.0055	0
99.0	0	0.0276	0.0166	0
102.0	0	0.0332	0.0222	0
105.0	0	0.0443	0.0498	0
108.0	0	0.0664	0.0719	0.0164
111.0	0.0220	0.0940	0.0995	0.0386
114.0	0.0441	0.1106	0.1215	0.0607
117.0	0.0662	0.1382	0.1382	0.0829
120.0	0.0882	0.1603	0.1603	0.1050
123.0	0.1103	0.1715	0.1879	0.1271
126.0	0.1269	0.1990	0.2155	0.1492
129.0	0.1490	0.2211	0.2375	0.1768
132.0	0.1546	0.2377	0.2597	0.2044
135.0	0.1767	0.2488	0.2762	0.2210
138.0	0.2042	0.2654	0.2928	0.2377
141.0	0.2152	0.2820	0.3148	0.2653
144.0	0.2264	0.3018	0.3369	0.2819
147.0	0.2396	0.3118	0.3535	0.2984
150.0	0.2540	0.3317	0.3712	0.3151
153.0	0.2761	0.3428	0.3910	0.3371
156.0	0.2981	0.3594	0.4087	0.3483
159.0	0.3093	0.3815	0.4142	0.3648
162.0	0.3258	0.3980	0.4363	0.3869
165.0	0.3423	0.4148	0.4474	0.3925
168.0	0.3588	0.4430	0.4695	0.4057
171.0	0.3865	0.4453	0.4973	0.4124
174.0	0.4305	0.4477	0.5068	0.4190
177.0	0.4307	0.4367	0.4639	0.4256
180.0	0.4307	0.4367	0.4639	0.4312

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks: