
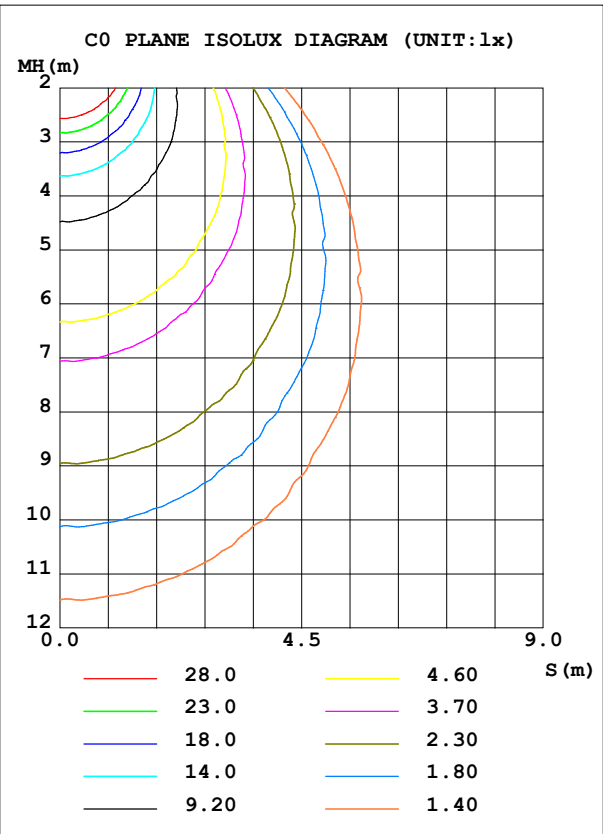


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	BRMF05LAJD1WH_5000K	Imax (cd)	185.1	S/MH (C0/180)	1.27
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	540.97	η UP, DN (C0-180)	0.1,49.1
NOMINAL FLUX (lm)	540.975	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1,50.8
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	99.8	CIBSE SHR MAX	1.35

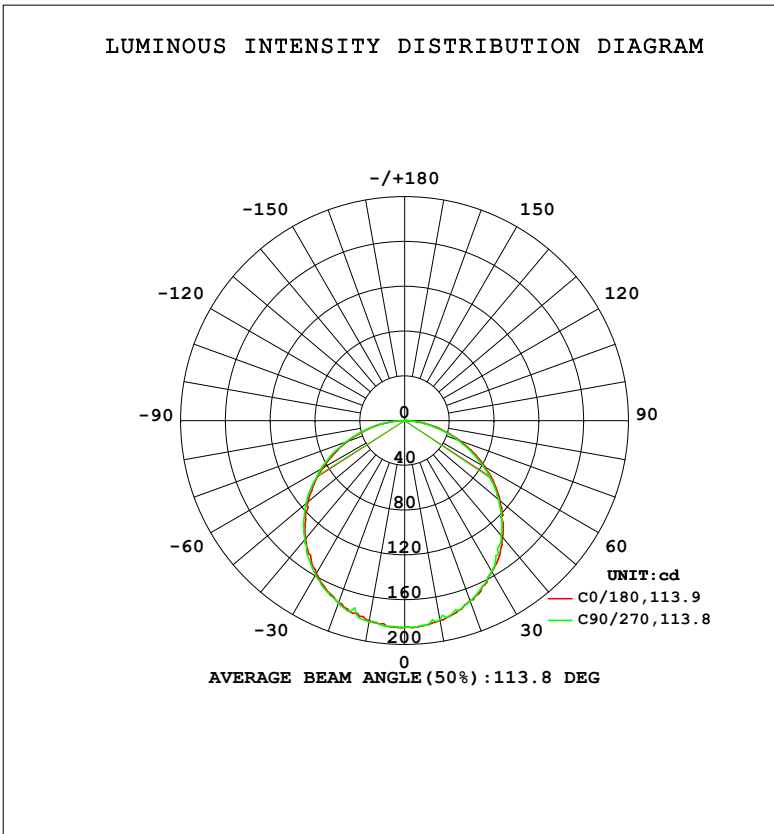

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	181.1	180.7	181.3	182.5					0- 10	17.46	17.46	3.23,3.23
20	171.0	171.5	173.1	173.2					10- 20	50.07	67.54	12.5,12.5
30	156.0	155.7	158.0	159.3					20- 30	76.26	143.8	26.6,26.6
40	136.1	134.1	137.6	139.1					30- 40	92.27	236.1	43.6,43.6
50	111.4	109.8	112.9	114.9					40- 50	96.33	332.4	61.4,61.4
60	83.14	80.80	84.09	86.66					50- 60	87.77	420.2	77.7,77.7
70	52.58	50.27	54.22	56.28					60- 70	67.76	487.9	90.2,90.2
80	23.33	21.11	24.56	26.19					70- 80	40.34	528.3	97.7,97.7
90	0.0400	0.0717	0.3553	0.7321					80- 90	11.74	540.0	99.8,99.8
100	0	0.0277	0.0220	0					90-100	0.0278	540.0	99.8,99.8
110	0.0055	0.0829	0.0831	0.0220					100-110	0.0269	540.1	99.8,99.8
120	0.0883	0.1548	0.1604	0.1049					110-120	0.0888	540.2	99.8,99.8
130	0.1492	0.2156	0.2432	0.1823					120-130	0.1466	540.3	99.9,99.9
140	0.2044	0.2799	0.3096	0.2541					130-140	0.1797	540.5	99.9,99.9
150	0.2596	0.3205	0.3703	0.3149					140-150	0.1829	540.7	99.9,99.9
160	0.3160	0.3812	0.4256	0.3756					150-160	0.1593	540.8	100,100
170	0.3866	0.4337	0.4809	0.4121					160-170	0.1130	540.9	100,100
180	0.4310	0.4364	0.4697	0.4309					170-180	0.0423	541.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:

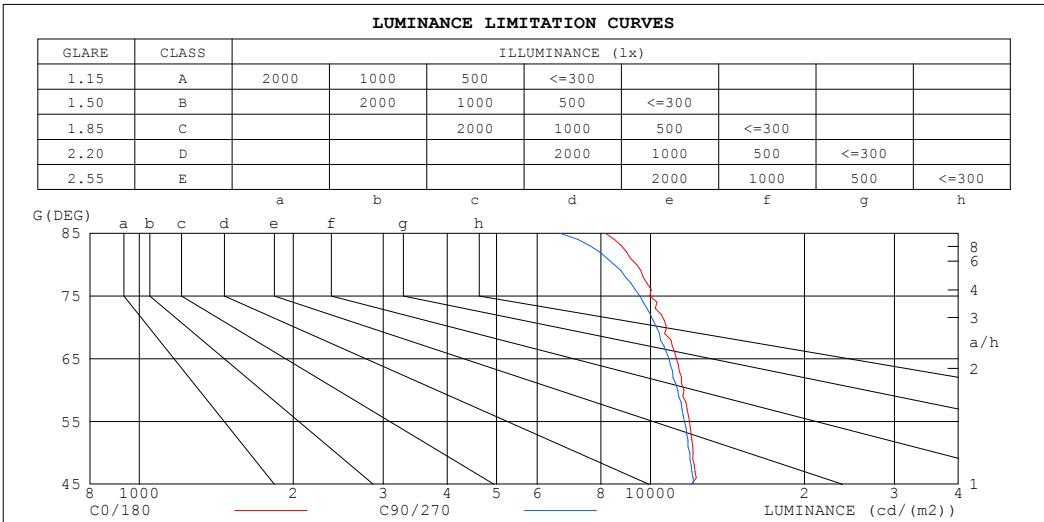

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8160	6645
80	9393	8501
75	9970	9535
70	10749	10280
65	11240	10869
60	11627	11302
55	11918	11653
50	12118	11942
45	12034	12131


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

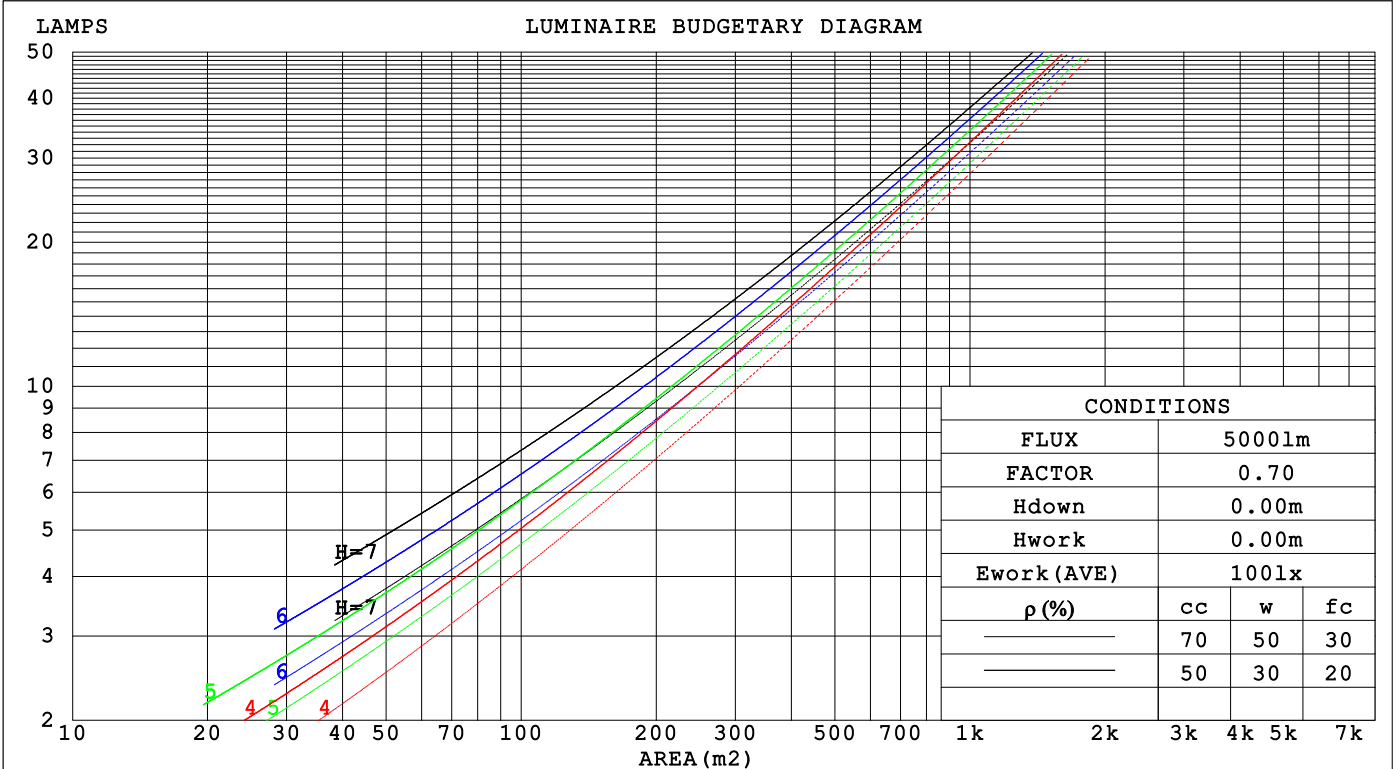

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz		
Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.316	.180	.057	.309	.176	.056	.295	.169	.054	.283	.163	.052	.272	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.155	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.247	.136	.042	.238	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.157	.135	.156	.135	.116	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.099	.149	.115	.085	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.075	.143	.100	.065	.098	.069	.046	.057	.040	.027	.018	.013	.009	
4.0	.159	.102	.059	.136	.089	.052	.094	.062	.036	.054	.036	.021	.017	.012	.007	
5.0	.151	.092	.048	.130	.080	.042	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.124	.072	.035	.085	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.034	.118	.067	.030	.082	.047	.021	.047	.028	.013	.015	.009	.004	
8.0	.131	.071	.030	.113	.062	.026	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.103	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz										
Lamp Flux:540.975x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.: 5000K			
MFR.:			SUR.: 0.135				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.4	23.0	21.7	23.2	23.4	21.3	22.9	21.6	23.1	23.3
3H	23.0	24.4	23.3	24.6	24.9	22.8	24.3	23.1	24.5	24.7
4H	23.6	25.0	23.9	25.2	25.5	23.4	24.8	23.8	25.0	25.3
6H	24.1	25.4	24.4	25.6	25.9	23.9	25.1	24.2	25.4	25.7
8H	24.2	25.5	24.6	25.8	26.1	24.0	25.2	24.3	25.5	25.8
12H	24.3	25.5	24.7	25.8	26.1	24.1	25.2	24.4	25.5	25.9
4H 2H	22.0	23.4	22.3	23.6	23.9	22.0	23.3	22.3	23.6	23.8
3H	23.8	25.0	24.1	25.3	25.6	23.6	24.8	24.0	25.1	25.4
4H	24.5	25.6	24.9	25.9	26.3	24.4	25.5	24.8	25.8	26.1
6H	25.1	26.1	25.5	26.5	26.8	24.9	25.9	25.3	26.2	26.6
8H	25.4	26.2	25.8	26.6	27.0	25.1	26.0	25.5	26.4	26.8
12H	25.5	26.3	25.9	26.7	27.1	25.2	26.0	25.7	26.4	26.8
8H 4H	24.8	25.7	25.2	26.1	26.5	24.7	25.6	25.1	25.9	26.3
6H	25.6	26.3	26.0	26.7	27.1	25.4	26.1	25.8	26.5	27.0
8H	25.9	26.5	26.3	27.0	27.4	25.6	26.3	26.1	26.7	27.2
12H	26.1	26.7	26.6	27.1	27.6	25.8	26.4	26.3	26.8	27.3
12H 4H	24.8	25.6	25.2	26.0	26.4	24.7	25.5	25.1	25.9	26.3
6H	25.6	26.3	26.1	26.7	27.2	25.4	26.1	25.9	26.5	27.0
8H	26.0	26.5	26.4	27.0	27.5	25.7	26.3	26.2	26.8	27.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 541.0 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.1)
 Area: 0.0143 m2

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	77	70	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	83	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:

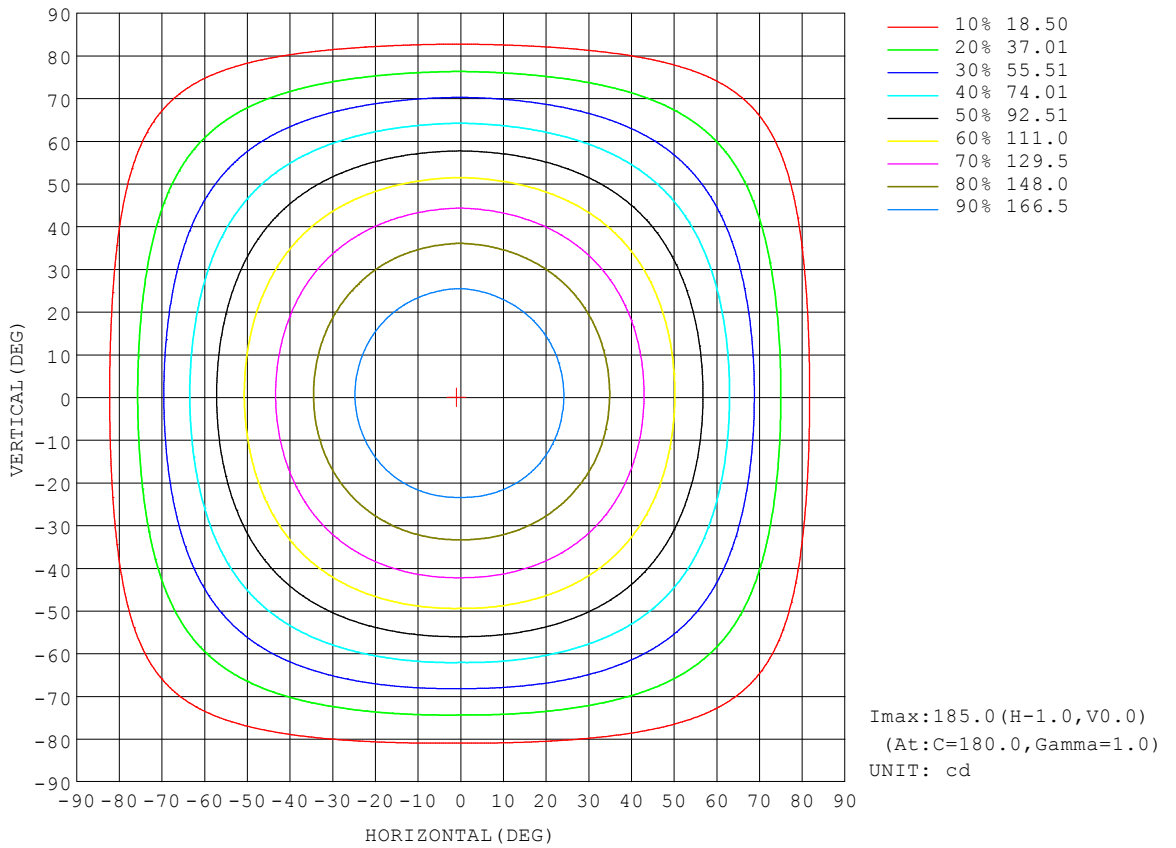


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:

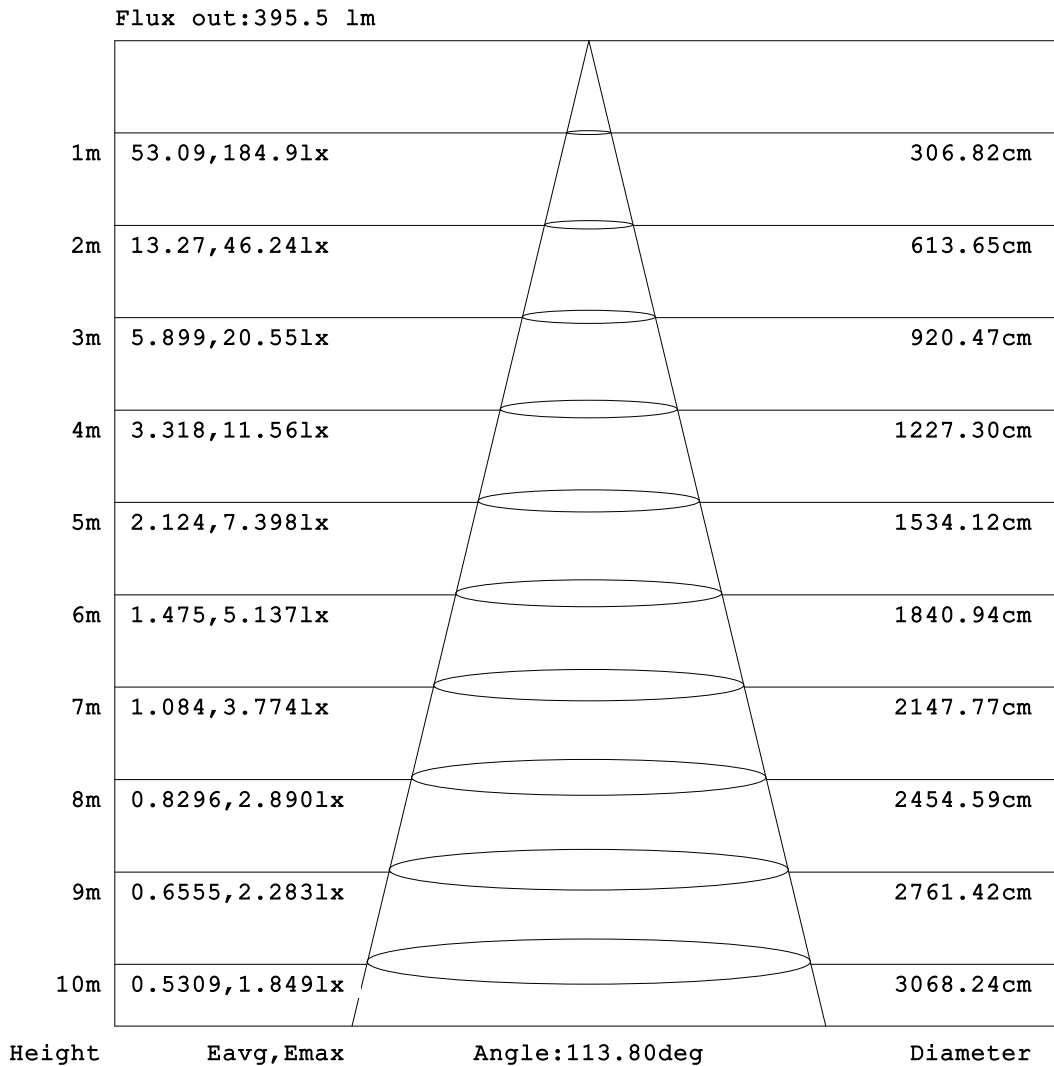


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:

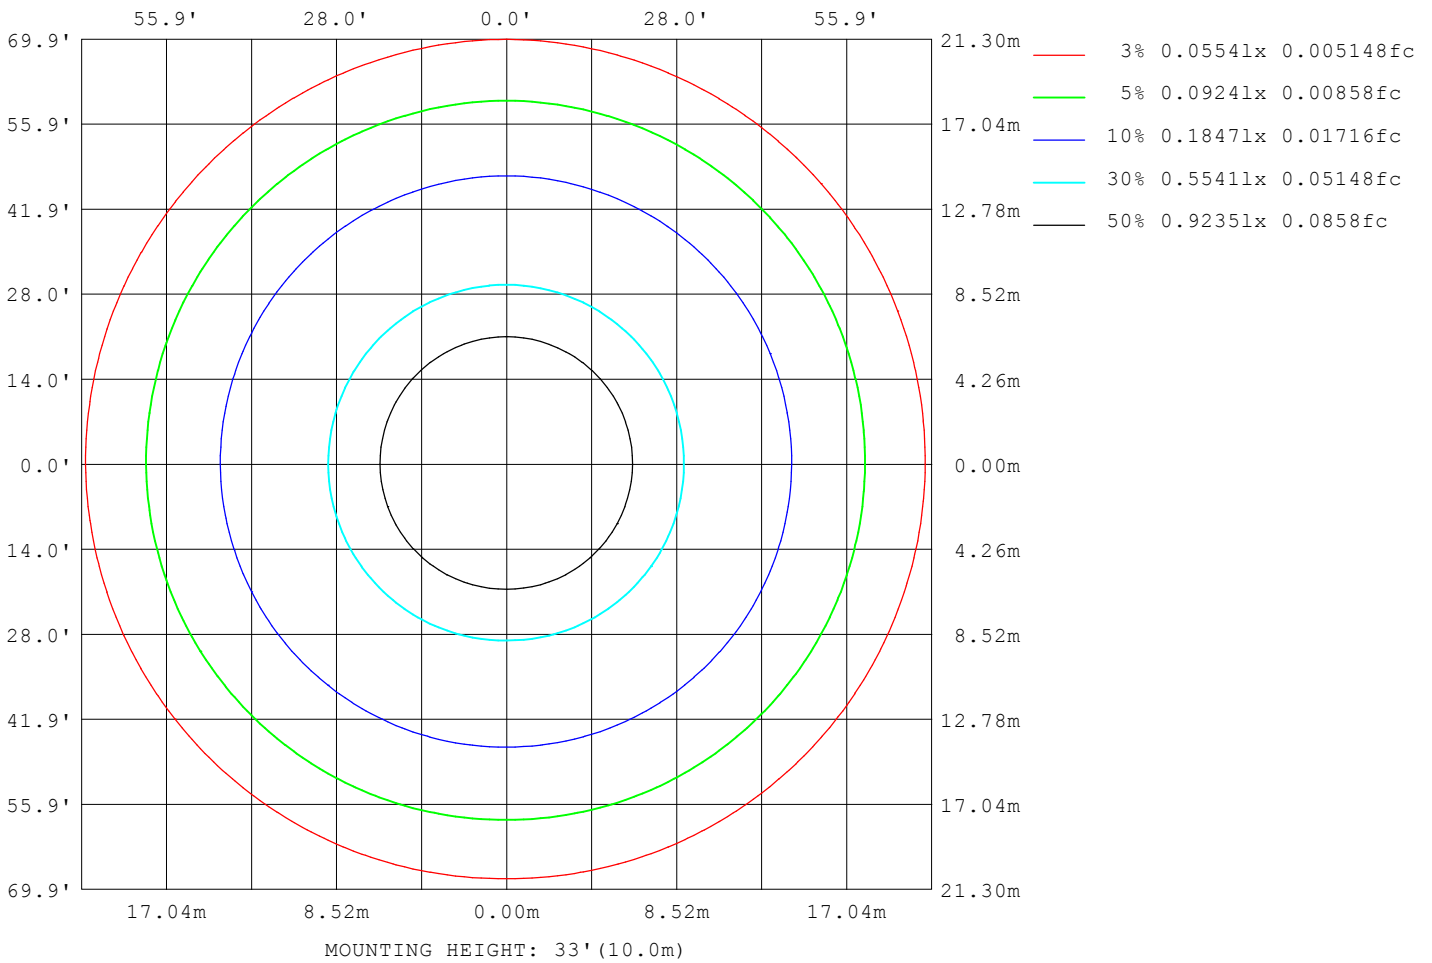

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11359
L_0~180 (75) av	10260
L_0~180 (85) av	8626
L_90~270 (65) av	11359
L_90~270 (75) av	10298
L_90~270 (85) av	7863
L_45 (65) av	11366
L_45 (75) av	10301
L_45 (85) av	8178

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Planar Illuminance Curve

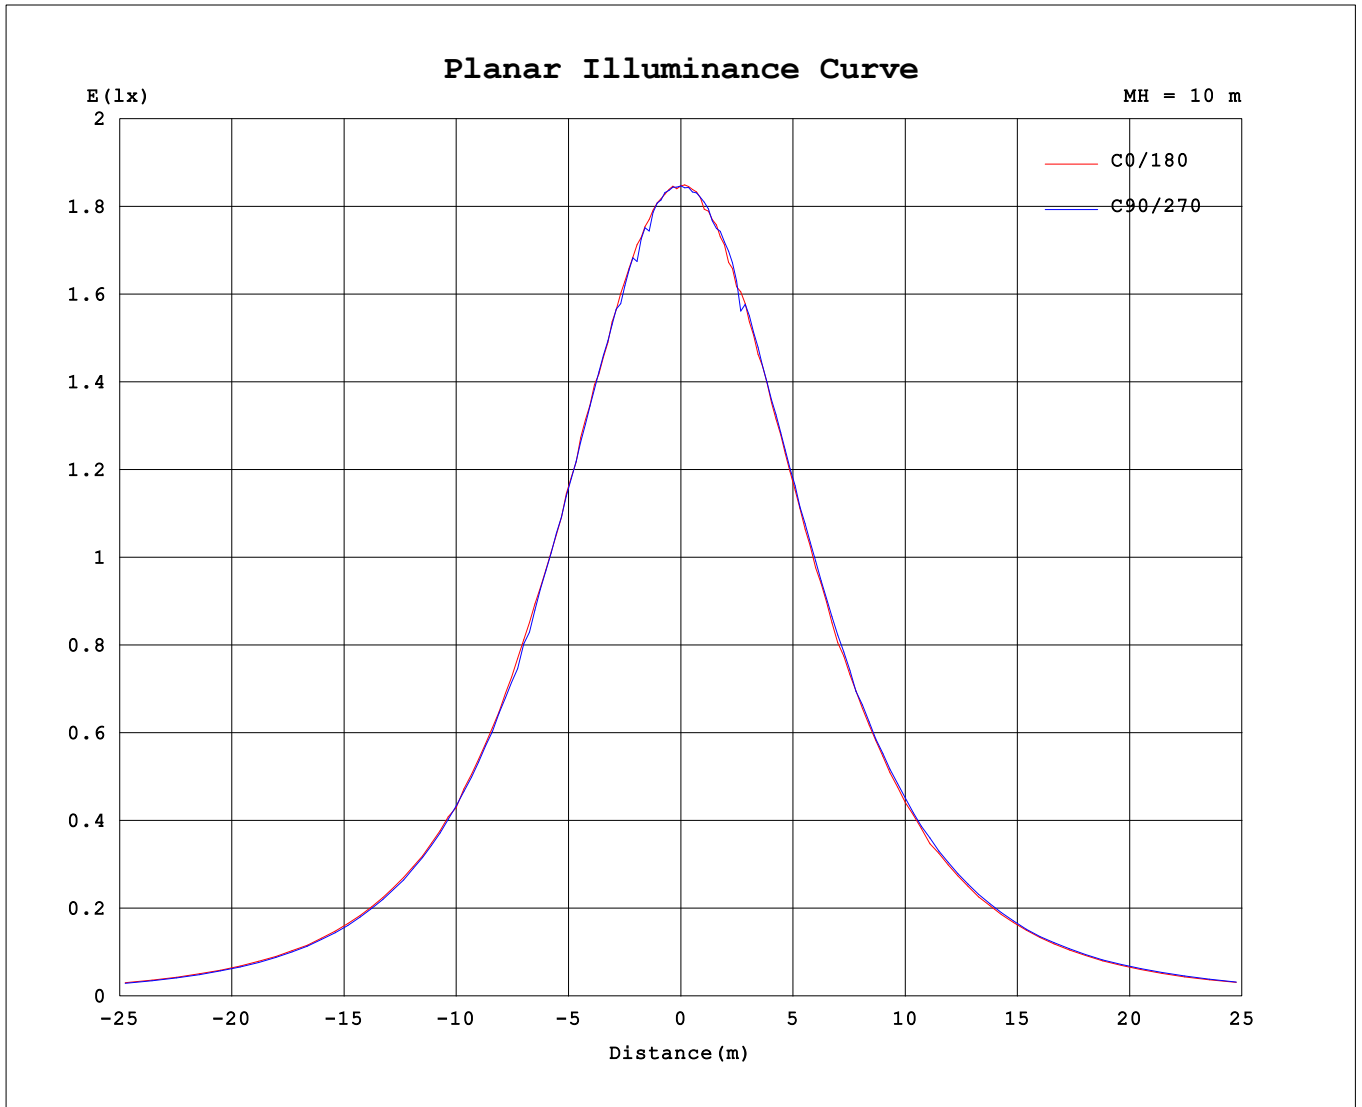

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0657A P:7.5698W PF:0.9606 Freq:59.98Hz Lamp Flux:540.975x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.135	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	185	185	185	185															
5	184	184	184	184															
10	181	181	181	183															
15	178	175	178	173															
20	171	172	173	173															
25	164	164	166	167															
30	156	156	158	159															
35	148	146	147	150															
40	136	134	138	139															
45	122	123	125	128															
50	111	110	113	115															
55	97.8	95.6	99.0	101															
60	83.1	80.8	84.1	86.7															
65	67.9	65.7	69.4	71.6															
70	52.6	50.3	54.2	56.3															
75	36.9	35.3	39.0	40.9															
80	23.3	21.1	24.6	26.2															
85	10.2	8.28	11.3	11.3															
90	0.04	0.07	0.36	0.73															
95	0.00	0.03	0.00	0.00															
100	0.00	0.03	0.02	0.00															
105	0.00	0.04	0.05	0.00															
110	0.01	0.08	0.08	0.02															
115	0.04	0.12	0.12	0.07															
120	0.09	0.15	0.16	0.10															
125	0.12	0.19	0.20	0.14															
130	0.15	0.22	0.24	0.18															
135	0.18	0.25	0.28	0.22															
140	0.20	0.28	0.31	0.25															
145	0.23	0.30	0.34	0.29															
150	0.26	0.32	0.37	0.31															
155	0.29	0.35	0.40	0.35															
160	0.32	0.38	0.43	0.38															
165	0.34	0.42	0.45	0.40															
170	0.39	0.43	0.48	0.41															
175	0.43	0.44	0.51	0.42															
180	0.43	0.44	0.47	0.43															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	184.7	184.7	184.7	184.7
3.0	184.7	184.4	184.7	184.1
6.0	183.8	183.7	182.4	183.9
9.0	182.1	181.8	182.5	181.6
12.0	180.0	179.8	178.8	181.4
15.0	177.8	175.2	178.2	173.3
18.0	173.3	173.7	175.2	175.9
21.0	171.4	170.0	171.9	172.0
24.0	167.1	165.7	167.8	168.4
27.0	162.0	161.1	163.1	164.4
30.0	156.0	155.7	158.0	159.3
33.0	151.6	149.2	152.4	153.7
36.0	145.5	141.1	146.4	148.1
39.0	138.1	137.5	139.9	141.5
42.0	131.6	130.1	133.2	134.9
45.0	121.7	122.7	125.0	127.8
48.0	116.6	114.9	116.0	120.3
51.0	108.9	106.4	110.3	112.2
54.0	100.5	98.61	101.8	104.1
57.0	91.77	89.69	93.14	94.51
60.0	83.14	80.80	84.09	86.66
63.0	73.96	71.70	75.56	77.58
66.0	64.90	62.50	66.13	68.55
69.0	54.60	53.35	57.19	59.09
72.0	46.43	44.19	47.89	49.64
75.0	36.91	35.28	39.04	40.94
78.0	28.77	26.58	30.23	32.02
81.0	20.44	18.37	21.86	23.49
84.0	12.70	10.78	13.69	14.29
87.0	5.475	3.720	6.497	5.504
90.0	0.0400	0.0717	0.3553	0.7321
93.0	0.0056	0.0331	0	0
96.0	0	0.0276	0	0
99.0	0	0.0276	0.0166	0
102.0	0	0.0387	0.0222	0
105.0	0	0.0388	0.0498	0
108.0	0	0.0719	0.0665	0.0055
111.0	0.0165	0.0830	0.0994	0.0385
114.0	0.0441	0.1215	0.1216	0.0606
117.0	0.0662	0.1327	0.1492	0.0828
120.0	0.0883	0.1548	0.1604	0.1049
123.0	0.1049	0.1768	0.1935	0.1270
126.0	0.1270	0.1989	0.2156	0.1491
129.0	0.1490	0.2155	0.2322	0.1767
132.0	0.1657	0.2376	0.2543	0.2043
135.0	0.1812	0.2541	0.2764	0.2209
138.0	0.1945	0.2707	0.2985	0.2430
141.0	0.2154	0.2845	0.3205	0.2651
144.0	0.2320	0.2983	0.3371	0.2871
147.0	0.2431	0.3149	0.3538	0.3037
150.0	0.2596	0.3205	0.3703	0.3149
153.0	0.2719	0.3426	0.3860	0.3369
156.0	0.2917	0.3591	0.3998	0.3480
159.0	0.3127	0.3812	0.4200	0.3646
162.0	0.3227	0.4033	0.4311	0.3867
165.0	0.3426	0.4199	0.4520	0.3955
168.0	0.3592	0.4269	0.4654	0.4069
171.0	0.3868	0.4371	0.4976	0.4147
174.0	0.4200	0.4474	0.5104	0.4211
177.0	0.4310	0.4364	0.4697	0.4254
180.0	0.4310	0.4364	0.4697	0.4309

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-03

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks: