
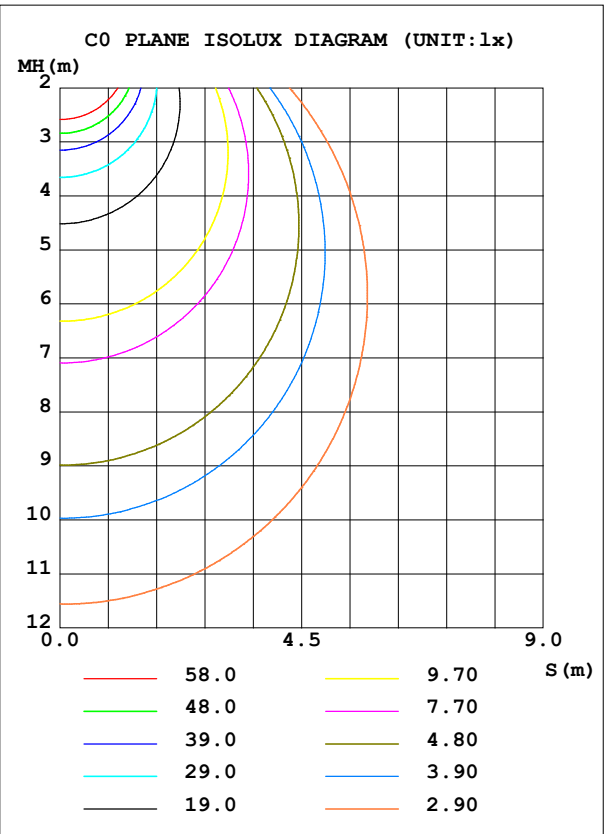


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	BRMF07LAJD4WH_5000K	Imax (cd)	387.6	S/MH (C0/180)	1.25
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1136.4	η UP, DN (C0-180)	0.1,50.8
NOMINAL FLUX (lm)	1136.42	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1,49.0
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	99.8	CIBSE SHR MAX	1.35

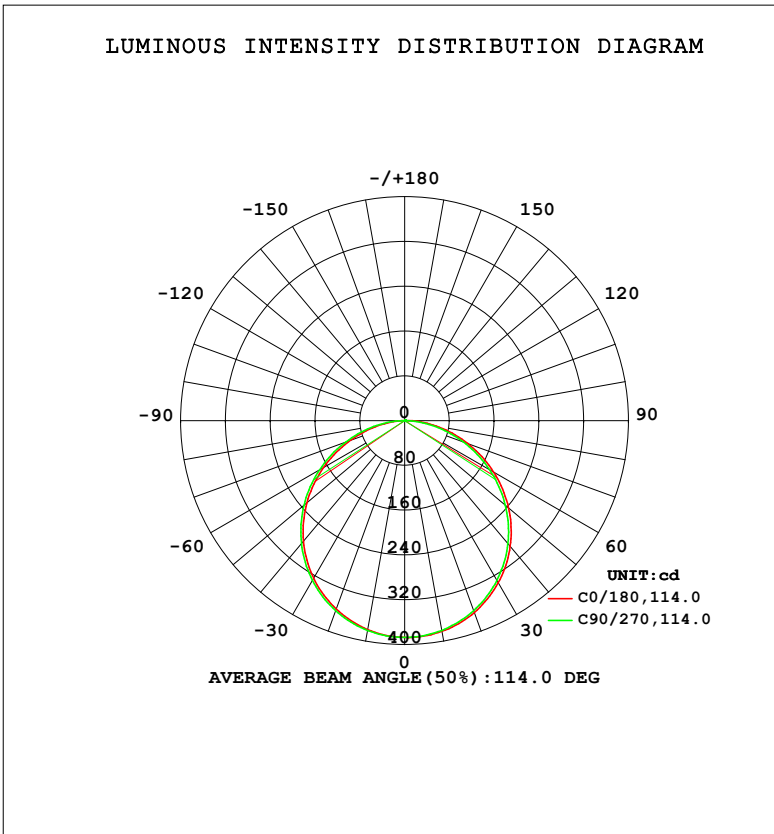

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	382.1	380.7	379.0	380.7					0- 10	36.65	36.65	3.23,3.23
20	364.6	361.0	357.9	361.1					10- 20	105.1	141.8	12.5,12.5
30	334.5	329.7	325.1	329.6					20- 30	159.9	301.7	26.5,26.5
40	293.3	287.1	281.2	286.9					30- 40	193.8	495.4	43.6,43.6
50	242.3	234.8	228.1	235.0					40- 50	202.1	697.6	61.4,61.4
60	183.3	175.1	167.1	175.2					50- 60	183.9	881.5	77.6,77.6
70	120.1	111.5	103.0	112.2					60- 70	142.1	1024	90.1,90.1
80	57.60	49.96	42.13	50.52					70- 80	84.76	1108	97.5,97.5
90	5.054	0.0496	0.0223	0.2575					80- 90	25.24	1134	99.8,99.8
100	0.0442	0.1161	0.1548	0.0772					90-100	0.1630	1134	99.8,99.8
110	0.1765	0.2543	0.3041	0.2375					100-110	0.1764	1134	99.8,99.8
120	0.3203	0.4200	0.4752	0.4033					110-120	0.3198	1134	99.8,99.8
130	0.4584	0.5472	0.6245	0.5635					120-130	0.4277	1135	99.9,99.9
140	0.5855	0.6741	0.7627	0.7072					130-140	0.4777	1135	99.9,99.9
150	0.6850	0.7572	0.8951	0.8343					140-150	0.4625	1136	99.9,99.9
160	0.8065	0.8676	0.9892	0.9393					150-160	0.3908	1136	100,100
170	0.9280	0.9506	1.060	1.022					160-170	0.2680	1136	100,100
180	1.050	1.055	1.066	1.061					170-180	0.0973	1136	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:

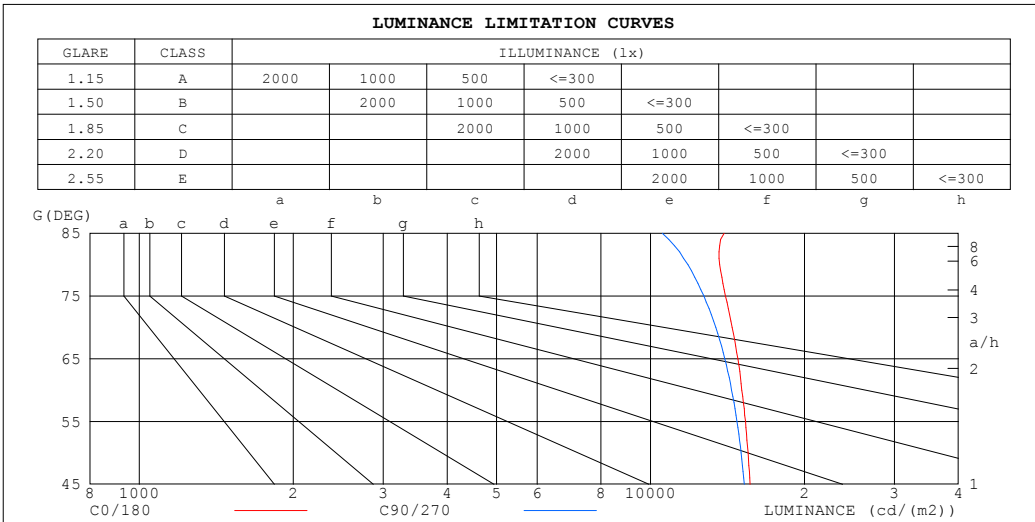

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	13923	10540
80	13651	11838
75	14017	12723
70	14448	13413
65	14821	13968
60	15088	14411
55	15339	14760
50	15513	15031
45	15657	15246


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz		
Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

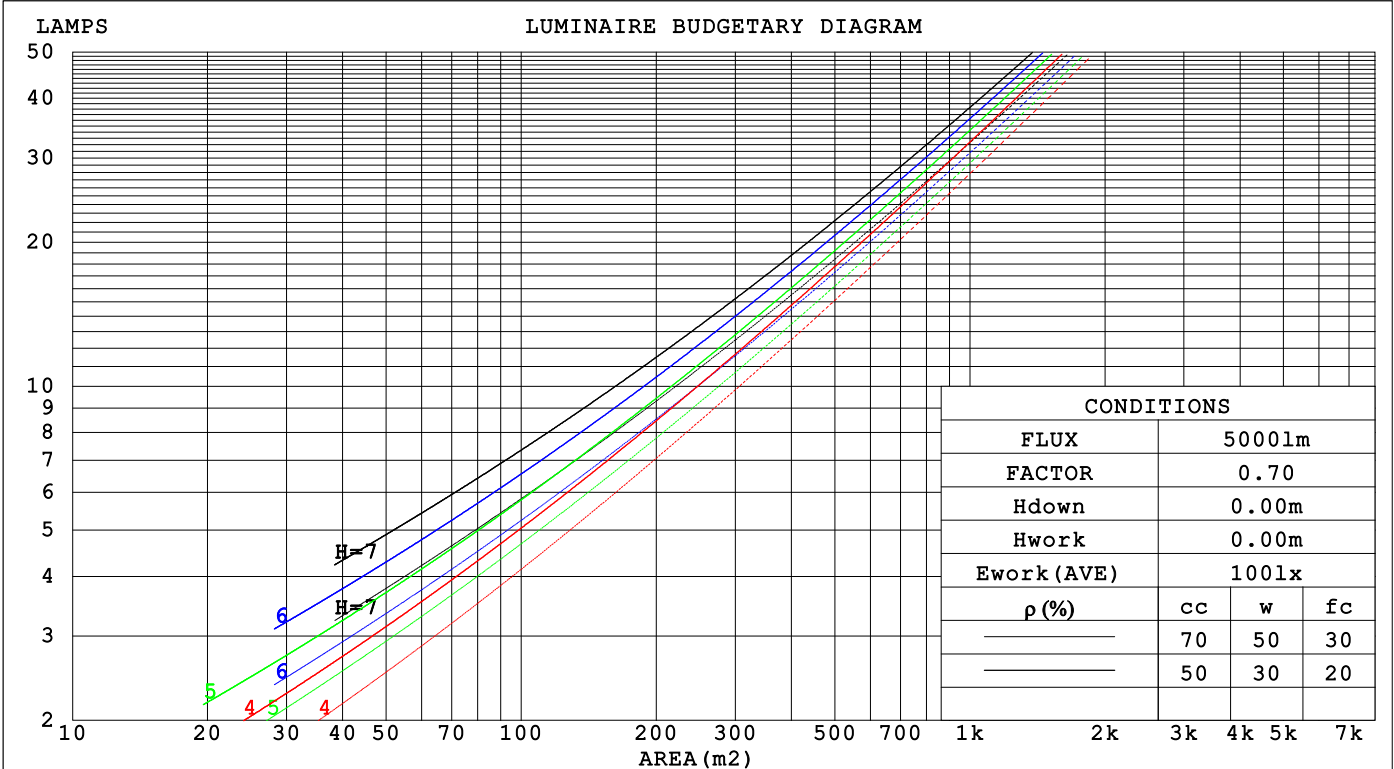

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz		
Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.316	.180	.057	.309	.176	.056	.296	.170	.054	.283	.164	.052	.272	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.155	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.247	.136	.042	.238	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.183	.158	.136	.156	.136	.117	.107	.093	.081	.062	.054	.047	.020	.017	.015	
2.0	.175	.134	.099	.150	.115	.086	.103	.080	.060	.059	.046	.035	.019	.015	.011	
3.0	.167	.116	.076	.143	.100	.066	.098	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.159	.103	.060	.137	.089	.052	.094	.062	.037	.054	.036	.022	.018	.012	.007	
5.0	.152	.093	.049	.130	.080	.042	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.145	.084	.041	.124	.073	.036	.086	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.138	.077	.035	.119	.067	.030	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.131	.072	.030	.113	.062	.027	.078	.044	.019	.046	.026	.011	.015	.008	.004	
9.0	.125	.067	.027	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.103	.054	.021	.071	.038	.015	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz										
Lamp Flux:1136.42x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.: 5000K			
MFR.:			SUR.: 0.176				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.4	24.0	22.7	24.2	24.4	22.3	23.8	22.6	24.0	24.2
3H	24.1	25.5	24.4	25.8	26.0	23.9	25.3	24.2	25.5	25.8
4H	24.8	26.2	25.1	26.4	26.7	24.5	25.9	24.8	26.1	26.4
6H	25.4	26.6	25.7	26.9	27.2	25.0	26.3	25.3	26.5	26.8
8H	25.6	26.8	25.9	27.1	27.4	25.2	26.4	25.5	26.7	27.0
12H	25.7	26.9	26.1	27.2	27.5	25.3	26.4	25.6	26.7	27.1
4H 2H	23.1	24.4	23.4	24.7	24.9	22.9	24.3	23.3	24.5	24.8
3H	24.9	26.1	25.3	26.4	26.7	24.7	25.9	25.1	26.2	26.5
4H	25.7	26.8	26.1	27.2	27.5	25.5	26.6	25.9	26.9	27.2
6H	26.5	27.4	26.9	27.8	28.1	26.1	27.1	26.5	27.4	27.8
8H	26.7	27.6	27.2	28.0	28.4	26.3	27.2	26.8	27.6	28.0
12H	27.0	27.8	27.4	28.2	28.6	26.5	27.3	26.9	27.7	28.1
8H 4H	26.0	26.9	26.5	27.3	27.7	25.8	26.7	26.2	27.1	27.5
6H	26.9	27.7	27.4	28.1	28.5	26.6	27.3	27.0	27.8	28.2
8H	27.3	28.0	27.8	28.4	28.8	26.9	27.6	27.4	28.0	28.5
12H	27.6	28.2	28.1	28.7	29.1	27.2	27.7	27.7	28.2	28.7
12H 4H	26.1	26.9	26.5	27.3	27.7	25.8	26.7	26.3	27.1	27.5
6H	27.0	27.6	27.4	28.1	28.5	26.7	27.4	27.2	27.8	28.2
8H	27.4	28.0	27.9	28.4	28.9	27.1	27.6	27.5	28.1	28.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 1136 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.4)
 Area: 0.0243 m2

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	77	70	83	75	69	61
2.00	94	86	79	93	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:

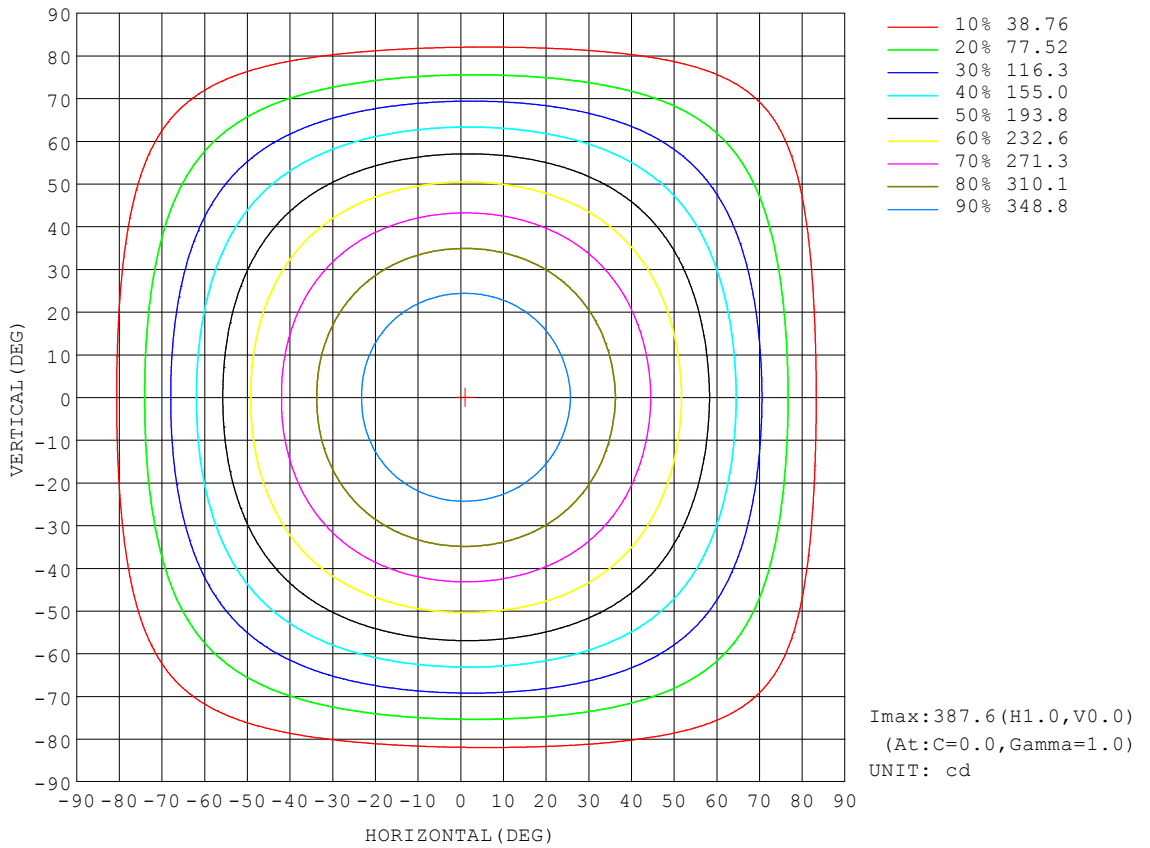


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:

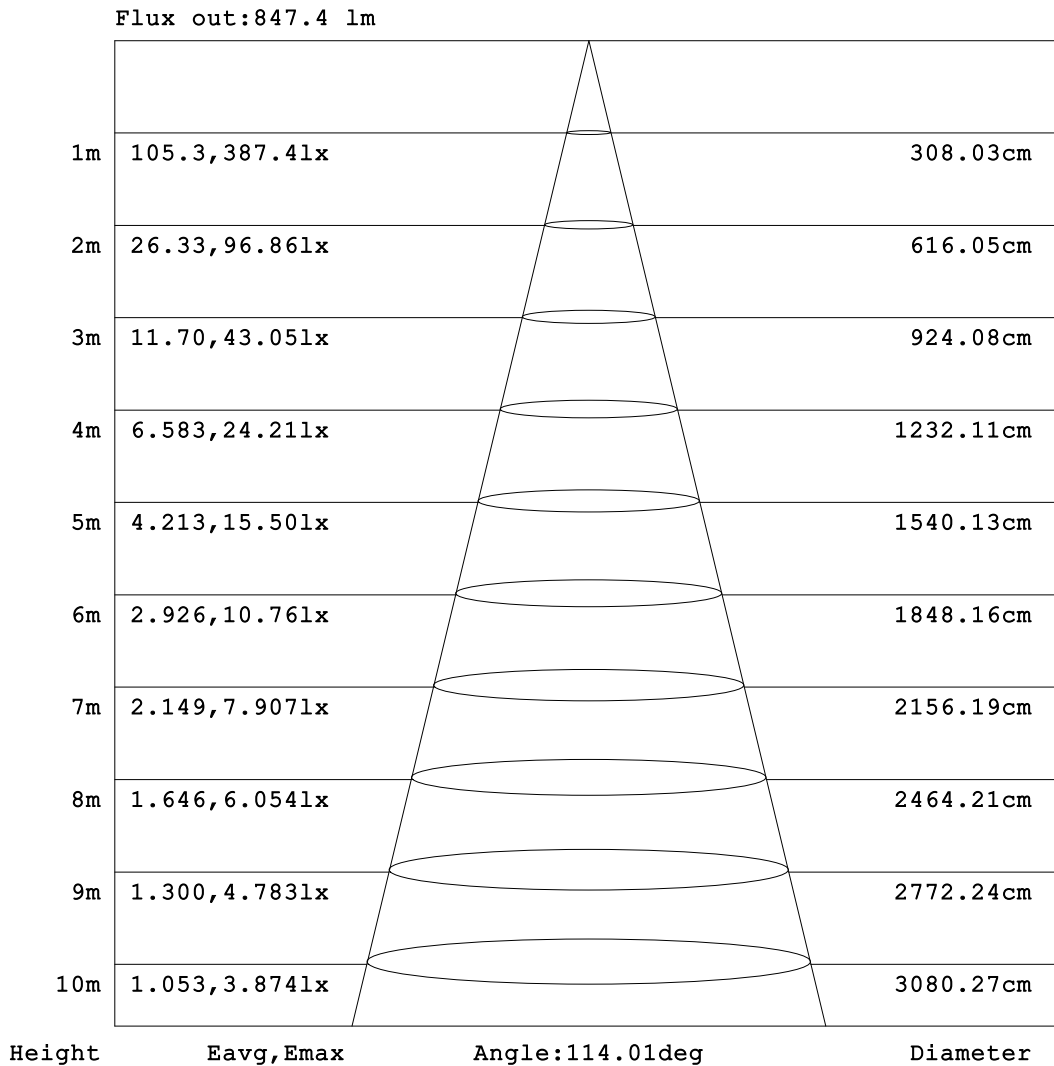


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:

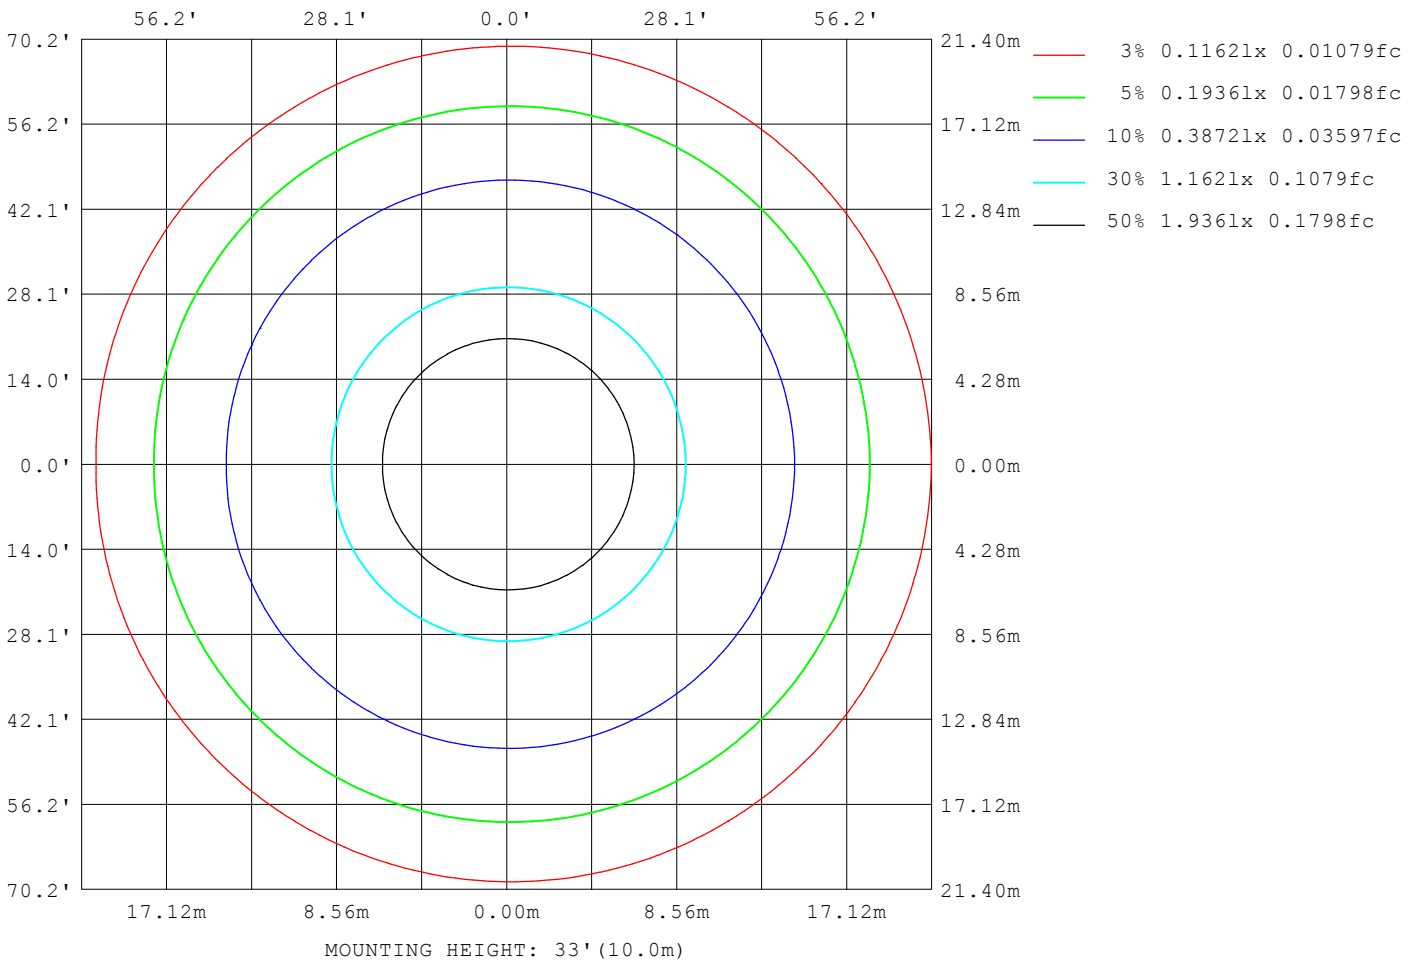

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13990
L_0~180 (75) av	12701
L_0~180 (85) av	10633
L_90~270 (65) av	13998
L_90~270 (75) av	12774
L_90~270 (85) av	10309
L_45 (65) av	13943
L_45 (75) av	12664
L_45 (85) av	10225

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

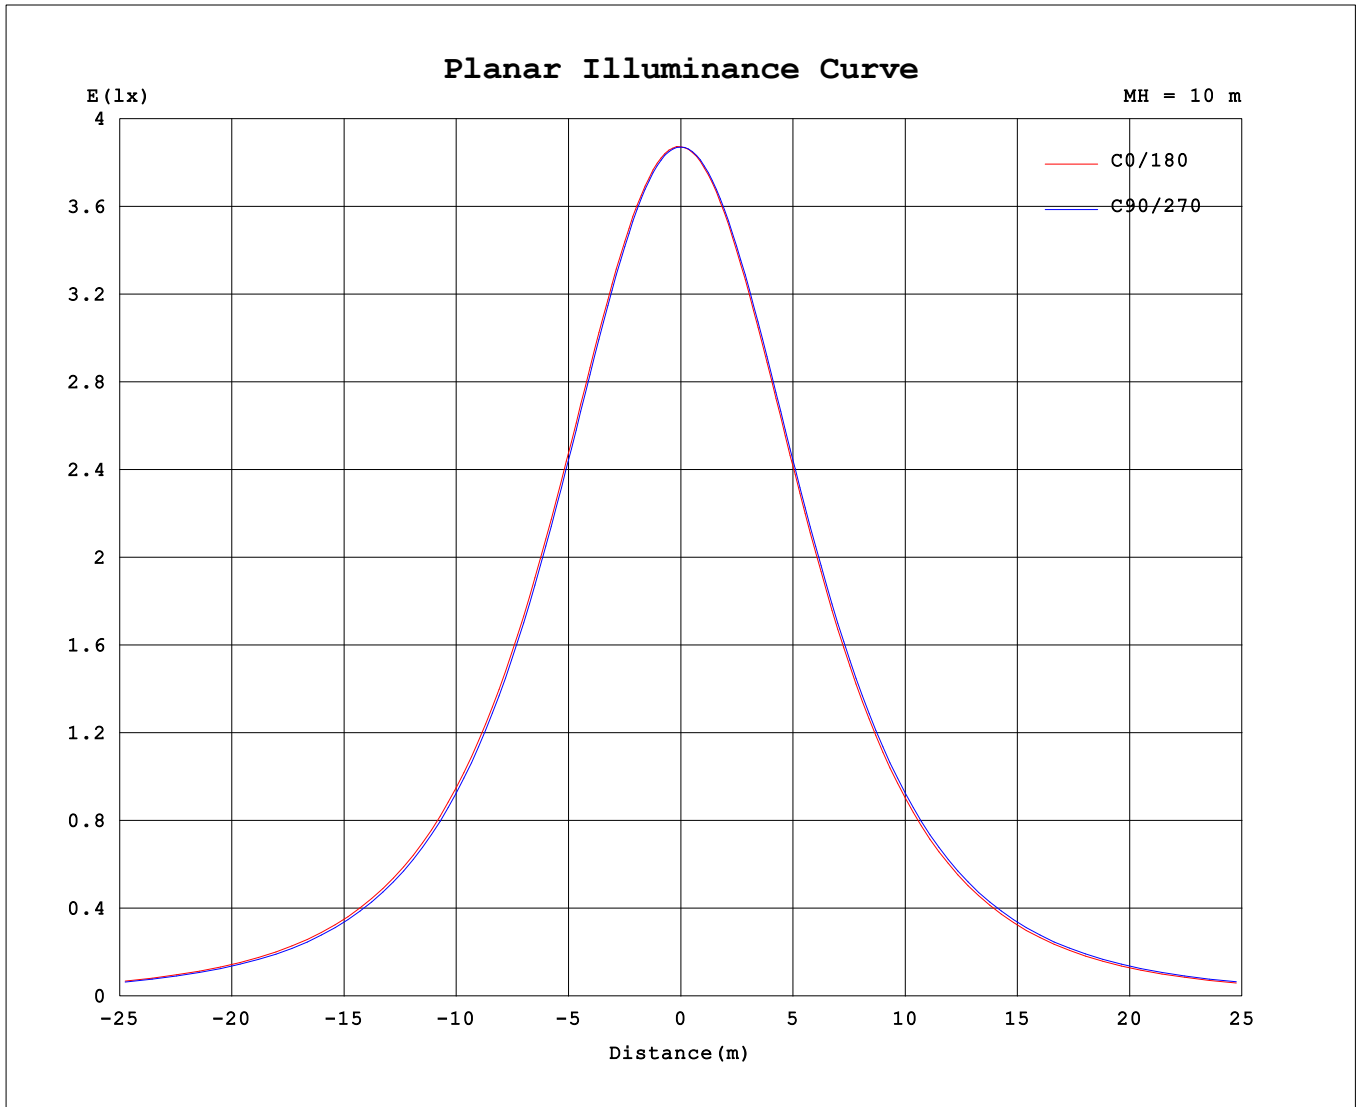

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.1056A P:12.530W PF:0.9886 Freq:59.98Hz Lamp Flux:1136.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 5000K
MFR.:	SUR.: 0.176	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	387	387	387	387															
5	387	386	385	386															
10	382	381	379	381															
15	375	372	370	372															
20	365	361	358	361															
25	351	347	343	347															
30	335	330	325	330															
35	315	310	304	309															
40	293	287	281	287															
45	269	262	256	262															
50	242	235	228	235															
55	214	206	198	206															
60	183	175	167	175															
65	152	143	135	144															
70	120	111	103	112															
75	88.2	80.0	71.6	80.7															
80	57.6	50.0	42.1	50.5															
85	29.5	22.3	15.6	21.3															
90	5.05	0.05	0.02	0.26															
95	0.04	0.05	0.08	0.03															
100	0.04	0.12	0.15	0.08															
105	0.09	0.19	0.22	0.16															
110	0.18	0.25	0.30	0.24															
115	0.24	0.34	0.39	0.33															
120	0.32	0.42	0.48	0.40															
125	0.39	0.49	0.55	0.49															
130	0.46	0.55	0.62	0.56															
135	0.52	0.61	0.70	0.64															
140	0.59	0.67	0.76	0.71															
145	0.63	0.71	0.82	0.78															
150	0.68	0.76	0.90	0.83															
155	0.75	0.81	0.94	0.90															
160	0.81	0.87	0.99	0.94															
165	0.87	0.92	1.04	0.98															
170	0.93	0.95	1.06	1.02															
175	0.99	1.02	1.07	1.06															
180	1.05	1.06	1.07	1.06															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	387.1	387.1	387.1	387.1
3.0	387.3	386.7	386.2	386.6
6.0	386.1	384.9	383.8	384.8
9.0	383.3	381.8	380.5	381.8
12.0	379.9	377.7	375.8	377.7
15.0	375.1	372.4	370.0	372.3
18.0	369.1	366.0	363.2	366.0
21.0	362.2	358.4	355.2	358.5
24.0	354.0	349.9	346.3	349.8
27.0	344.8	340.3	336.3	340.2
30.0	334.5	329.7	325.1	329.6
33.0	323.4	317.9	313.1	317.8
36.0	311.1	305.4	300.1	305.2
39.0	297.9	291.8	286.0	291.7
42.0	283.9	277.3	271.3	277.2
45.0	269.0	262.0	255.6	262.0
48.0	253.1	246.0	239.0	245.9
51.0	236.8	229.2	222.1	229.2
54.0	219.5	211.7	204.3	211.8
57.0	201.8	193.7	185.9	193.8
60.0	183.3	175.1	167.1	175.2
63.0	164.8	156.1	148.1	156.8
66.0	145.7	137.1	128.7	137.7
69.0	126.6	117.9	109.4	118.5
72.0	107.2	98.72	90.30	99.50
75.0	88.15	80.02	71.60	80.66
78.0	69.65	61.66	53.62	62.33
81.0	51.77	44.12	36.56	44.71
84.0	34.84	27.59	20.52	26.88
87.0	19.17	12.38	6.366	10.92
90.0	5.054	0.0496	0.0223	0.2575
93.0	0.0498	0.0442	0.0609	0.0276
96.0	0.0442	0.0609	0.0886	0.0331
99.0	0.0442	0.0941	0.1274	0.0606
102.0	0.0552	0.1328	0.1770	0.1104
105.0	0.0939	0.1880	0.2213	0.1601
108.0	0.1381	0.2267	0.2764	0.2098
111.0	0.1932	0.2654	0.3261	0.2540
114.0	0.2264	0.3207	0.3759	0.3038
117.0	0.2760	0.3703	0.4146	0.3536
120.0	0.3203	0.4200	0.4752	0.4033
123.0	0.3645	0.4587	0.5249	0.4584
126.0	0.4087	0.4865	0.5691	0.5027
129.0	0.4474	0.5361	0.6134	0.5524
132.0	0.4806	0.5748	0.6631	0.5966
135.0	0.5247	0.6134	0.6964	0.6408
138.0	0.5634	0.6465	0.7404	0.6796
141.0	0.5911	0.6742	0.7846	0.7237
144.0	0.6296	0.7018	0.8177	0.7624
147.0	0.6573	0.7349	0.8619	0.8066
150.0	0.6850	0.7572	0.8951	0.8343
153.0	0.7237	0.7847	0.9228	0.8674
156.0	0.7623	0.8124	0.9504	0.9006
159.0	0.8009	0.8456	0.9889	0.9337
162.0	0.8340	0.8732	1.022	0.9613
165.0	0.8672	0.9172	1.039	0.9835
168.0	0.9004	0.9395	1.058	1.006
171.0	0.9391	0.9781	1.061	1.028
174.0	0.9832	1.006	1.065	1.050
177.0	1.005	1.044	1.066	1.055
180.0	1.050	1.055	1.066	1.061

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks: