


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 88.76 lm/W
MODEL	BRMF12LAJD4WH_2700K	I _{max} (cd)	711.2	S/MH(C0/180)	1.32	
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.26	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2085.5	η UP,DN(C0-180)	0.1,47.0	
NOMINAL FLUX(lm)	2085.53	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,52.6	
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	120	η down (%)	99.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

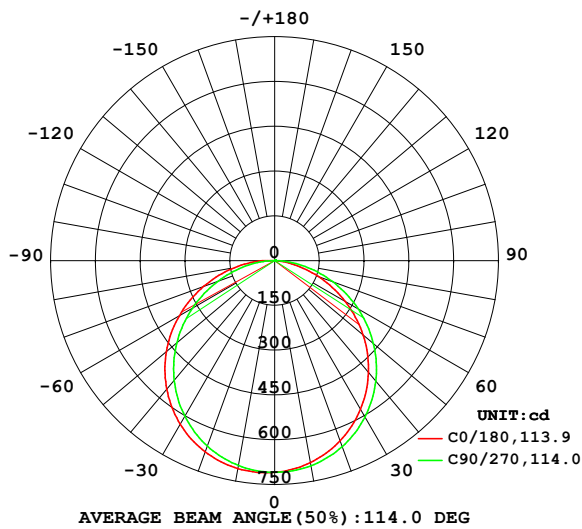

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

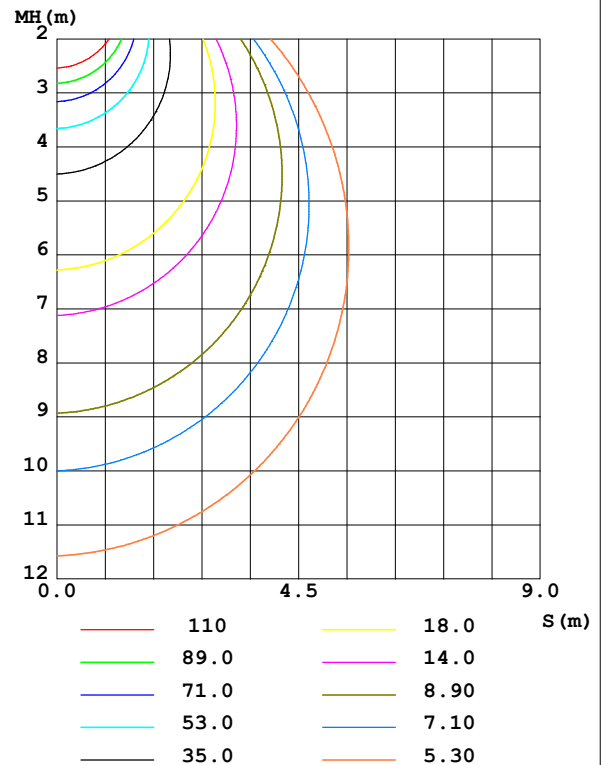

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	687.1	697.9	707.3	696.6					0- 10	67.12	67.12	3.22,3.22
20	642.0	662.6	681.4	660.3					10- 20	192.6	259.7	12.5,12.5
30	575.2	605.3	632.5	602.0					20- 30	292.8	552.5	26.5,26.5
40	489.3	527.3	562.3	523.4					30- 40	354.7	907.2	43.5,43.5
50	387.0	432.1	473.6	427.7					40- 50	370.0	1277	61.2,61.2
60	272.8	322.9	368.6	318.0					50- 60	336.6	1614	77.4,77.4
70	155.6	206.4	253.2	201.8					60- 70	259.9	1874	89.8,89.8
80	48.61	93.46	136.3	89.62					70- 80	155.3	2029	97.3,97.3
90	0.2575	0.9391	33.05	0.2902					80- 90	49.41	2078	99.7,99.7
100	0.3365	0.2657	0.2651	0.3039					90-100	2.001	2080	99.8,99.8
110	0.6014	0.5311	0.4805	0.5527					100-110	0.4315	2081	99.8,99.8
120	0.8497	0.7855	0.7565	0.8402					110-120	0.6652	2081	99.8,99.8
130	1.060	1.023	1.044	1.122					120-130	0.8400	2082	99.8,99.8
140	1.253	1.233	1.303	1.371					130-140	0.9111	2083	99.9,99.9
150	1.424	1.416	1.546	1.581					140-150	0.8723	2084	99.9,99.9
160	1.623	1.604	1.756	1.747					150-160	0.7345	2085	100,100
170	1.783	1.781	1.921	1.913					160-170	0.4988	2085	100,100
180	1.965	1.952	1.976	1.963					170-180	0.1805	2086	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:

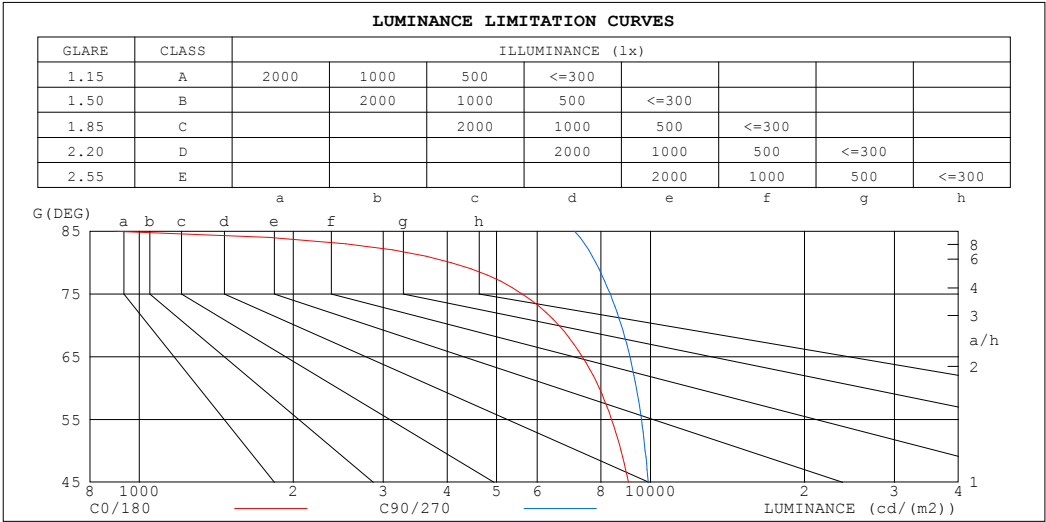

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	898	7107
80	4073	7816
75	5611	8345
70	6617	8765
65	7360	9113
60	7938	9380
55	8392	9599
50	8759	9762
45	9046	9892


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz		
Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.53	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.37	.30	.25	.36	.30	.25	.23

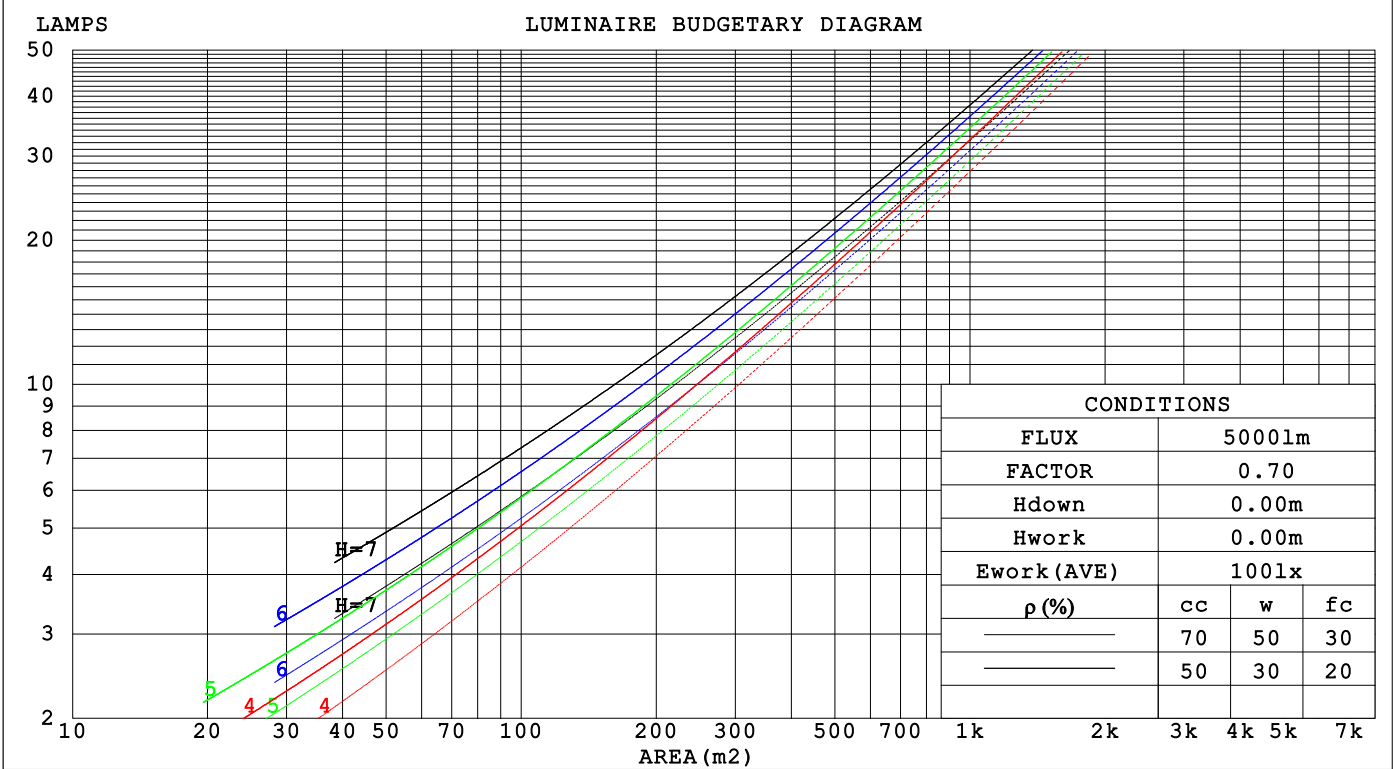

C Range: 0 - 360DEG

C Interval: 90.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2025-12-05

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454

Humidity:65.0%

Test Distance:8.800m [K=1.0000]

Remarks:

WEC AND CCEC

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.318	.181	.057	.311	.177	.056	.297	.170	.054	.285	.164	.053	.273	.158	.051															
2.0	.297	.163	.050	.290	.160	.049	.279	.155	.048	.268	.150	.047	.257	.146	.046															
3.0	.274	.146	.044	.268	.144	.043	.257	.140	.042	.248	.136	.042	.239	.132	.041															
4.0	.252	.131	.038	.247	.129	.038	.238	.126	.038	.229	.123	.037	.221	.120	.037															
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033															
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030															
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027															
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025															
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023															
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.183	.159	.136	.157	.136	.117	.107	.094	.081	.062	.054	.047	.020	.017	.015	
2.0	.176	.135	.100	.150	.116	.086	.103	.080	.060	.059	.047	.035	.019	.015	.012	
3.0	.168	.117	.076	.144	.101	.066	.099	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.160	.104	.061	.137	.090	.053	.095	.062	.037	.055	.037	.022	.018	.012	.007	
5.0	.153	.093	.050	.131	.081	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.146	.085	.042	.125	.074	.036	.086	.052	.026	.050	.030	.015	.016	.010	.005	
7.0	.139	.078	.036	.119	.068	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.031	.114	.063	.027	.079	.044	.019	.046	.026	.012	.015	.009	.004	
9.0	.126	.067	.028	.109	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.104	.055	.022	.072	.039	.016	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.: 2700K				
MFR.:			SUR.: 0.296			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.0	21.5	20.2	21.7	21.9	20.6	22.1	20.8	22.3	22.5
3H	21.3	22.7	21.6	22.9	23.2	22.1	23.5	22.4	23.8	24.0
4H	21.7	23.1	22.0	23.3	23.6	22.8	24.1	23.1	24.4	24.7
6H	21.9	23.2	22.3	23.5	23.8	23.3	24.6	23.6	24.8	25.1
8H	22.0	23.2	22.3	23.5	23.8	23.5	24.7	23.8	25.0	25.3
12H	21.9	23.1	22.3	23.4	23.7	23.6	24.8	23.9	25.1	25.4
4H 2H	20.6	22.0	20.9	22.2	22.5	21.1	22.4	21.4	22.7	22.9
3H	22.1	23.3	22.5	23.6	23.9	22.8	24.0	23.2	24.3	24.6
4H	22.7	23.7	23.0	24.1	24.4	23.6	24.7	24.0	25.0	25.4
6H	23.0	24.0	23.4	24.3	24.7	24.2	25.2	24.6	25.6	25.9
8H	23.1	24.0	23.5	24.3	24.7	24.5	25.4	24.9	25.7	26.1
12H	23.0	23.9	23.5	24.3	24.7	24.6	25.5	25.1	25.8	26.3
8H 4H	23.0	23.9	23.4	24.2	24.6	23.8	24.7	24.2	25.1	25.5
6H	23.4	24.2	23.9	24.6	25.0	24.6	25.3	25.0	25.7	26.2
8H	23.5	24.2	24.0	24.6	25.1	24.9	25.5	25.3	26.0	26.4
12H	23.5	24.1	24.0	24.6	25.1	25.1	25.7	25.6	26.1	26.6
12H 4H	23.0	23.8	23.4	24.2	24.6	23.8	24.6	24.2	25.0	25.4
6H	23.5	24.2	24.0	24.6	25.0	24.6	25.3	25.1	25.7	26.1
8H	23.6	24.2	24.1	24.7	25.1	24.9	25.5	25.4	26.0	26.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 2086 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.6$)
Area: 0.0688 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	64	81	71	64	78	70	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	97	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:

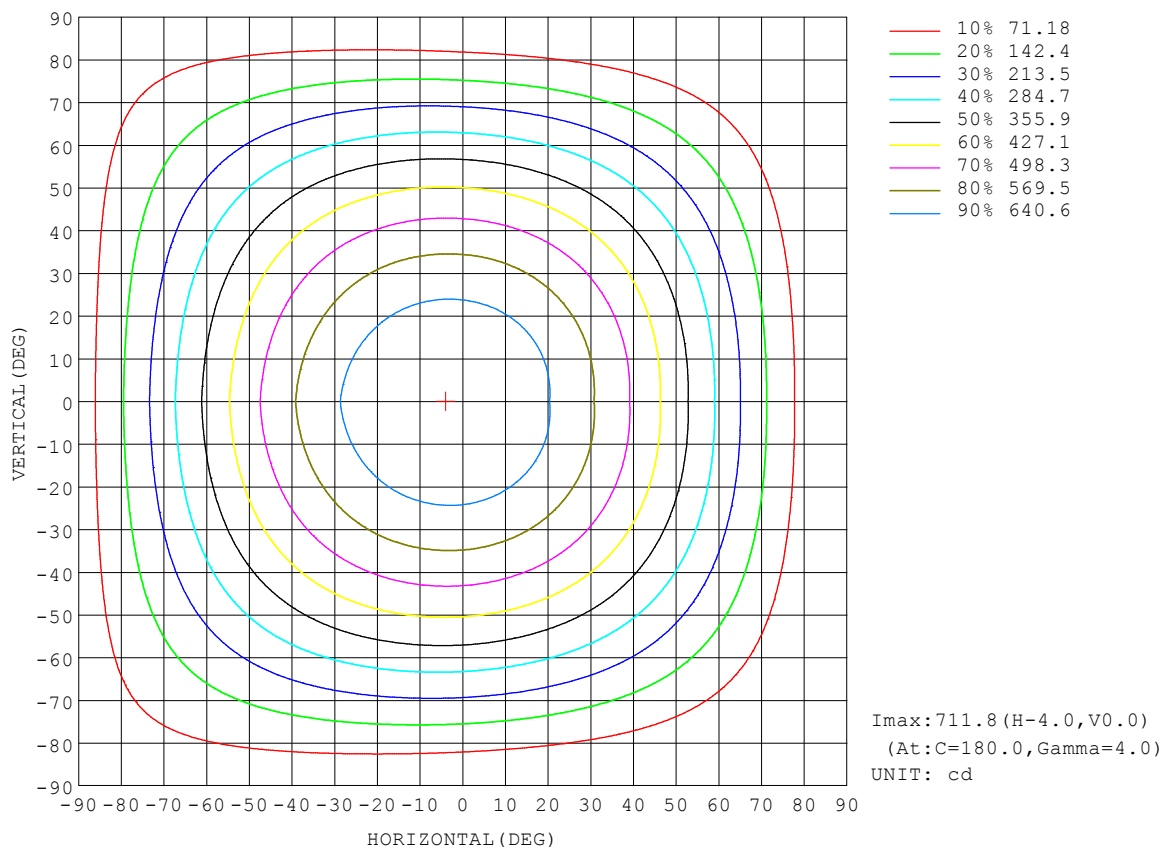


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:

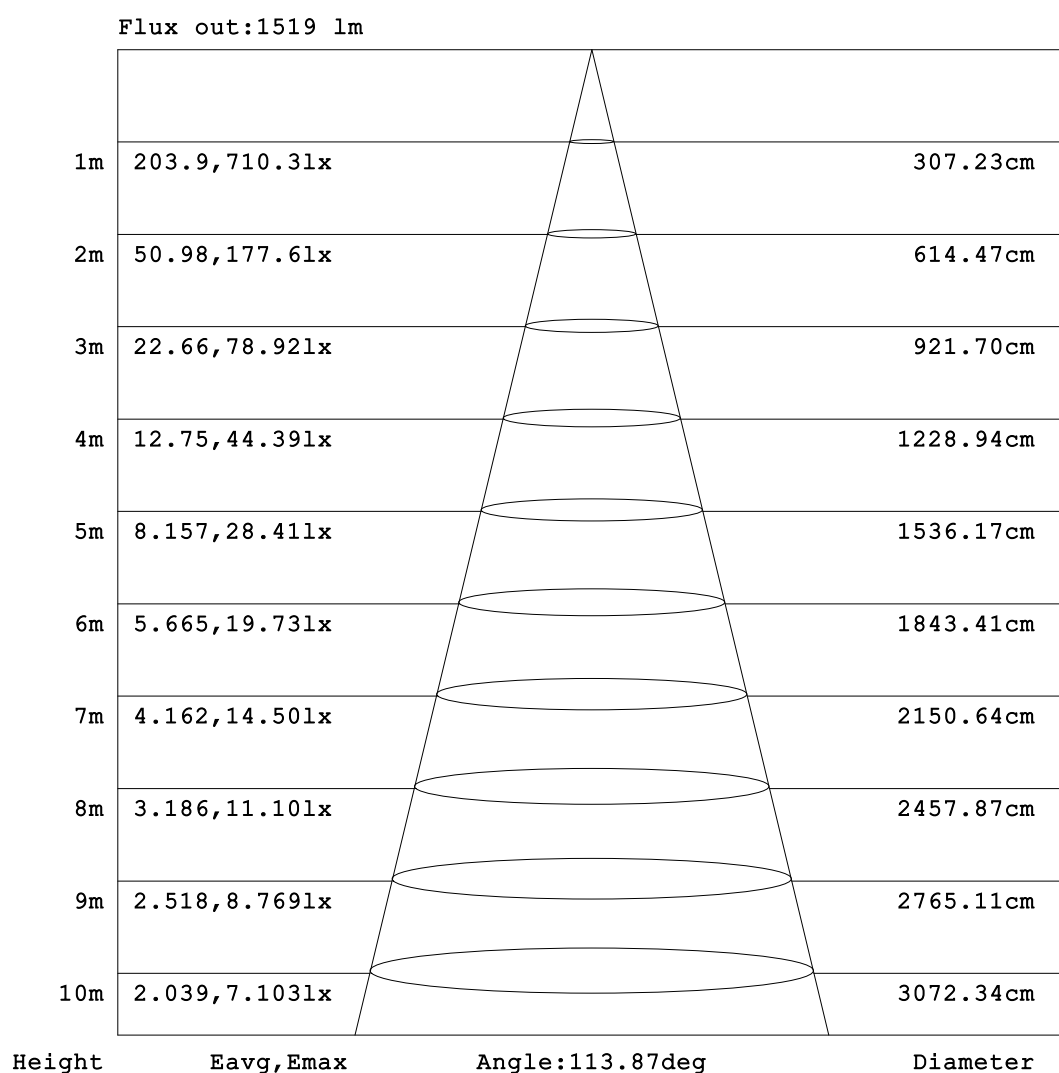


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:

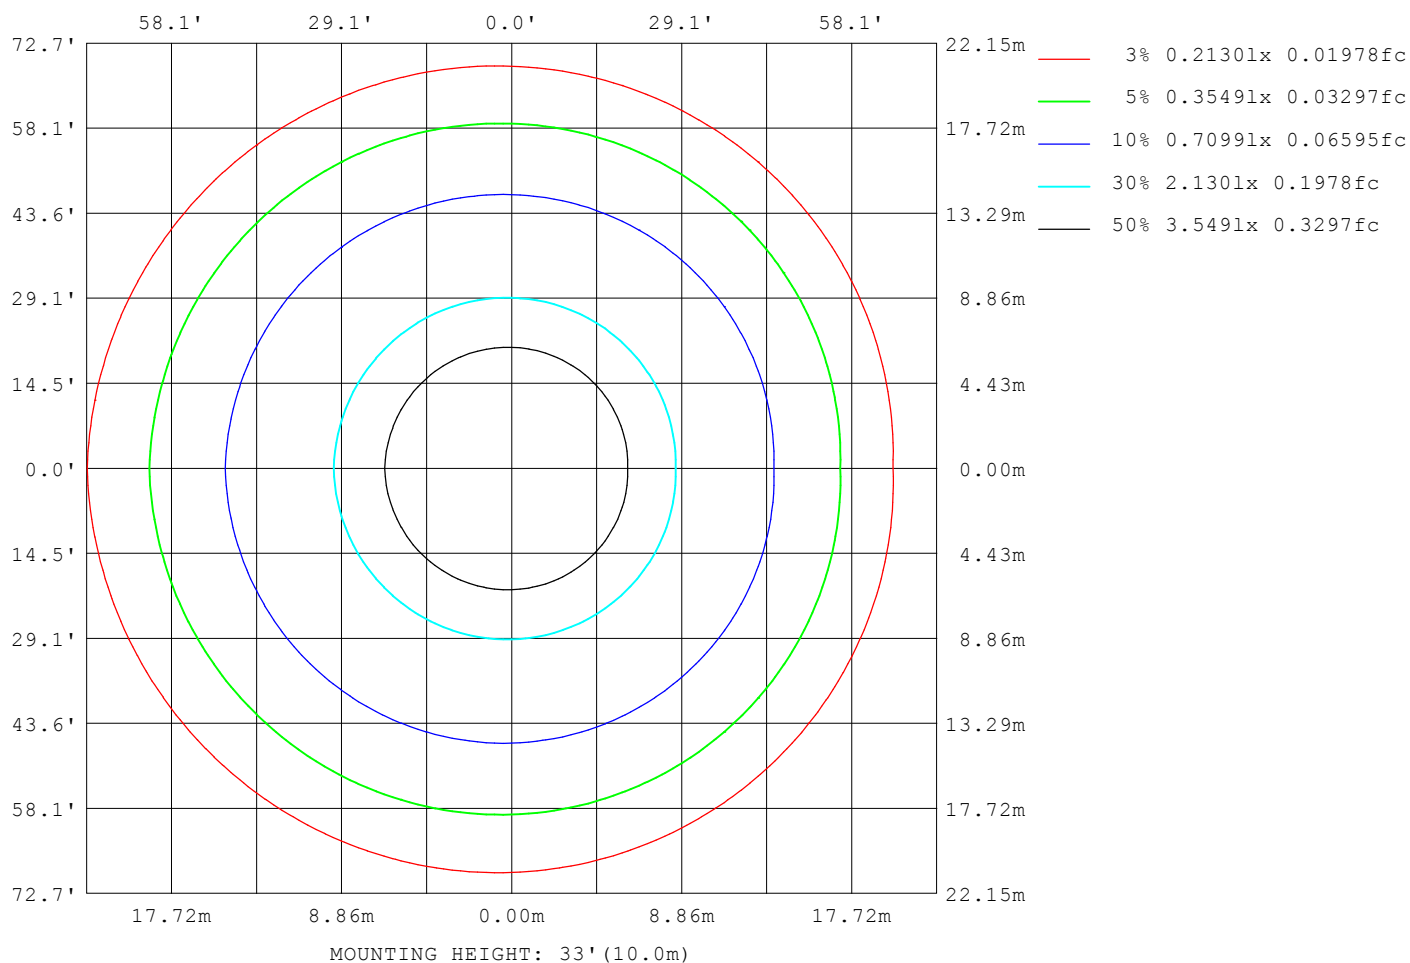

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9037
L_0~180 (75) av	8255
L_0~180 (85) av	7279
L_90~270 (65) av	9033
L_90~270 (75) av	8231
L_90~270 (85) av	6858
L_45 (65) av	9140
L_45 (75) av	8406
L_45 (85) av	7415

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

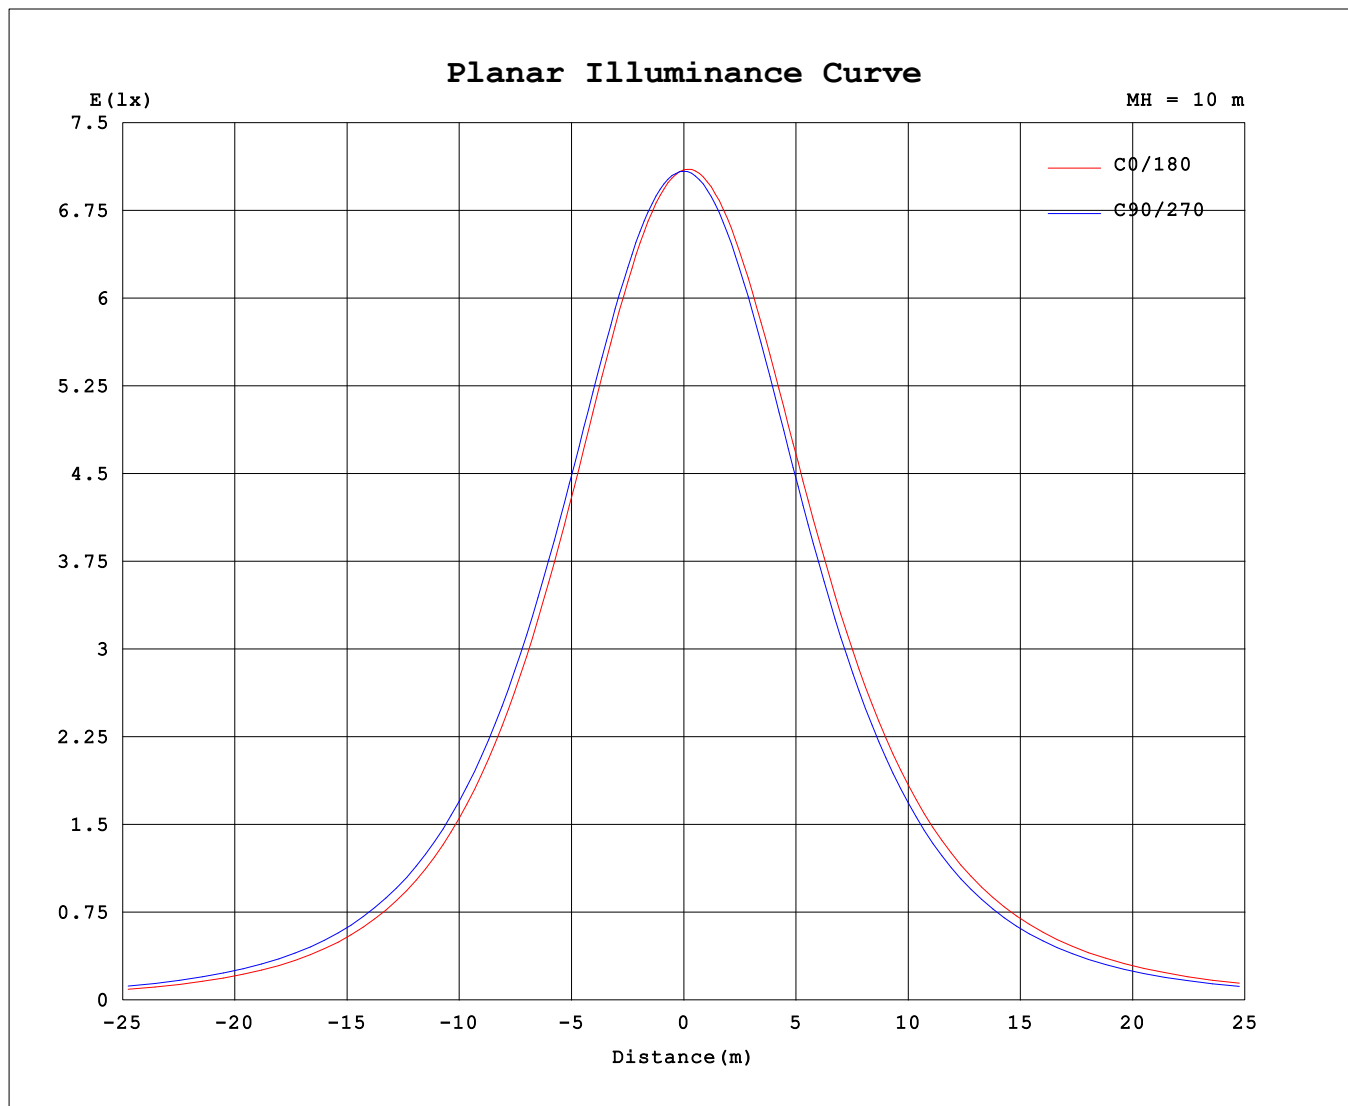

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.04V I:0.1990A P:23.496W PF:0.9836 Freq:59.98Hz Lamp Flux:2085.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 2700K
MFR.:	SUR.: 0.296	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	709	709	709	709														
5	701	706	711	706														
10	687	698	707	697														
15	667	683	697	681														
20	642	663	681	660														
25	611	637	660	634														
30	575	605	633	602														
35	534	569	600	565														
40	489	527	562	523														
45	440	482	520	478														
50	387	432	474	428														
55	331	379	423	374														
60	273	323	369	318														
65	214	265	312	260														
70	156	206	253	202														
75	99.8	149	194	144														
80	48.6	93.5	136	89.6														
85	5.38	42.7	81.9	39.6														
90	0.26	0.94	33.0	0.29														
95	0.26	0.17	0.21	0.24														
100	0.34	0.27	0.27	0.30														
105	0.47	0.39	0.35	0.41														
110	0.60	0.53	0.48	0.55														
115	0.73	0.65	0.62	0.69														
120	0.85	0.79	0.76	0.84														
125	0.97	0.91	0.90	0.99														
130	1.06	1.02	1.04	1.12														
135	1.16	1.13	1.19	1.25														
140	1.25	1.23	1.30	1.37														
145	1.34	1.32	1.43	1.48														
150	1.42	1.42	1.55	1.58														
155	1.53	1.52	1.66	1.69														
160	1.62	1.60	1.76	1.75														
165	1.71	1.70	1.84	1.83														
170	1.78	1.78	1.92	1.91														
175	1.86	1.86	1.97	1.96														
180	1.97	1.95	1.98	1.96														

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	709.2	709.2	709.2	709.2
3.0	705.0	708.4	711.2	708.1
6.0	698.9	705.3	710.5	704.6
9.0	690.4	699.9	708.5	699.0
12.0	679.8	692.8	704.0	691.2
15.0	667.2	682.9	697.3	681.4
18.0	652.9	671.7	688.2	669.8
21.0	636.3	658.0	677.5	655.7
24.0	617.4	642.5	664.6	639.6
27.0	597.3	624.5	649.8	621.6
30.0	575.2	605.3	632.5	602.0
33.0	551.1	583.8	613.8	580.4
36.0	525.7	560.6	593.0	557.1
39.0	498.8	536.0	570.2	532.1
42.0	469.8	509.4	545.9	505.8
45.0	439.7	481.6	520.2	477.7
48.0	408.5	452.7	492.7	447.9
51.0	376.2	421.8	463.7	417.1
54.0	342.2	389.9	433.3	385.3
57.0	307.8	357.1	401.4	352.1
60.0	272.8	322.9	368.6	318.0
63.0	237.4	288.3	334.8	283.5
66.0	201.9	253.5	300.1	248.4
69.0	167.0	218.2	265.0	213.3
72.0	132.8	183.0	229.5	178.6
75.0	99.82	148.7	194.2	144.4
78.0	68.56	115.0	159.3	111.1
81.0	39.17	82.81	125.2	79.43
84.0	12.87	52.44	92.47	49.13
87.0	0.2544	24.38	61.66	21.33
90.0	0.2575	0.9391	33.05	0.2902
93.0	0.2606	0.1438	7.518	0.2269
96.0	0.2637	0.1772	0.2099	0.2433
99.0	0.3143	0.2435	0.2431	0.2708
102.0	0.3861	0.3209	0.2928	0.3371
105.0	0.4689	0.3929	0.3480	0.4146
108.0	0.5407	0.4758	0.4200	0.4864
111.0	0.6181	0.5587	0.5026	0.5749
114.0	0.7008	0.6196	0.5856	0.6689
117.0	0.7780	0.7026	0.6683	0.7518
120.0	0.8497	0.7855	0.7565	0.8402
123.0	0.9216	0.8629	0.8394	0.9287
126.0	0.9879	0.9403	0.9333	1.006
129.0	1.049	1.007	1.016	1.095
132.0	1.104	1.062	1.104	1.178
135.0	1.159	1.134	1.187	1.250
138.0	1.209	1.200	1.259	1.321
141.0	1.269	1.250	1.336	1.388
144.0	1.330	1.311	1.408	1.460
147.0	1.374	1.366	1.474	1.515
150.0	1.424	1.416	1.546	1.581
153.0	1.479	1.477	1.607	1.648
156.0	1.545	1.532	1.673	1.703
159.0	1.601	1.587	1.739	1.742
162.0	1.656	1.648	1.800	1.786
165.0	1.706	1.698	1.844	1.830
168.0	1.750	1.742	1.894	1.875
171.0	1.799	1.803	1.938	1.919
174.0	1.849	1.842	1.960	1.941
177.0	1.899	1.891	1.976	1.958
180.0	1.965	1.952	1.976	1.963

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks: