
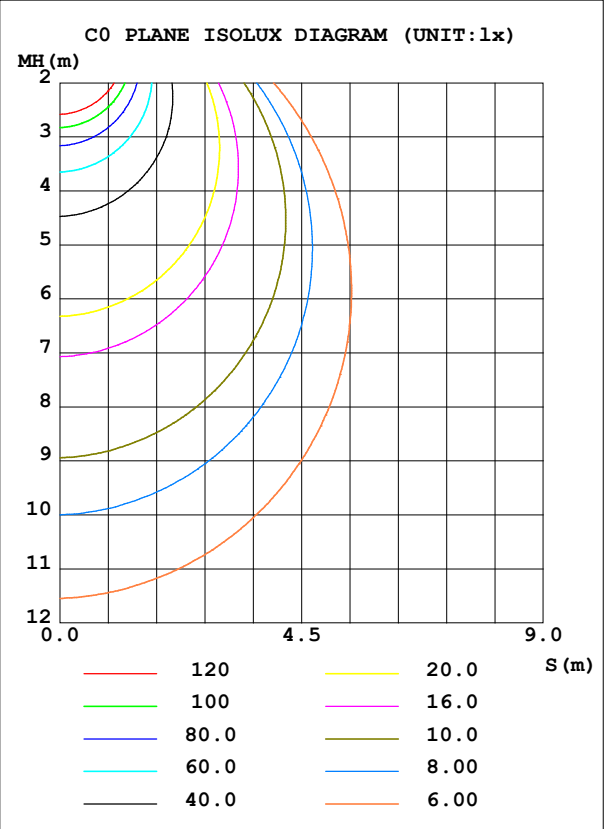


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 103.56 lm/W
MODEL	BRMF12LAJD4WH_4000K	I _{max} (cd)	802.7	S/MH(C0/180)	1.32	
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.26	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2354.2	η UP,DN(C0-180)	0.1,47.1	
NOMINAL FLUX(lm)	2354.22	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.2,52.6	
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	120	η down (%)	99.7	CIBSE SHR MAX	1.35	

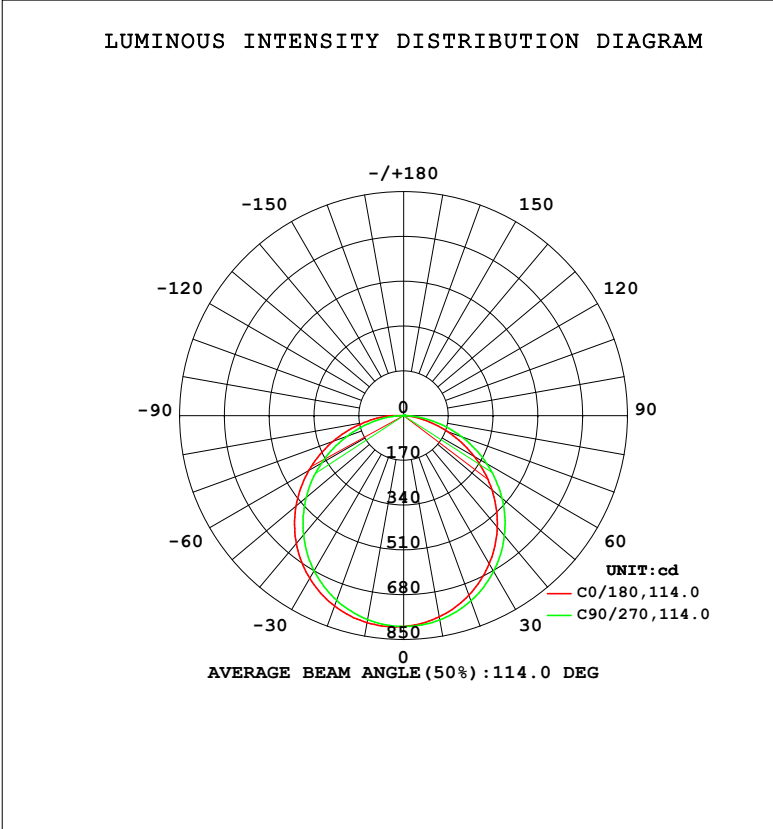

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 90.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.800m [K=1.0000]
Test Date:2025-12-05	Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	775.8	787.8	798.0	786.3					0- 10	75.76	75.76	3.22,3.22
20	724.6	747.9	768.7	745.5					10- 20	217.4	293.1	12.5,12.5
30	650.1	683.0	713.3	680.3					20- 30	330.5	623.7	26.5,26.5
40	552.9	594.8	634.2	591.2					30- 40	400.5	1024	43.5,43.5
50	438.0	487.9	533.8	483.4					40- 50	417.7	1442	61.2,61.2
60	309.3	364.4	415.0	359.1					50- 60	380.1	1822	77.4,77.4
70	176.4	232.9	284.4	228.0					60- 70	293.4	2115	89.9,89.9
80	55.86	105.4	152.8	101.3					70- 80	175.2	2291	97.3,97.3
90	0.2606	1.031	36.40	0.3406					80- 90	55.63	2346	99.7,99.7
100	0.3699	0.3151	0.2931	0.3588					90-100	2.172	2348	99.8,99.8
110	0.6628	0.6024	0.5529	0.6351					100-110	0.4954	2349	99.8,99.8
120	0.9612	0.8952	0.8624	0.9720					110-120	0.7626	2350	99.8,99.8
130	1.210	1.160	1.188	1.281					120-130	0.9577	2351	99.8,99.8
140	1.431	1.392	1.487	1.574					130-140	1.038	2352	99.9,99.9
150	1.630	1.602	1.747	1.801					140-150	0.9928	2353	99.9,99.9
160	1.829	1.812	1.984	2.005					150-160	0.8319	2353	100,100
170	2.028	2.006	2.194	2.165					160-170	0.5656	2354	100,100
180	2.255	2.221	2.260	2.232					170-180	0.2057	2354	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:

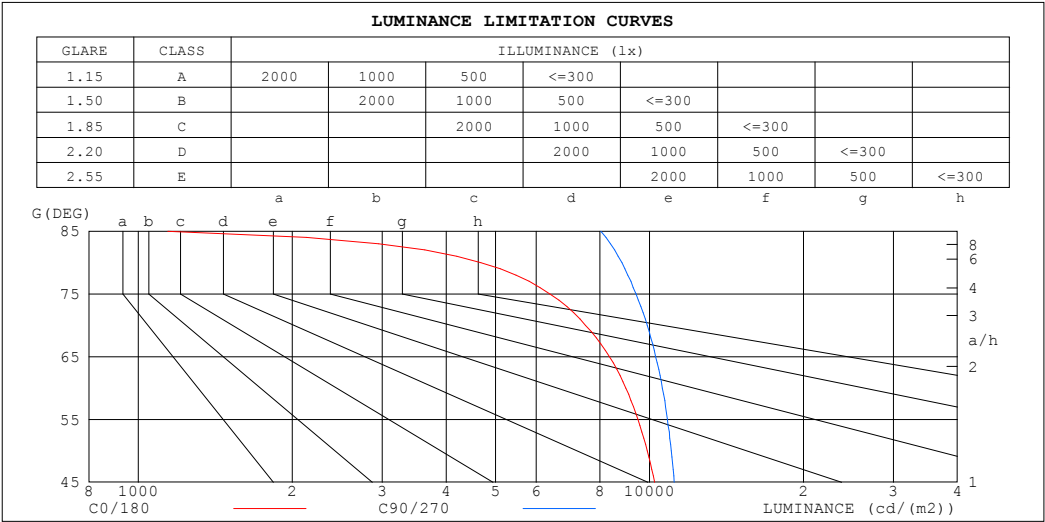

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1141	8036
80	4675	8826
75	6384	9417
70	7497	9901
65	8349	10284
60	8990	10596
55	9498	10841
50	9904	11033
45	10227	11171


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

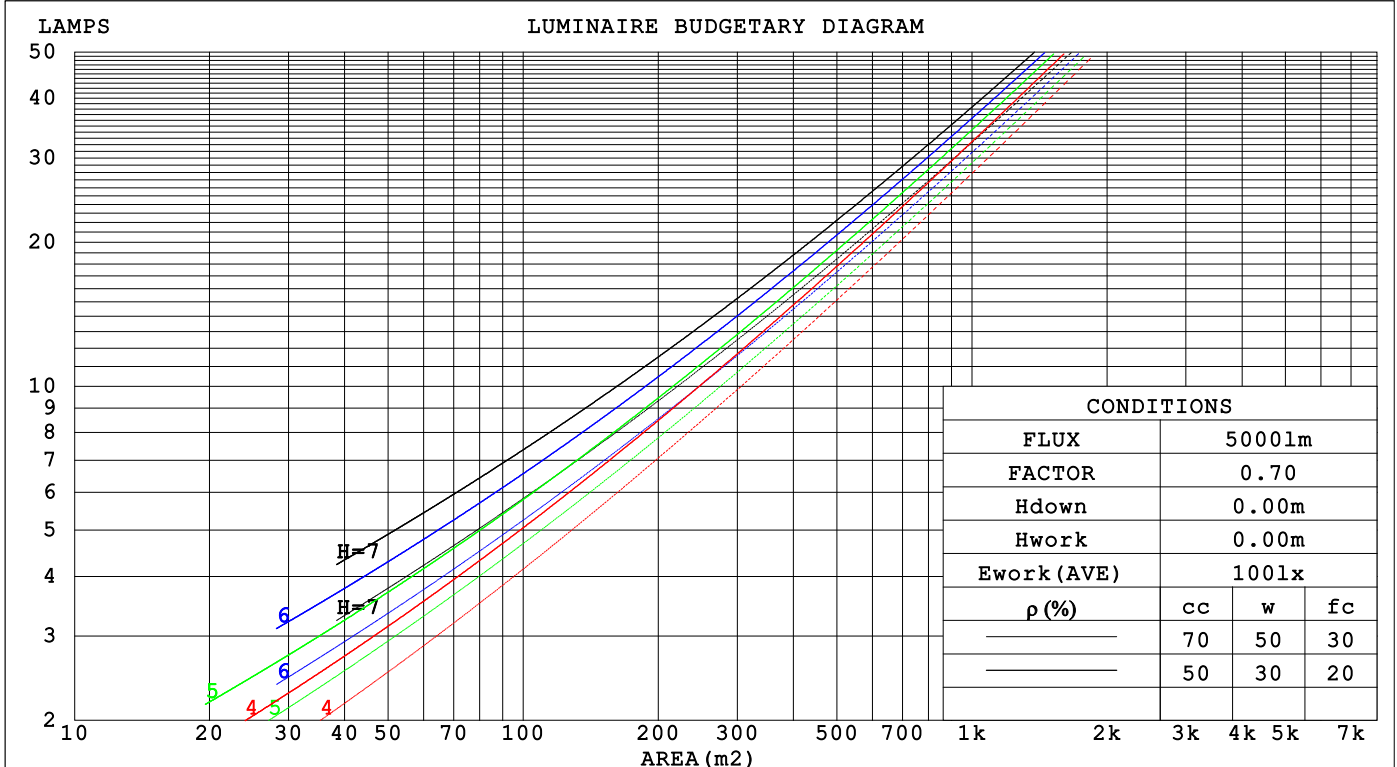

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.318	.181	.057	.311	.177	.056	.297	.170	.054	.285	.164	.053	.273	.158	.051	
2.0	.297	.163	.050	.290	.160	.049	.279	.155	.048	.268	.150	.047	.257	.146	.046	
3.0	.274	.146	.044	.268	.144	.043	.257	.140	.042	.248	.136	.042	.239	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.238	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.183	.159	.136	.157	.136	.117	.107	.094	.081	.062	.054	.047	.020	.017	.015	
2.0	.176	.135	.100	.150	.116	.086	.103	.080	.060	.059	.047	.035	.019	.015	.012	
3.0	.168	.117	.076	.144	.101	.066	.099	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.160	.104	.061	.137	.090	.053	.095	.062	.037	.055	.037	.022	.018	.012	.007	
5.0	.153	.093	.050	.131	.081	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.042	.125	.074	.036	.086	.052	.026	.050	.030	.015	.016	.010	.005	
7.0	.139	.078	.036	.119	.068	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.031	.114	.063	.027	.079	.044	.019	.046	.026	.012	.015	.009	.004	
9.0	.126	.067	.028	.109	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.104	.055	.022	.072	.039	.016	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.: 4000K			
MFR.:					SUR.: 0.296			Shielding Angle:			
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		20.4	21.9	20.7	22.2	22.4	21.0	22.5	21.3	22.7	22.9
3H		21.7	23.1	22.0	23.4	23.6	22.6	24.0	22.9	24.2	24.5
4H		22.2	23.5	22.5	23.8	24.0	23.2	24.6	23.5	24.8	25.1
6H		22.4	23.7	22.7	23.9	24.2	23.7	25.0	24.0	25.3	25.5
8H		22.4	23.6	22.8	23.9	24.2	23.9	25.1	24.2	25.4	25.7
12H		22.4	23.6	22.7	23.9	24.2	24.0	25.2	24.4	25.5	25.8
4H 2H		21.1	22.4	21.4	22.7	22.9	21.5	22.9	21.8	23.1	23.4
3H		22.5	23.7	22.9	24.0	24.3	23.3	24.4	23.6	24.7	25.1
4H		23.1	24.2	23.5	24.5	24.9	24.0	25.1	24.4	25.4	25.8
6H		23.4	24.4	23.9	24.8	25.1	24.7	25.6	25.1	26.0	26.4
8H		23.5	24.4	23.9	24.8	25.2	24.9	25.8	25.3	26.2	26.6
12H		23.5	24.3	23.9	24.7	25.1	25.1	25.9	25.5	26.3	26.7
8H 4H		23.4	24.3	23.8	24.7	25.1	24.2	25.1	24.6	25.5	25.9
6H		23.9	24.6	24.3	25.0	25.5	25.0	25.7	25.4	26.2	26.6
8H		24.0	24.7	24.5	25.1	25.5	25.3	26.0	25.8	26.4	26.9
12H		24.0	24.6	24.5	25.0	25.5	25.5	26.1	26.0	26.6	27.1
12H 4H		23.4	24.2	23.9	24.6	25.1	24.2	25.0	24.7	25.4	25.9
6H		23.9	24.6	24.4	25.0	25.5	25.0	25.7	25.5	26.1	26.6
8H		24.1	24.7	24.6	25.1	25.6	25.4	25.9	25.8	26.4	26.9
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 2354 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 3.0$)
Area: 0.0688 m²

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	64	81	71	64	78	70	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	97	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:

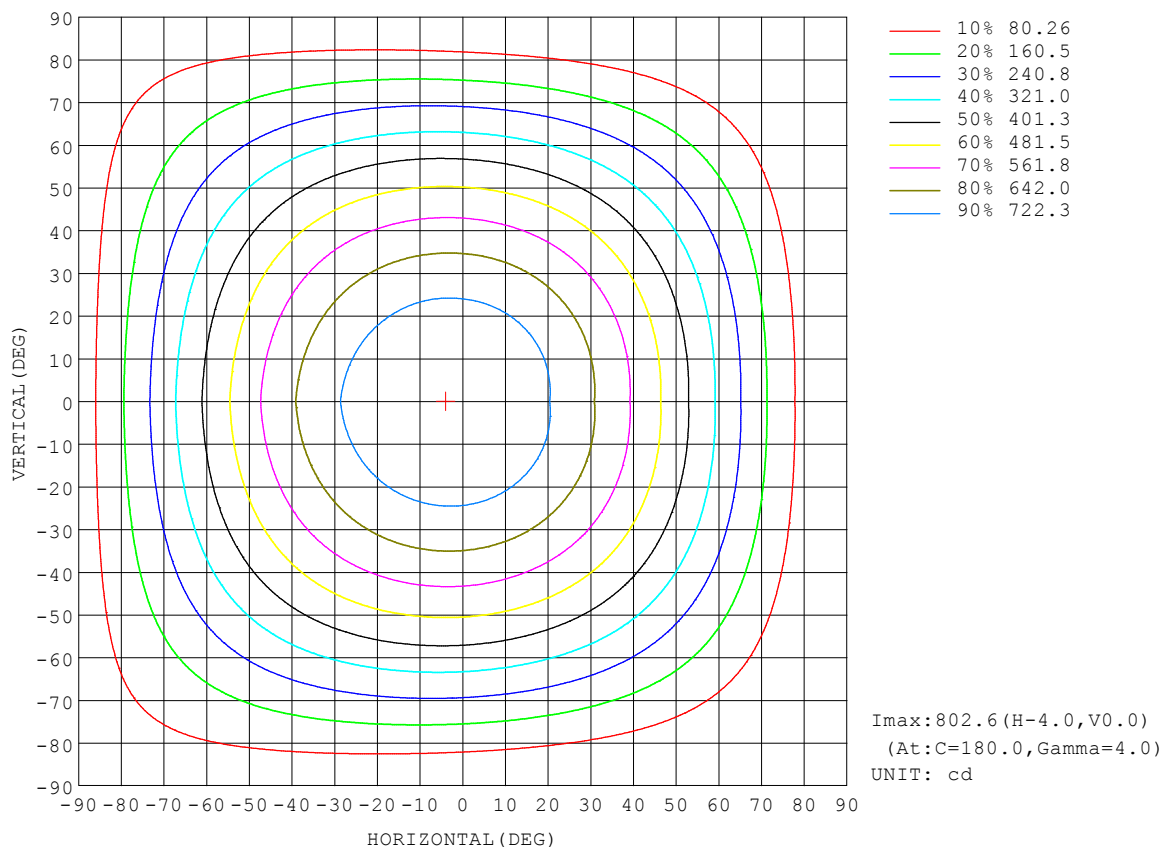


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:

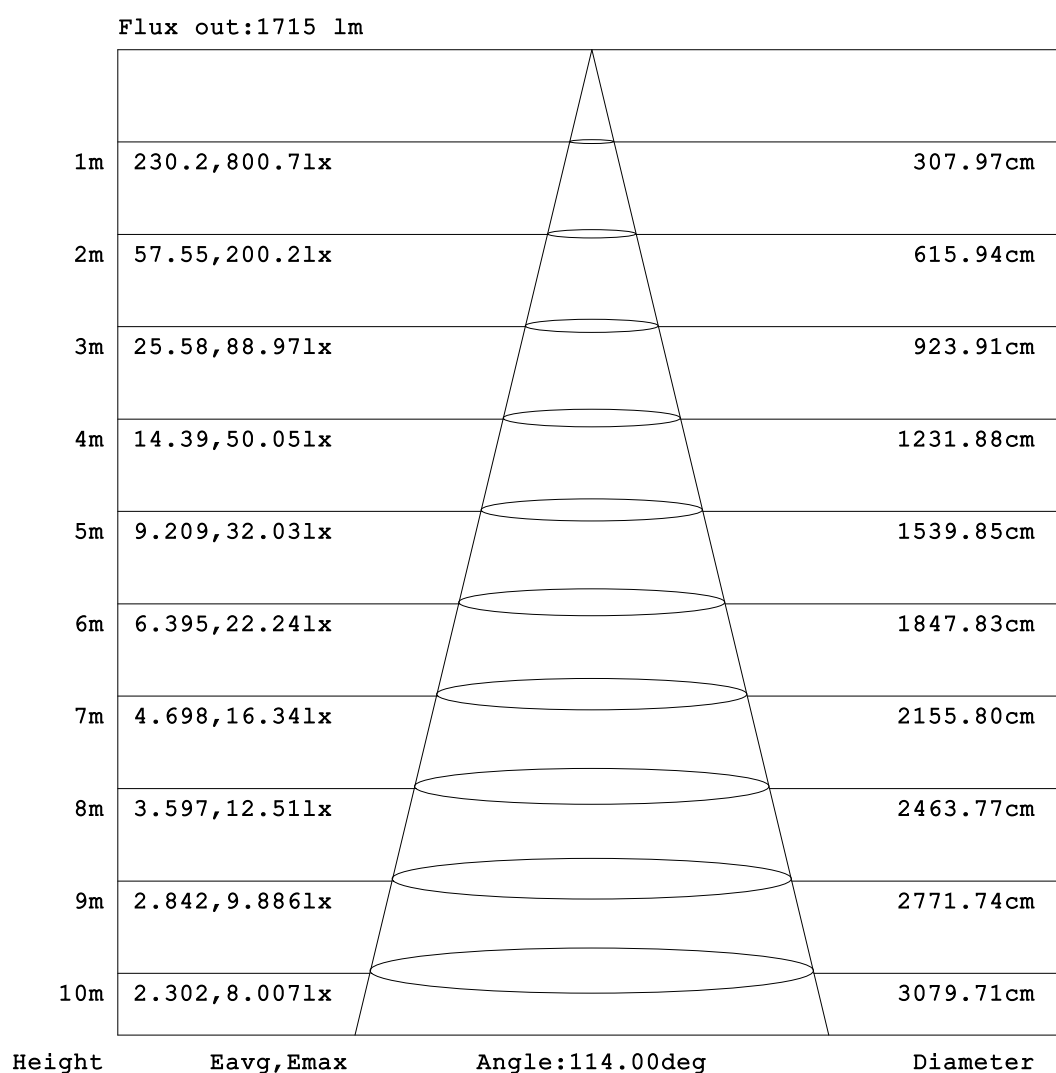


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:

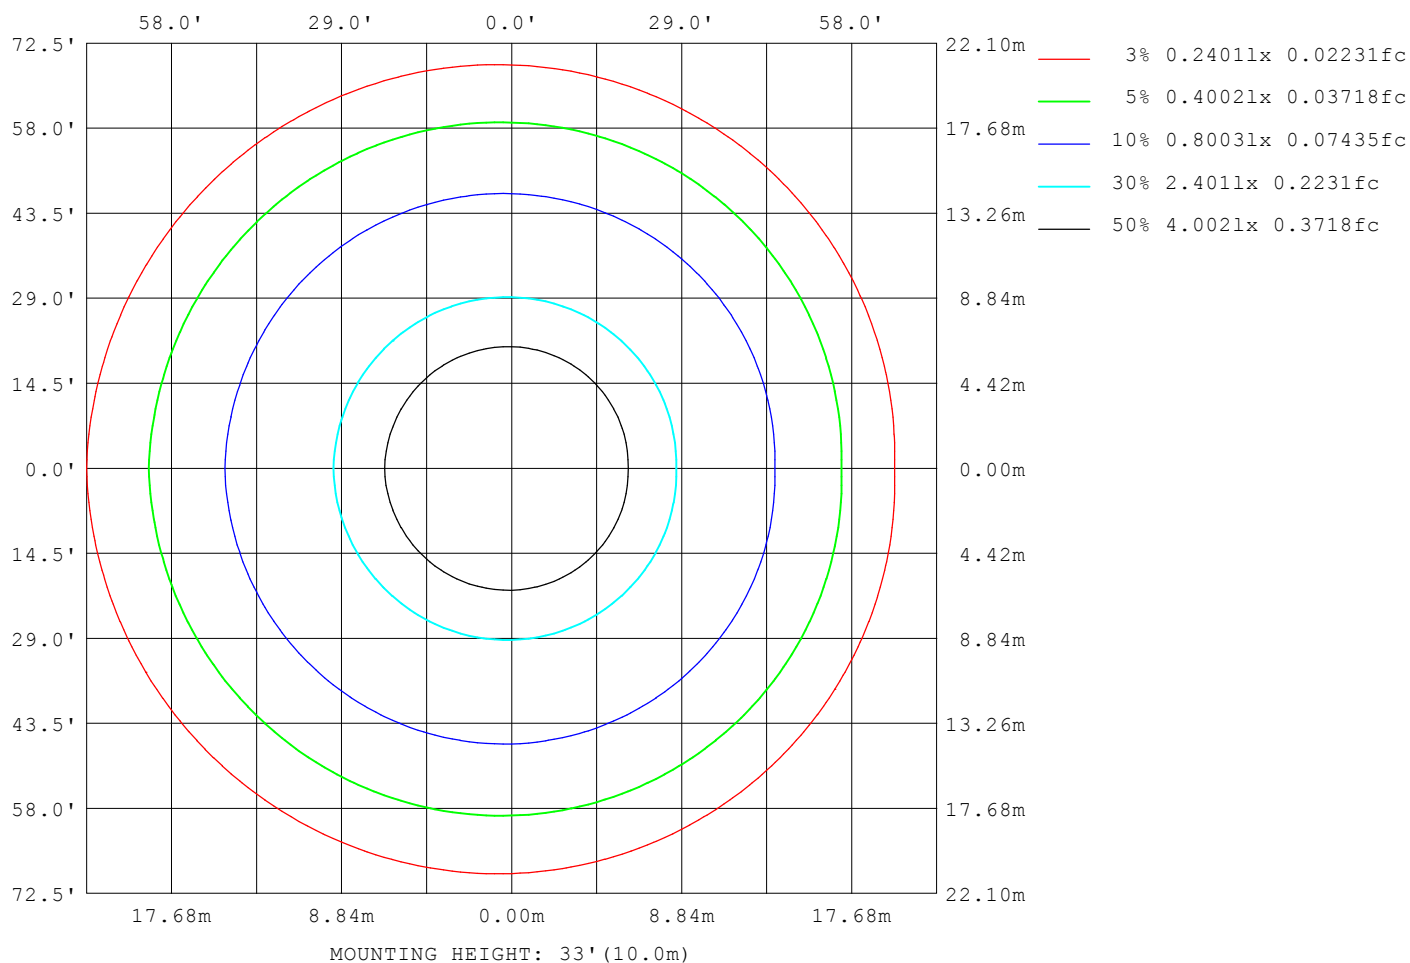

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10212
L_0~180 (75) av	9312
L_0~180 (85) av	8201
L_90~270 (65) av	10194
L_90~270 (75) av	9284
L_90~270 (85) av	7748
L_45 (65) av	10317
L_45 (75) av	9477
L_45 (85) av	8359

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

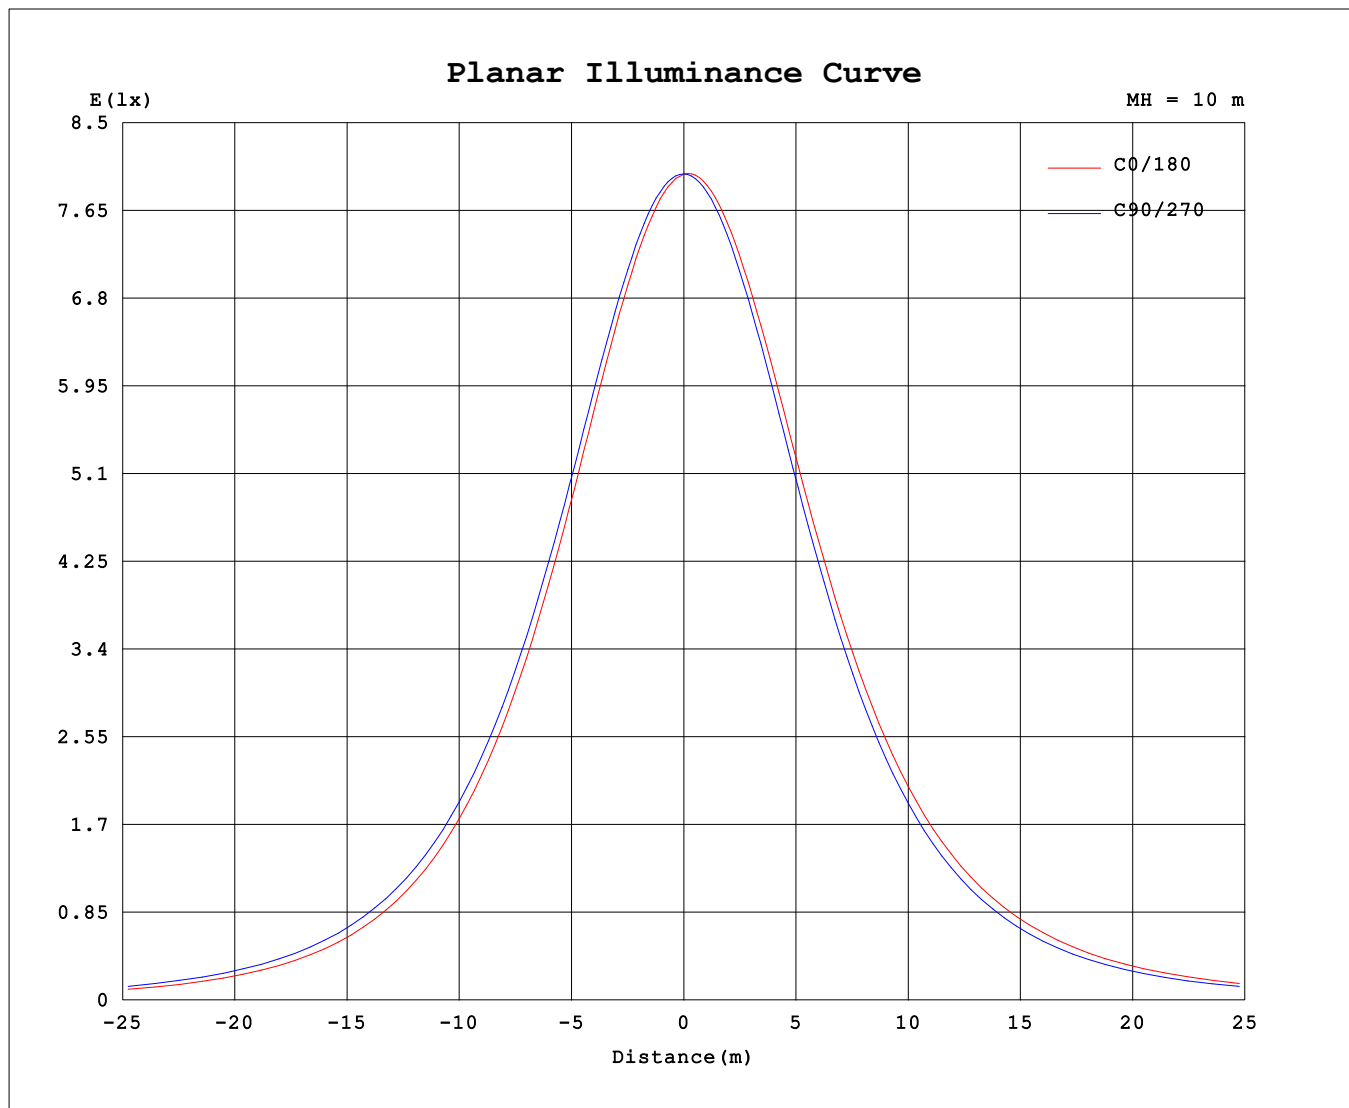

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.95V I:0.1926A P:22.732W PF:0.9837 Freq:59.98Hz Lamp Flux:2354.22x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.296	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	800	800	800	800														
5	791	797	803	797														
10	776	788	798	786														
15	754	771	787	769														
20	725	748	769	746														
25	690	718	744	716														
30	650	683	713	680														
35	604	642	677	638														
40	553	595	634	591														
45	498	543	586	540														
50	438	488	534	483														
55	375	428	476	423														
60	309	364	415	359														
65	243	299	351	294														
70	176	233	284	228														
75	114	168	218	163														
80	55.9	105	153	101														
85	6.85	48.2	91.5	44.7														
90	0.26	1.03	36.4	0.34														
95	0.27	0.20	0.24	0.28														
100	0.37	0.32	0.29	0.36														
105	0.52	0.46	0.40	0.49														
110	0.66	0.60	0.55	0.64														
115	0.82	0.75	0.71	0.81														
120	0.96	0.90	0.86	0.97														
125	1.09	1.04	1.02	1.14														
130	1.21	1.16	1.19	1.28														
135	1.33	1.29	1.34	1.43														
140	1.43	1.39	1.49	1.57														
145	1.52	1.50	1.61	1.70														
150	1.63	1.60	1.75	1.80														
155	1.73	1.71	1.86	1.90														
160	1.83	1.81	1.98	2.01														
165	1.93	1.91	2.10	2.09														
170	2.03	2.01	2.19	2.17														
175	2.13	2.11	2.27	2.23														
180	2.25	2.22	2.26	2.23														

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	800.4	800.4	800.4	800.4
3.0	795.4	799.2	802.6	799.1
6.0	789.3	795.8	802.4	795.2
9.0	778.9	790.2	799.5	788.7
12.0	767.6	781.8	794.2	780.1
15.0	753.6	771.1	786.6	769.1
18.0	737.4	758.0	776.6	755.9
21.0	718.7	742.4	764.3	740.3
24.0	698.0	724.7	749.6	722.1
27.0	674.7	705.0	732.6	702.4
30.0	650.1	683.0	713.3	680.3
33.0	623.3	658.9	692.0	656.0
36.0	594.2	633.0	668.2	629.4
39.0	563.9	604.8	643.1	601.5
42.0	531.4	575.0	615.6	570.9
45.0	497.6	543.4	585.8	539.9
48.0	462.1	510.5	554.8	506.2
51.0	425.8	475.9	521.9	471.5
54.0	387.5	439.7	488.2	435.5
57.0	348.7	402.7	452.2	397.8
60.0	309.3	364.4	415.0	359.1
63.0	269.5	325.4	377.1	320.7
66.0	229.4	285.7	337.7	280.6
69.0	189.7	246.0	298.1	240.9
72.0	151.1	206.4	257.8	201.9
75.0	113.7	167.7	217.9	163.0
78.0	78.42	129.7	178.5	125.5
81.0	45.17	93.36	140.1	89.74
84.0	15.32	59.13	103.3	55.44
87.0	0.2557	27.32	68.73	24.22
90.0	0.2606	1.031	36.40	0.3406
93.0	0.2656	0.1714	7.854	0.2671
96.0	0.2706	0.2212	0.2433	0.2862
99.0	0.3369	0.2930	0.2765	0.3258
102.0	0.4307	0.3759	0.3318	0.3976
105.0	0.5190	0.4643	0.3981	0.4860
108.0	0.5965	0.5472	0.4812	0.5798
111.0	0.6904	0.6410	0.5806	0.6791
114.0	0.7898	0.7184	0.6800	0.7731
117.0	0.8727	0.8069	0.7740	0.8726
120.0	0.9612	0.8952	0.8624	0.9720
123.0	1.039	0.9780	0.9673	1.066
126.0	1.116	1.066	1.050	1.165
129.0	1.199	1.138	1.155	1.259
132.0	1.260	1.210	1.255	1.348
135.0	1.326	1.287	1.343	1.425
138.0	1.398	1.359	1.426	1.519
141.0	1.448	1.414	1.515	1.596
144.0	1.503	1.481	1.592	1.668
147.0	1.575	1.547	1.680	1.740
150.0	1.630	1.602	1.747	1.801
153.0	1.691	1.674	1.824	1.862
156.0	1.746	1.724	1.896	1.928
159.0	1.801	1.790	1.967	1.989
162.0	1.873	1.845	2.034	2.044
165.0	1.928	1.912	2.100	2.094
168.0	1.989	1.967	2.166	2.138
171.0	2.050	2.028	2.222	2.182
174.0	2.111	2.094	2.260	2.210
177.0	2.166	2.144	2.266	2.232
180.0	2.255	2.221	2.260	2.232

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks: