
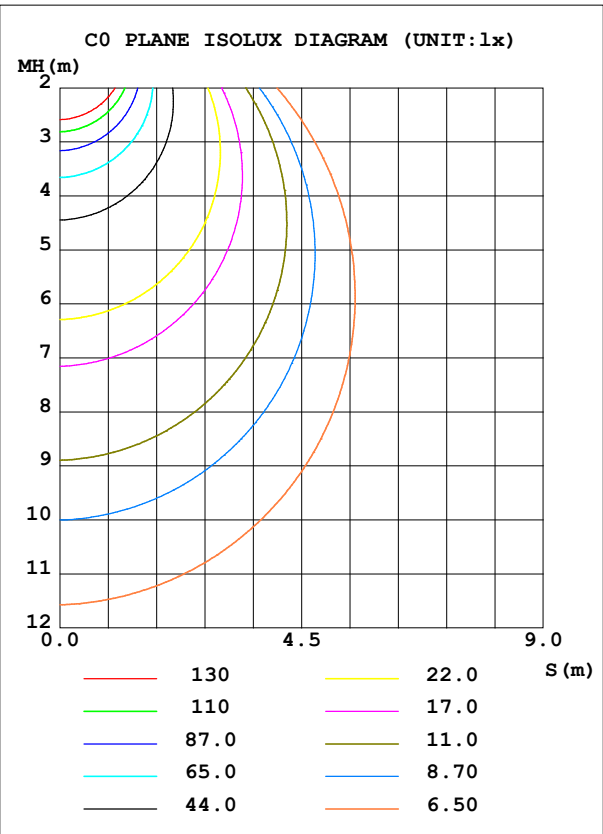


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	BRMF14LAJD4WH_3500K	Imax (cd)	871.7	S/MH (C0/180)	1.31
NOMINAL POWER (W)	28	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2555.4	η UP, DN (C0-180)	0.1,47.6
NOMINAL FLUX (lm)	2555.45	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.2,52.0
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	99.7	CIBSE SHR MAX	1.35

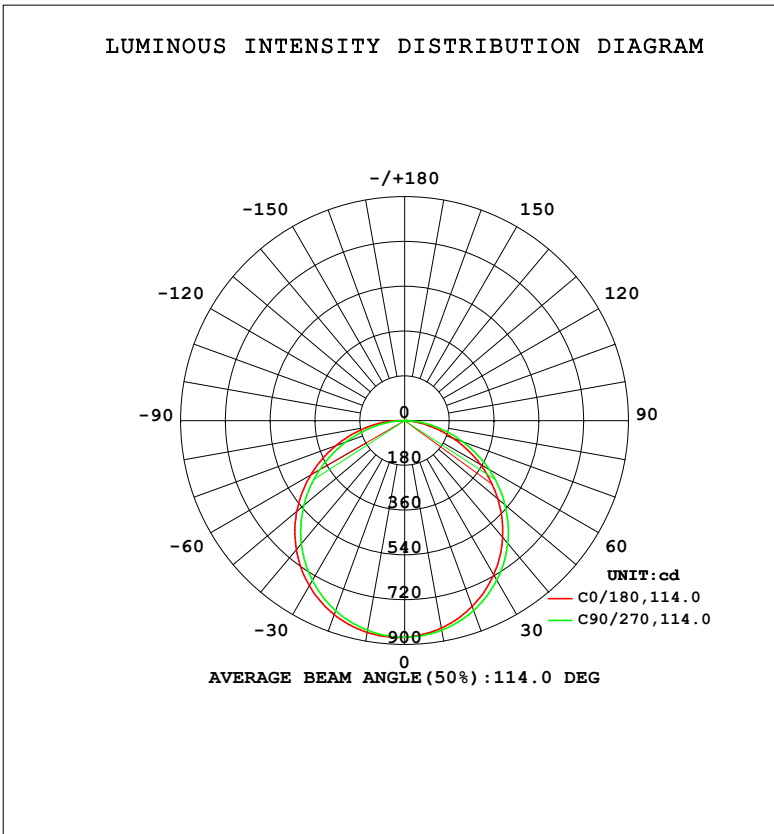

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	846.8	855.4	864.6	855.8					0- 10	82.37	82.37	3.22,3.22
20	794.4	811.6	829.3	812.4					10- 20	236.3	318.7	12.5,12.5
30	715.8	740.5	766.2	741.7					20- 30	359.4	678.1	26.5,26.5
40	612.5	644.5	677.5	646.2					30- 40	435.4	1114	43.6,43.6
50	489.5	526.7	566.0	528.9					40- 50	454.1	1568	61.3,61.3
60	351.1	392.1	436.0	394.2					50- 60	413.0	1981	77.5,77.5
70	207.4	248.1	294.2	250.8					60- 70	318.6	2299	90,90
80	73.84	109.7	152.6	112.1					70- 80	189.8	2489	97.4,97.4
90	0.3429	0.3091	28.45	1.029					80- 90	58.53	2548	99.7,99.7
100	0.3699	0.4145	0.5085	0.4418					90-100	1.484	2549	99.7,99.7
110	0.6902	0.6578	0.7406	0.7235					100-110	0.5965	2550	99.8,99.8
120	0.9942	0.9837	1.011	1.044					110-120	0.8480	2550	99.8,99.8
130	1.270	1.271	1.321	1.370					120-130	1.037	2552	99.8,99.8
140	1.514	1.520	1.641	1.679					130-140	1.120	2553	99.9,99.9
150	1.729	1.741	1.895	1.928					140-150	1.068	2554	99.9,99.9
160	1.961	1.945	2.160	2.133					150-160	0.8933	2555	100,100
170	2.193	2.177	2.387	2.343					160-170	0.6103	2555	100,100
180	2.409	2.376	2.431	2.392					170-180	0.2218	2555	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:

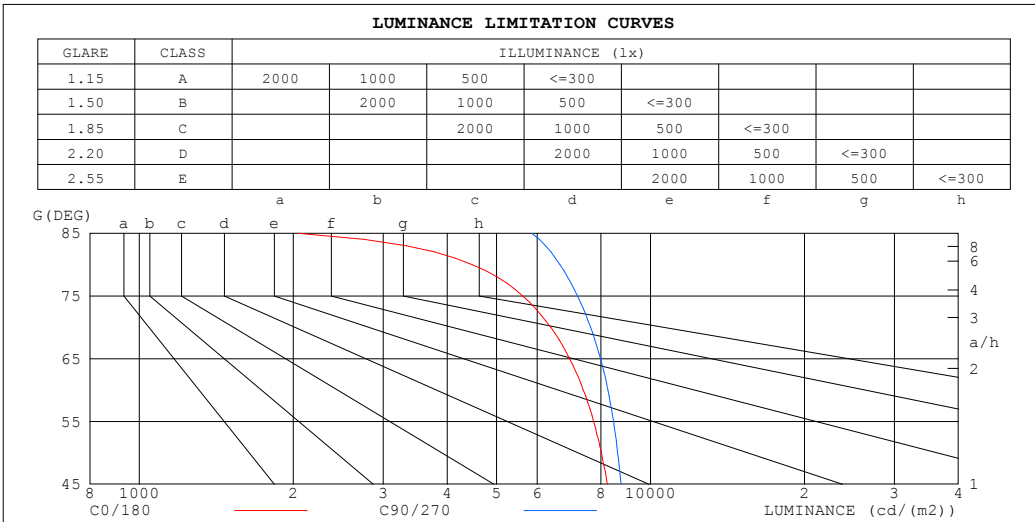

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2045	5856
80	4476	6651
75	5627	7202
70	6382	7635
65	6946	7981
60	7391	8254
55	7740	8467
50	8016	8625
45	8235	8754


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz		
Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.53	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

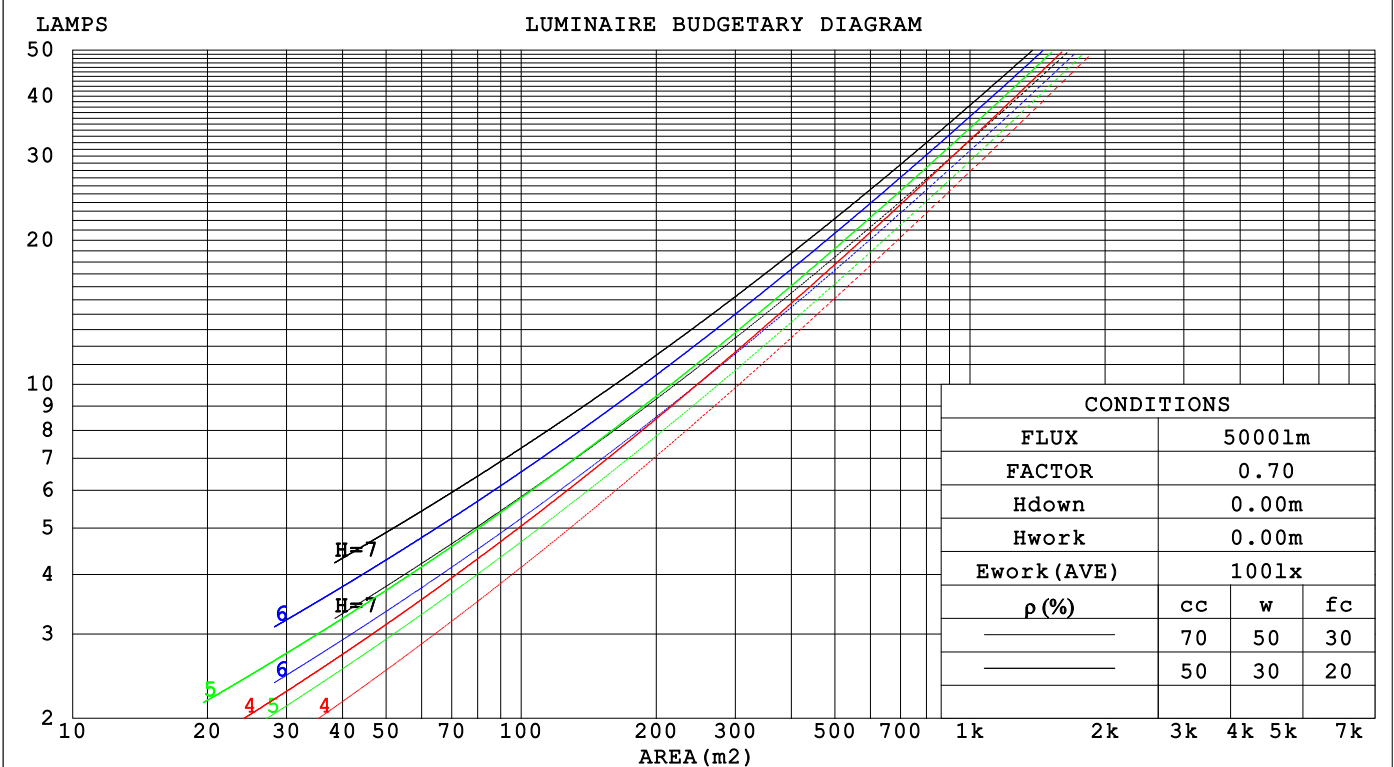

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz		
Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.317	.180	.057	.310	.177	.056	.296	.170	.054	.284	.164	.053	.272	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.155	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.247	.136	.042	.238	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.183	.158	.136	.157	.136	.117	.107	.094	.081	.062	.054	.047	.020	.017	.015	
2.0	.175	.134	.100	.150	.116	.086	.103	.080	.060	.059	.047	.035	.019	.015	.011	
3.0	.168	.117	.076	.144	.101	.066	.099	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.160	.103	.060	.137	.089	.052	.094	.062	.037	.055	.036	.022	.018	.012	.007	
5.0	.152	.093	.049	.131	.081	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.041	.125	.073	.036	.086	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.035	.119	.067	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.031	.113	.062	.027	.079	.044	.019	.046	.026	.011	.015	.008	.004	
9.0	.126	.067	.028	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.055	.022	.072	.038	.015	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz										
Lamp Flux:2555.45x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.: 3500K				
MFR.:			SUR.: 0.348			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.8	21.3	20.0	21.5	21.7	20.1	21.7	20.4	21.9	22.1
3H	21.1	22.6	21.4	22.8	23.0	21.7	23.1	22.0	23.4	23.6
4H	21.6	23.0	22.0	23.2	23.5	22.3	23.7	22.7	23.9	24.2
6H	21.9	23.2	22.3	23.5	23.8	22.8	24.1	23.2	24.4	24.6
8H	22.0	23.2	22.3	23.5	23.8	23.0	24.2	23.3	24.5	24.8
12H	22.0	23.2	22.3	23.5	23.8	23.1	24.3	23.4	24.6	24.9
4H 2H	20.4	21.7	20.7	22.0	22.3	20.7	22.0	21.0	22.3	22.6
3H	22.0	23.1	22.3	23.4	23.8	22.4	23.6	22.8	23.9	24.2
4H	22.6	23.7	23.0	24.0	24.3	23.2	24.3	23.6	24.6	24.9
6H	23.0	24.0	23.4	24.3	24.7	23.8	24.8	24.2	25.1	25.5
8H	23.1	24.0	23.5	24.4	24.8	24.0	24.9	24.4	25.3	25.7
12H	23.1	23.9	23.5	24.3	24.7	24.2	25.0	24.6	25.4	25.8
8H 4H	22.9	23.8	23.3	24.1	24.5	23.4	24.3	23.8	24.7	25.1
6H	23.4	24.2	23.9	24.6	25.0	24.1	24.9	24.6	25.3	25.7
8H	23.6	24.2	24.0	24.7	25.1	24.4	25.1	24.9	25.5	26.0
12H	23.6	24.2	24.1	24.7	25.1	24.7	25.2	25.1	25.7	26.2
12H 4H	22.9	23.7	23.3	24.1	24.5	23.4	24.2	23.8	24.6	25.0
6H	23.5	24.1	23.9	24.6	25.0	24.2	24.8	24.7	25.3	25.7
8H	23.7	24.2	24.2	24.7	25.2	24.5	25.1	25.0	25.5	26.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2555 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.3)
 Area: 0.095 m2

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	93	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:

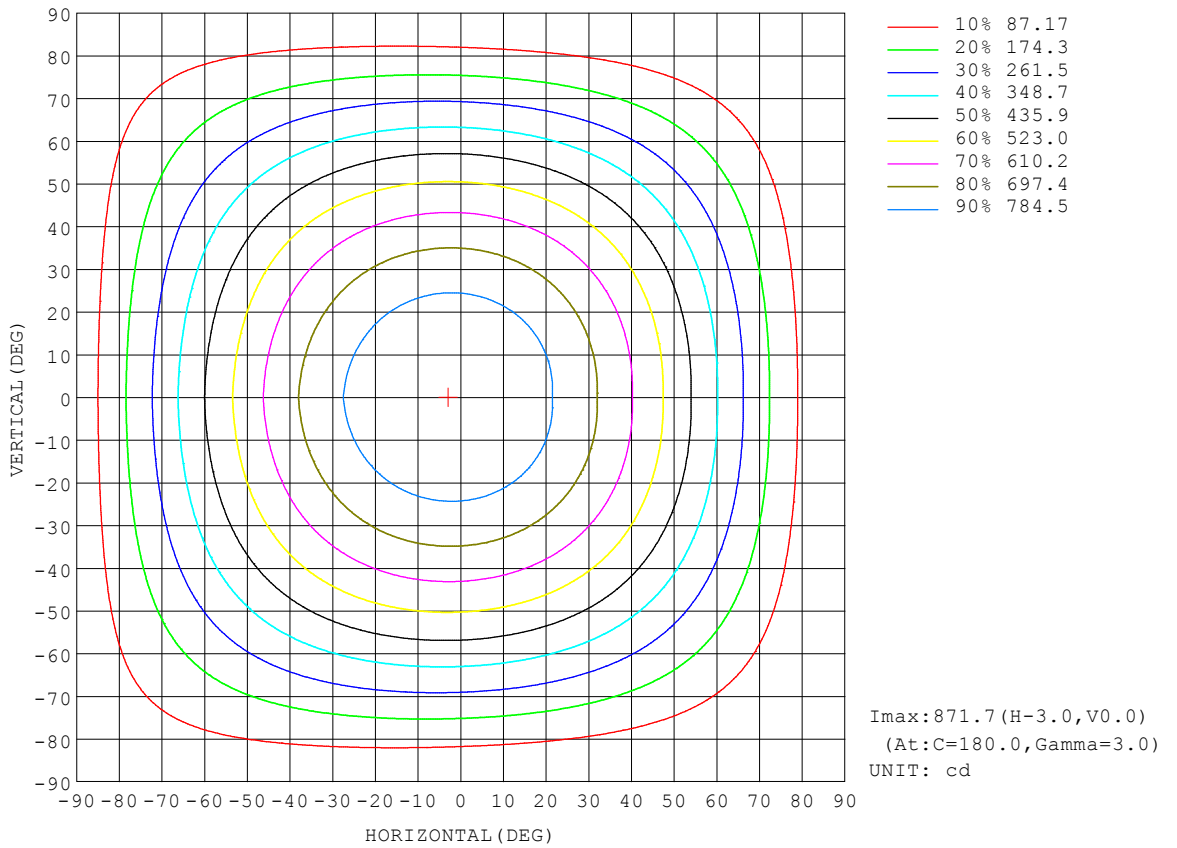


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:

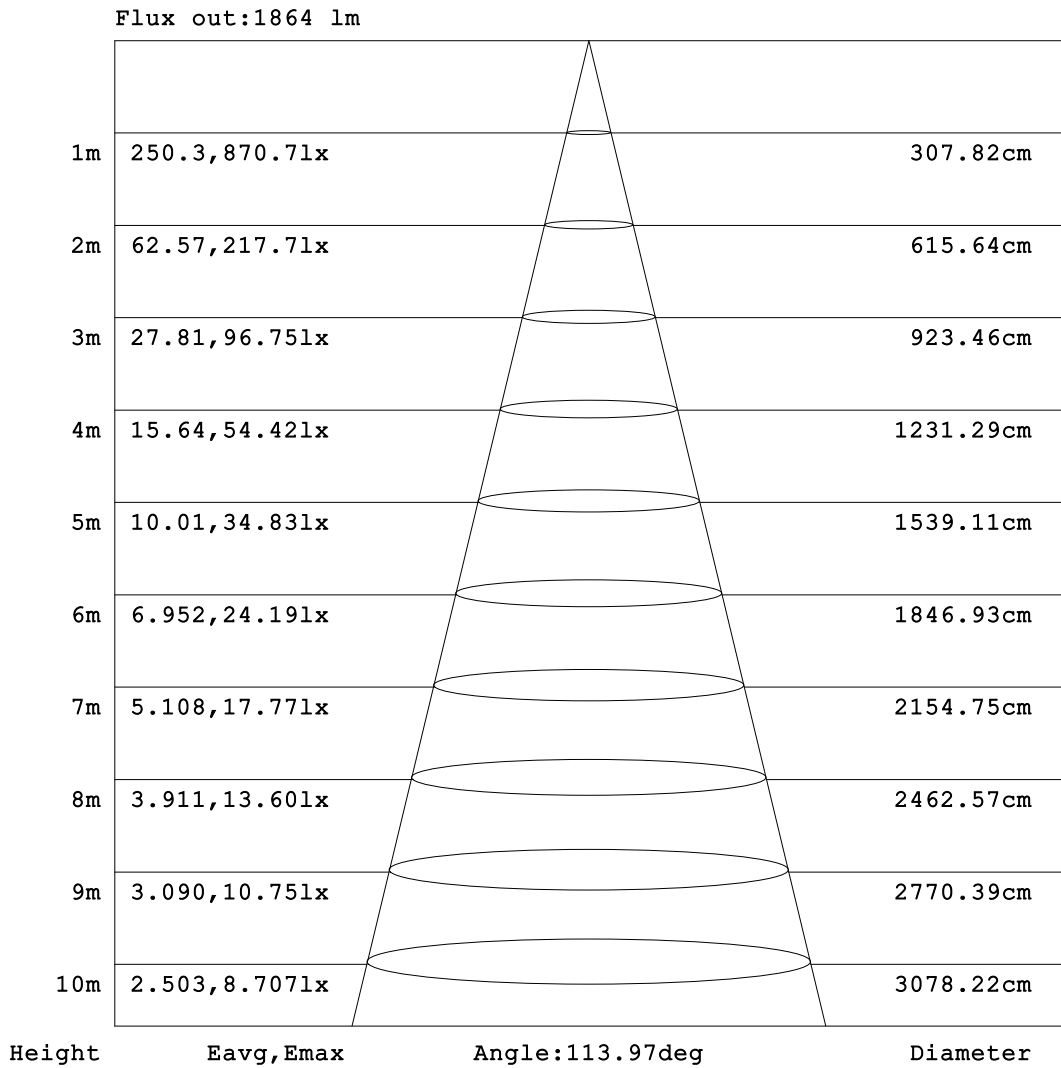


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:

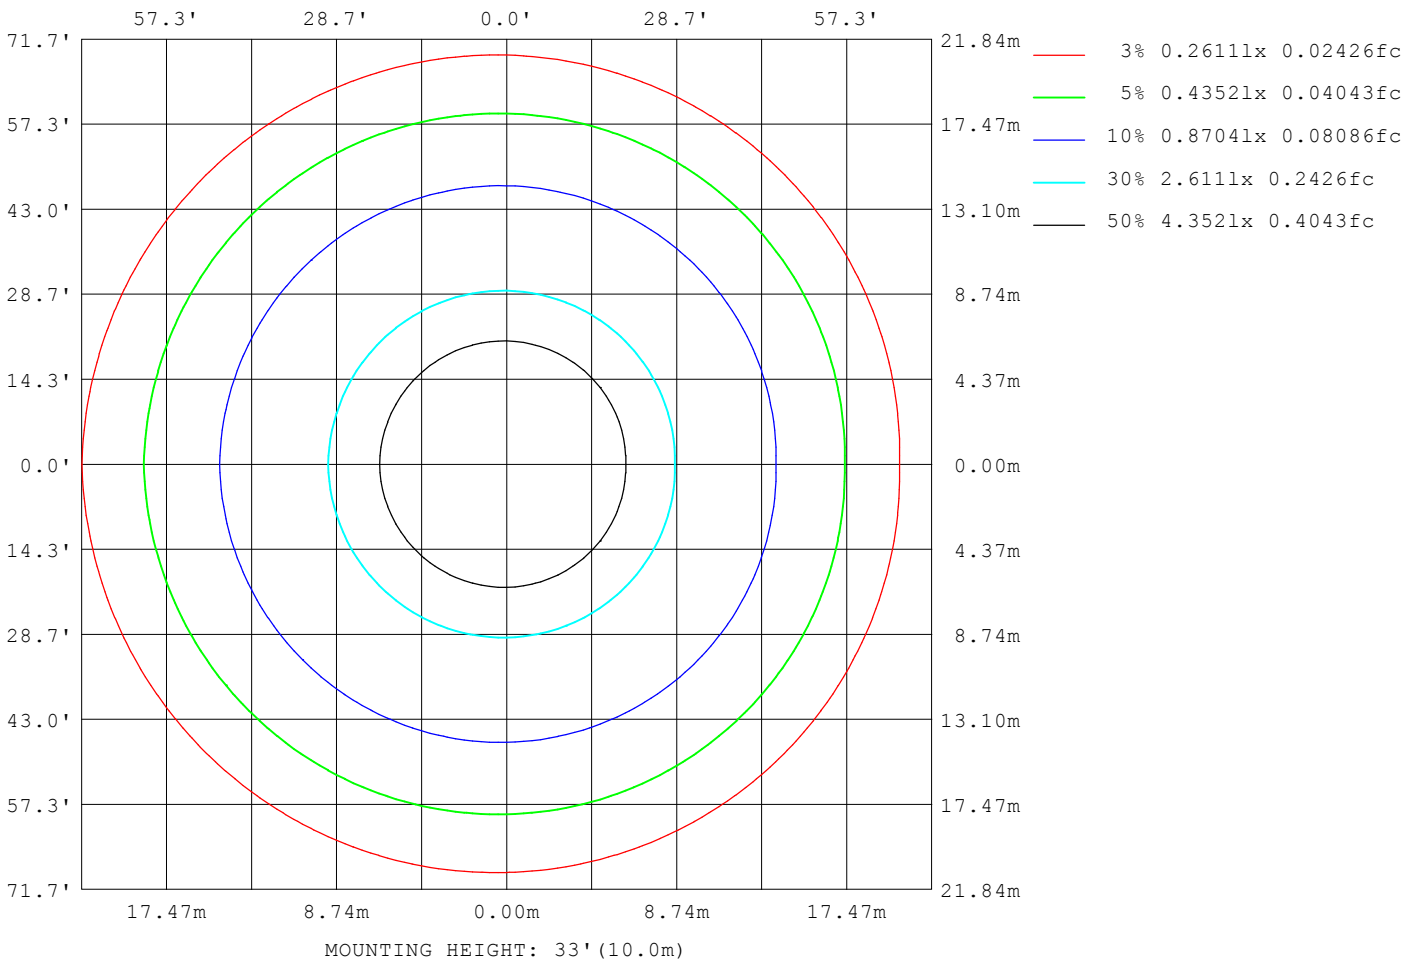

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8031
L_0~180 (75) av	7336
L_0~180 (85) av	6276
L_90~270 (65) av	8012
L_90~270 (75) av	7252
L_90~270 (85) av	5990
L_45 (65) av	8087
L_45 (75) av	7390
L_45 (85) av	6362

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Planar Illuminance Curve

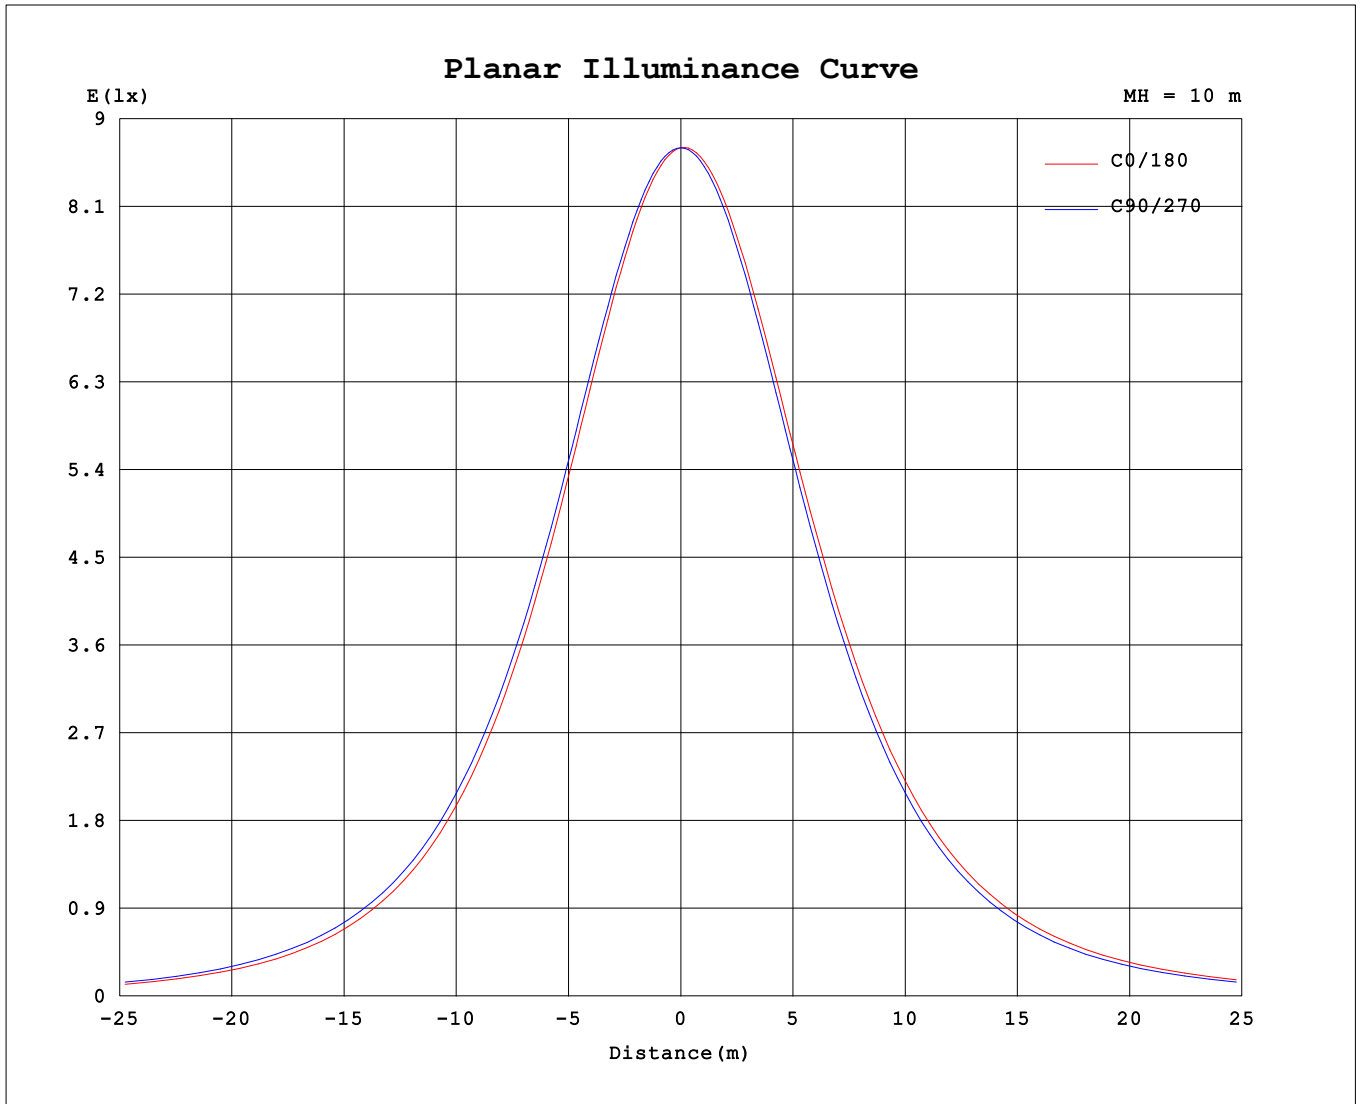

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.04V I:0.2210A P:26.129W PF:0.9849 Freq:59.98Hz Lamp Flux:2555.45x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 3500K
MFR.:	SUR.: 0.348	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	870	870	870	870															
5	862	867	871	867															
10	847	855	865	856															
15	824	837	851	838															
20	794	812	829	812															
25	758	779	801	780															
30	716	741	766	742															
35	667	696	725	697															
40	612	645	677	646															
45	553	588	624	590															
50	489	527	566	529															
55	422	461	503	463															
60	351	392	436	394															
65	279	320	366	323															
70	207	248	294	251															
75	138	177	222	180															
80	73.8	110	153	112															
85	16.9	48.5	87.0	50.7															
90	0.34	0.31	28.4	1.03															
95	0.23	0.31	0.41	0.34															
100	0.37	0.41	0.51	0.44															
105	0.53	0.53	0.62	0.57															
110	0.69	0.66	0.74	0.72															
115	0.85	0.83	0.87	0.88															
120	0.99	0.98	1.01	1.04															
125	1.14	1.14	1.16	1.20															
130	1.27	1.27	1.32	1.37															
135	1.40	1.40	1.49	1.53															
140	1.51	1.52	1.64	1.68															
145	1.61	1.62	1.78	1.80															
150	1.73	1.74	1.90	1.93															
155	1.84	1.83	2.03	2.04															
160	1.96	1.95	2.16	2.13															
165	2.09	2.04	2.28	2.24															
170	2.19	2.18	2.39	2.34															
175	2.28	2.28	2.43	2.40															
180	2.41	2.38	2.43	2.39															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	870.3	870.3	870.3	870.3
3.0	866.2	868.9	871.7	869.1
6.0	859.7	864.9	870.3	865.0
9.0	850.3	858.2	866.3	858.5
12.0	838.4	849.0	859.6	849.5
15.0	824.0	837.1	850.6	837.6
18.0	807.1	822.5	838.7	823.3
21.0	787.7	805.7	824.3	806.5
24.0	766.0	786.5	807.3	787.1
27.0	741.9	764.6	788.0	765.7
30.0	715.8	740.5	766.2	741.7
33.0	687.3	714.4	742.2	715.5
36.0	656.5	686.1	716.0	687.3
39.0	623.9	655.3	687.4	656.6
42.0	589.6	622.7	656.9	624.1
45.0	553.1	588.1	624.4	589.9
48.0	515.2	551.9	589.8	553.6
51.0	476.1	514.0	553.7	515.8
54.0	435.4	474.5	515.8	476.8
57.0	393.6	434.0	476.5	436.1
60.0	351.1	392.1	436.0	394.2
63.0	307.8	349.3	394.4	351.8
66.0	264.4	306.0	351.9	308.3
69.0	221.5	262.5	308.8	264.9
72.0	179.0	219.2	265.5	222.1
75.0	138.4	177.1	222.4	179.5
78.0	99.06	135.9	180.2	138.6
81.0	61.72	96.82	139.1	99.59
84.0	27.37	60.18	99.71	62.45
87.0	0.4470	26.38	62.61	28.36
90.0	0.3429	0.3091	28.45	1.029
93.0	0.2389	0.2984	0.6107	0.3323
96.0	0.2648	0.3262	0.4257	0.3424
99.0	0.3477	0.3870	0.4810	0.4143
102.0	0.4362	0.4587	0.5417	0.5025
105.0	0.5301	0.5306	0.6191	0.5690
108.0	0.6240	0.6081	0.6909	0.6573
111.0	0.7234	0.6965	0.7682	0.7512
114.0	0.8119	0.8015	0.8401	0.8451
117.0	0.9002	0.8954	0.9340	0.9335
120.0	0.9942	0.9837	1.011	1.044
123.0	1.083	1.072	1.094	1.132
126.0	1.171	1.161	1.194	1.243
129.0	1.243	1.243	1.288	1.348
132.0	1.320	1.321	1.387	1.442
135.0	1.397	1.398	1.487	1.530
138.0	1.469	1.470	1.575	1.619
141.0	1.525	1.536	1.663	1.702
144.0	1.596	1.597	1.752	1.773
147.0	1.668	1.674	1.824	1.856
150.0	1.729	1.741	1.895	1.928
153.0	1.790	1.801	1.978	1.994
156.0	1.867	1.857	2.061	2.055
159.0	1.939	1.918	2.127	2.122
162.0	2.011	1.984	2.210	2.182
165.0	2.088	2.045	2.282	2.243
168.0	2.165	2.117	2.337	2.309
171.0	2.210	2.205	2.403	2.359
174.0	2.254	2.260	2.422	2.392
177.0	2.320	2.310	2.442	2.414
180.0	2.409	2.376	2.431	2.392

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks: