
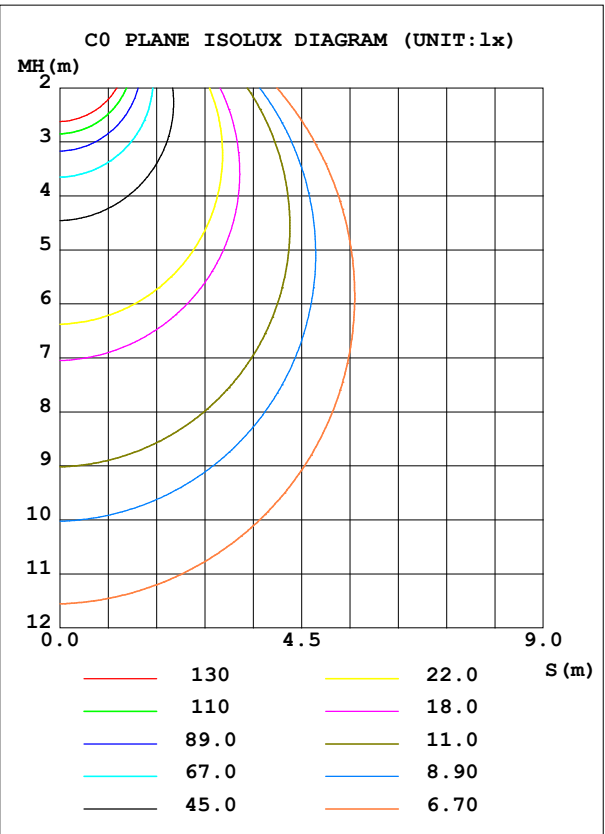


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	BRMF14LAJD4WH_4000K	Imax (cd)	895.7	S/MH (C0/180)	1.31
NOMINAL POWER (W)	28	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2626.0	η UP, DN (C0-180)	0.1,47.7
NOMINAL FLUX (lm)	2626.03	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.2,52.0
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	99.7	CIBSE SHR MAX	1.35

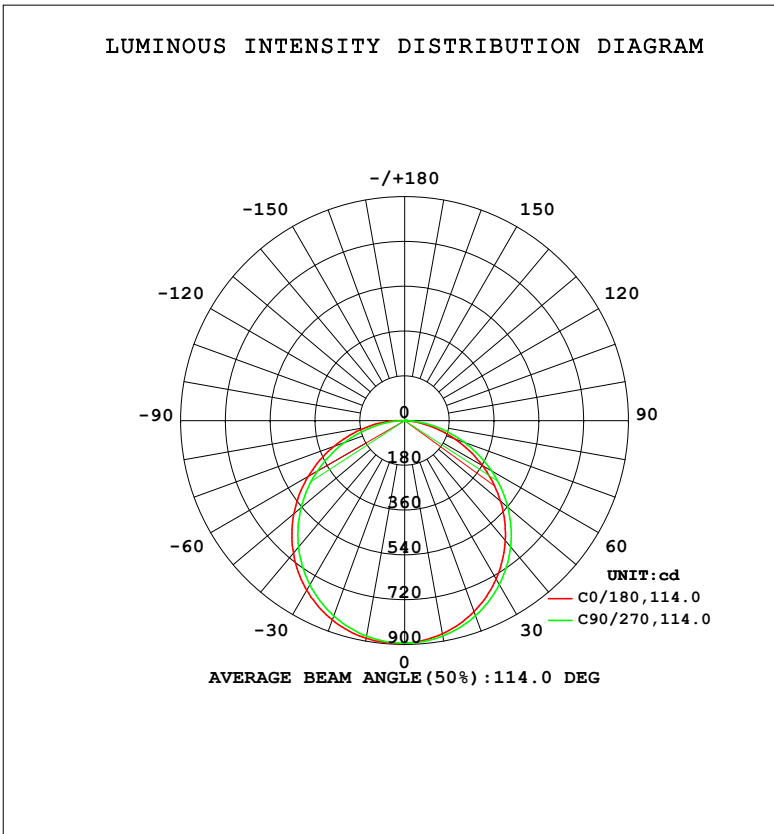

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	870.2	879.2	888.4	879.5					0- 10	84.65	84.65	3.22,3.22
20	816.5	833.9	852.0	834.7					10- 20	242.9	327.5	12.5,12.5
30	735.5	761.1	787.3	762.2					20- 30	369.3	696.8	26.5,26.5
40	629.7	662.3	696.0	664.0					30- 40	447.5	1144	43.6,43.6
50	503.1	541.2	581.5	543.5					40- 50	466.6	1611	61.3,61.3
60	361.0	402.7	447.8	405.2					50- 60	424.4	2035	77.5,77.5
70	213.2	254.8	302.0	257.7					60- 70	327.4	2363	90,90
80	76.18	112.7	156.5	115.2					70- 80	195.0	2558	97.4,97.4
90	0.1603	0.3037	29.15	1.048					80- 90	60.13	2618	99.7,99.7
100	0.3865	0.4256	0.5032	0.4528					90-100	1.503	2619	99.7,99.7
110	0.7124	0.6908	0.7573	0.7455					100-110	0.6136	2620	99.8,99.8
120	1.027	1.017	1.039	1.072					110-120	0.8722	2621	99.8,99.8
130	1.309	1.310	1.365	1.425					120-130	1.070	2622	99.8,99.8
140	1.552	1.553	1.686	1.734					130-140	1.153	2623	99.9,99.9
150	1.773	1.790	1.956	1.983					140-150	1.098	2624	99.9,99.9
160	2.022	2.000	2.216	2.199					150-160	0.9195	2625	100,100
170	2.254	2.238	2.454	2.414					160-170	0.6282	2626	100,100
180	2.486	2.447	2.503	2.464					170-180	0.2283	2626	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:

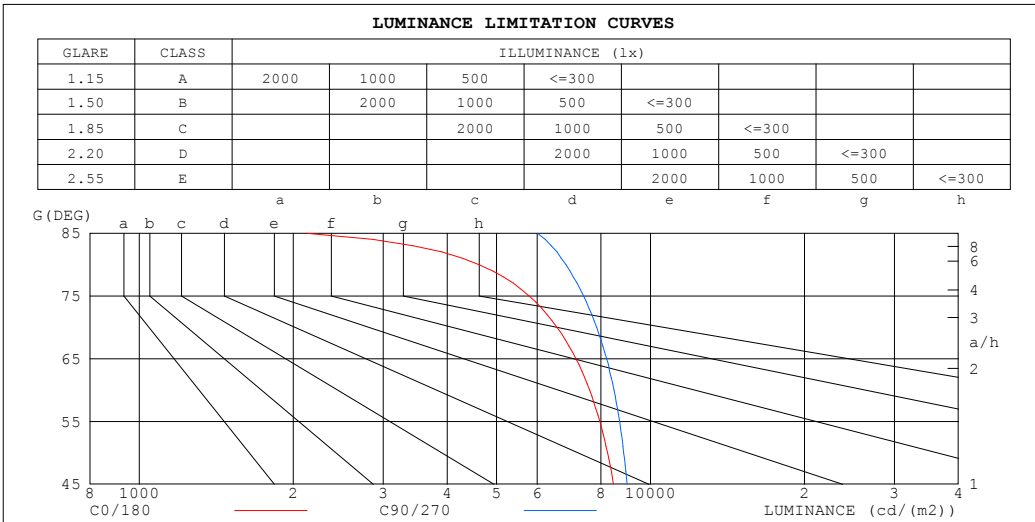


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.53	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

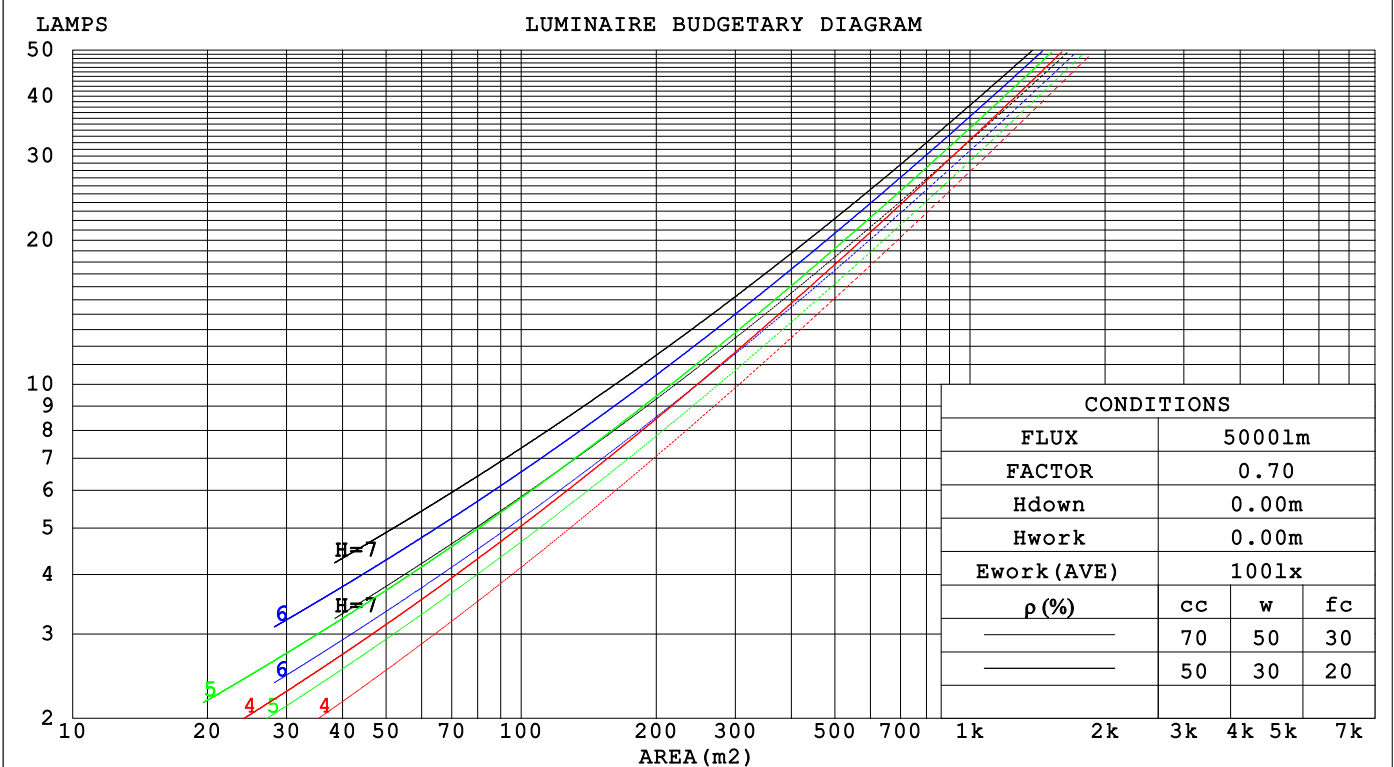

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz		
Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.317	.180	.057	.310	.177	.056	.296	.170	.054	.284	.164	.053	.272	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.155	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.247	.136	.042	.238	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.183	.158	.136	.157	.136	.117	.107	.094	.081	.062	.054	.047	.020	.017	.015	
2.0	.175	.134	.100	.150	.116	.086	.103	.080	.060	.059	.047	.035	.019	.015	.011	
3.0	.168	.117	.076	.144	.101	.066	.099	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.160	.103	.060	.137	.089	.052	.094	.062	.037	.055	.036	.022	.018	.012	.007	
5.0	.152	.093	.049	.131	.081	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.041	.125	.073	.036	.086	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.035	.119	.067	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.031	.113	.062	.027	.079	.044	.019	.046	.026	.011	.015	.008	.004	
9.0	.126	.067	.028	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.055	.022	.072	.038	.015	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz										
Lamp Flux:2626.03x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.: 4000K			
MFR.:			SUR.: 0.348				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.9	21.4	20.1	21.6	21.8	20.2	21.8	20.5	22.0	22.2
3H	21.2	22.7	21.5	22.9	23.1	21.8	23.2	22.1	23.5	23.7
4H	21.7	23.1	22.1	23.3	23.6	22.4	23.8	22.8	24.0	24.3
6H	22.0	23.3	22.4	23.6	23.9	22.9	24.2	23.2	24.5	24.7
8H	22.1	23.3	22.4	23.6	23.9	23.1	24.3	23.4	24.6	24.9
12H	22.1	23.3	22.5	23.6	23.9	23.2	24.3	23.5	24.6	25.0
4H 2H	20.5	21.8	20.8	22.1	22.4	20.8	22.1	21.1	22.4	22.7
3H	22.1	23.2	22.4	23.5	23.9	22.5	23.7	22.9	24.0	24.3
4H	22.7	23.8	23.1	24.1	24.4	23.3	24.4	23.7	24.7	25.0
6H	23.1	24.1	23.5	24.4	24.8	23.9	24.9	24.3	25.2	25.6
8H	23.2	24.1	23.6	24.5	24.9	24.1	25.0	24.5	25.4	25.8
12H	23.2	24.0	23.6	24.4	24.8	24.2	25.1	24.7	25.5	25.9
8H 4H	23.0	23.9	23.4	24.2	24.6	23.5	24.4	23.9	24.8	25.2
6H	23.5	24.3	24.0	24.7	25.1	24.2	25.0	24.7	25.4	25.8
8H	23.7	24.3	24.1	24.8	25.2	24.5	25.2	25.0	25.6	26.1
12H	23.7	24.3	24.2	24.8	25.3	24.8	25.3	25.2	25.8	26.3
12H 4H	23.0	23.8	23.4	24.2	24.6	23.5	24.3	23.9	24.7	25.1
6H	23.6	24.2	24.0	24.7	25.1	24.3	24.9	24.7	25.4	25.8
8H	23.8	24.3	24.3	24.8	25.3	24.6	25.2	25.1	25.6	26.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2626 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.4)
 Area: 0.095 m2

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	93	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:

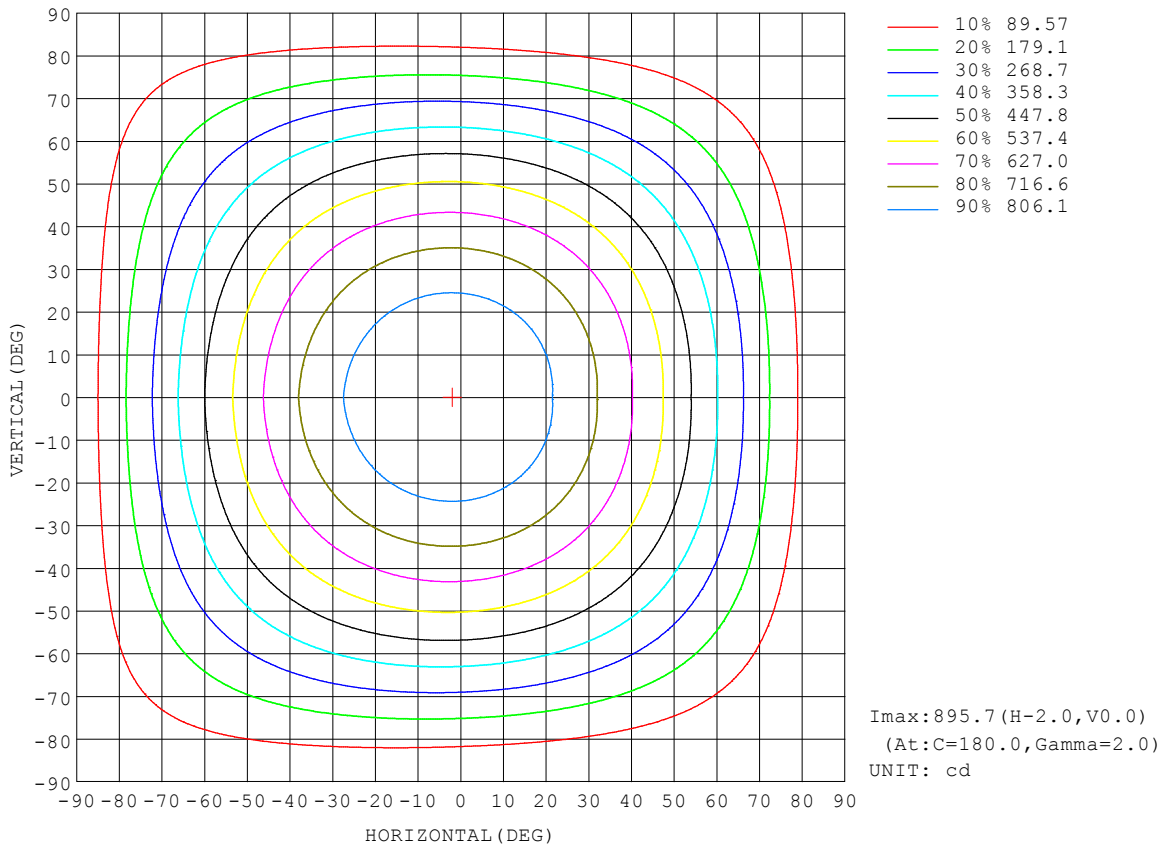


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:

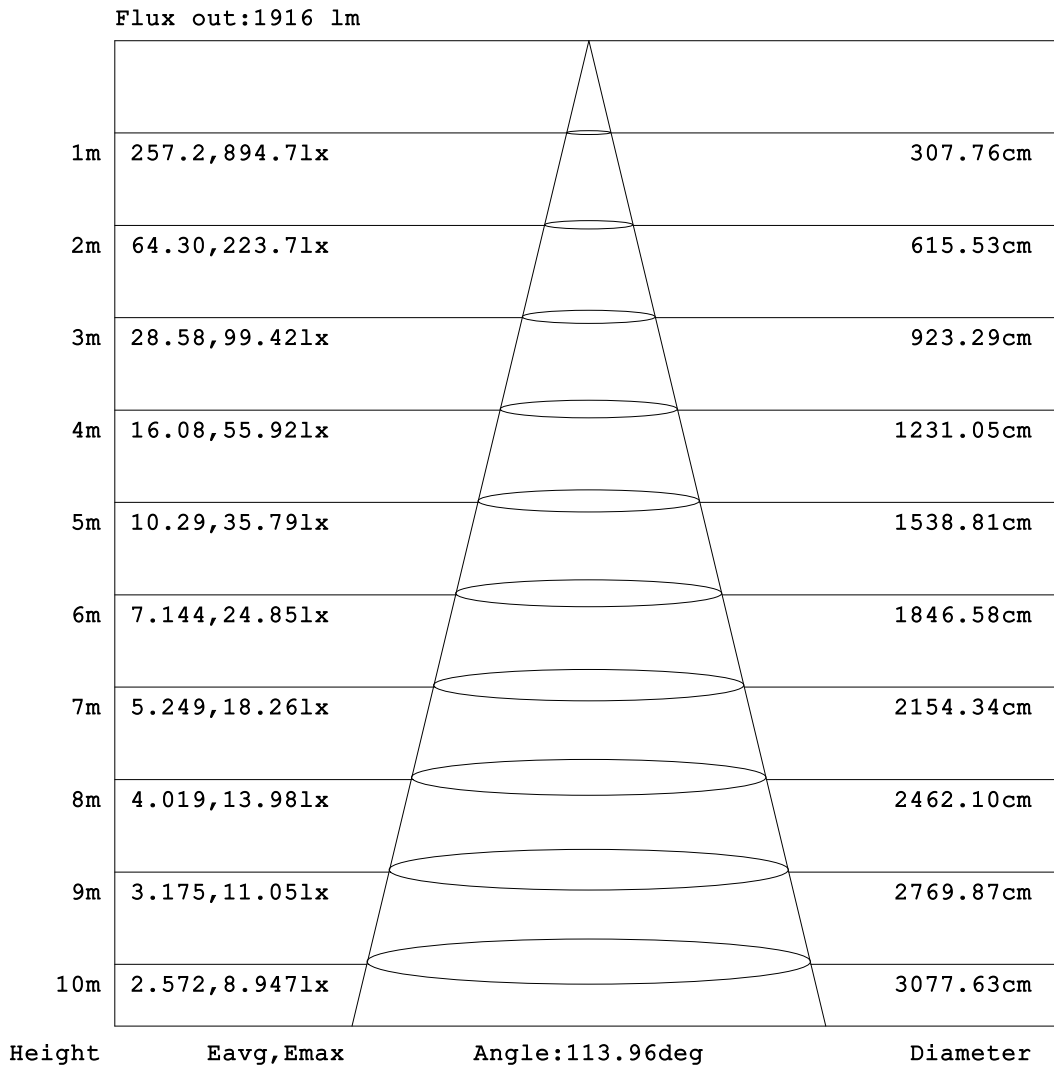


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:

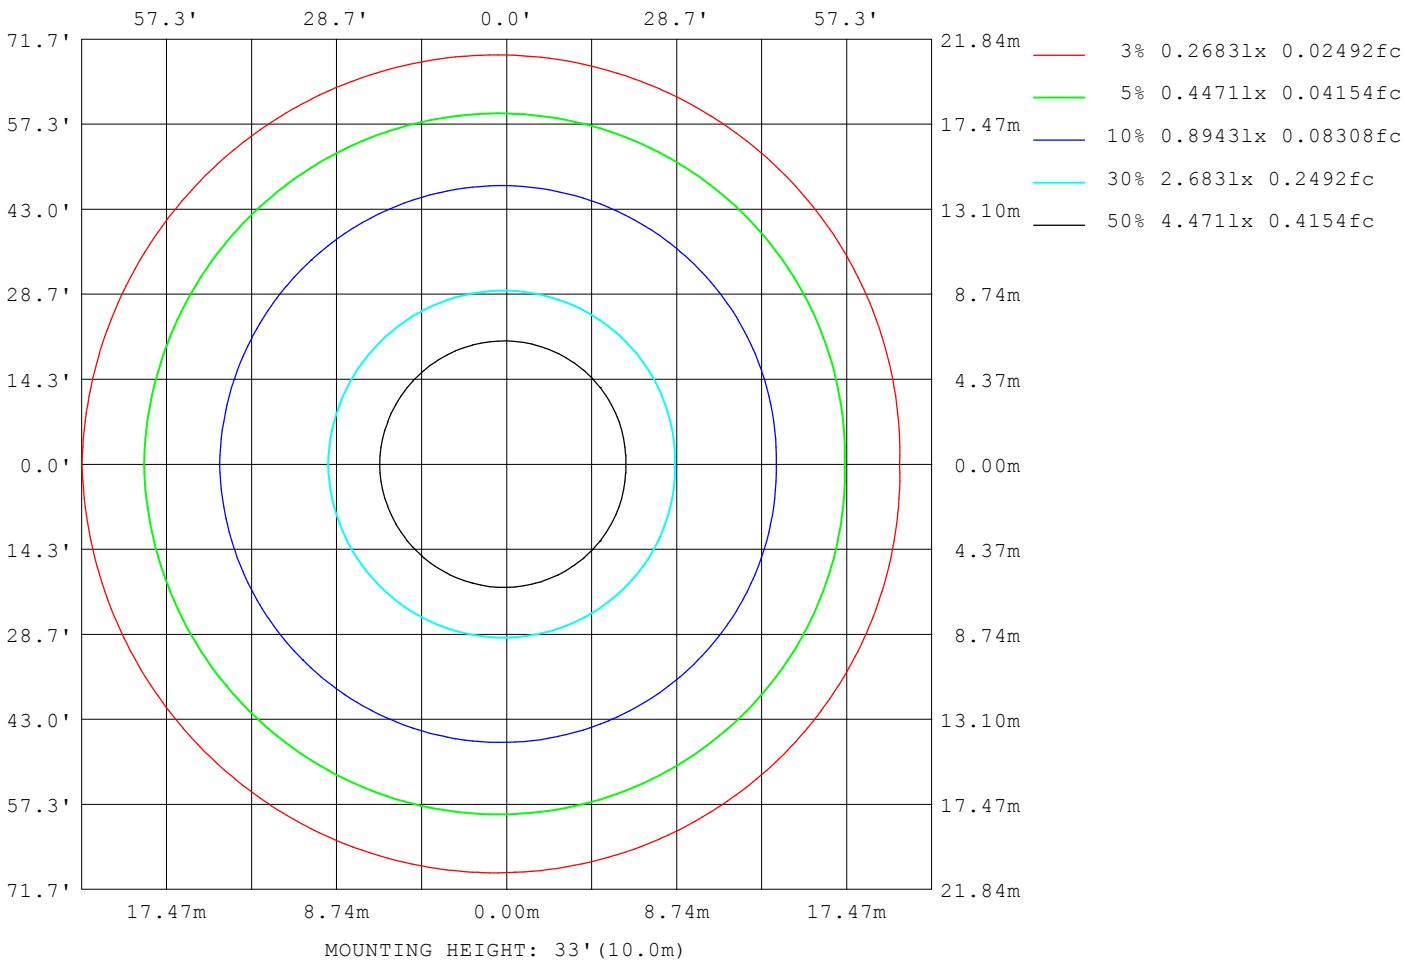

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8253
L_0~180 (75) av	7539
L_0~180 (85) av	6455
L_90~270 (65) av	8236
L_90~270 (75) av	7450
L_90~270 (85) av	6153
L_45 (65) av	8312
L_45 (75) av	7593
L_45 (85) av	6536

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

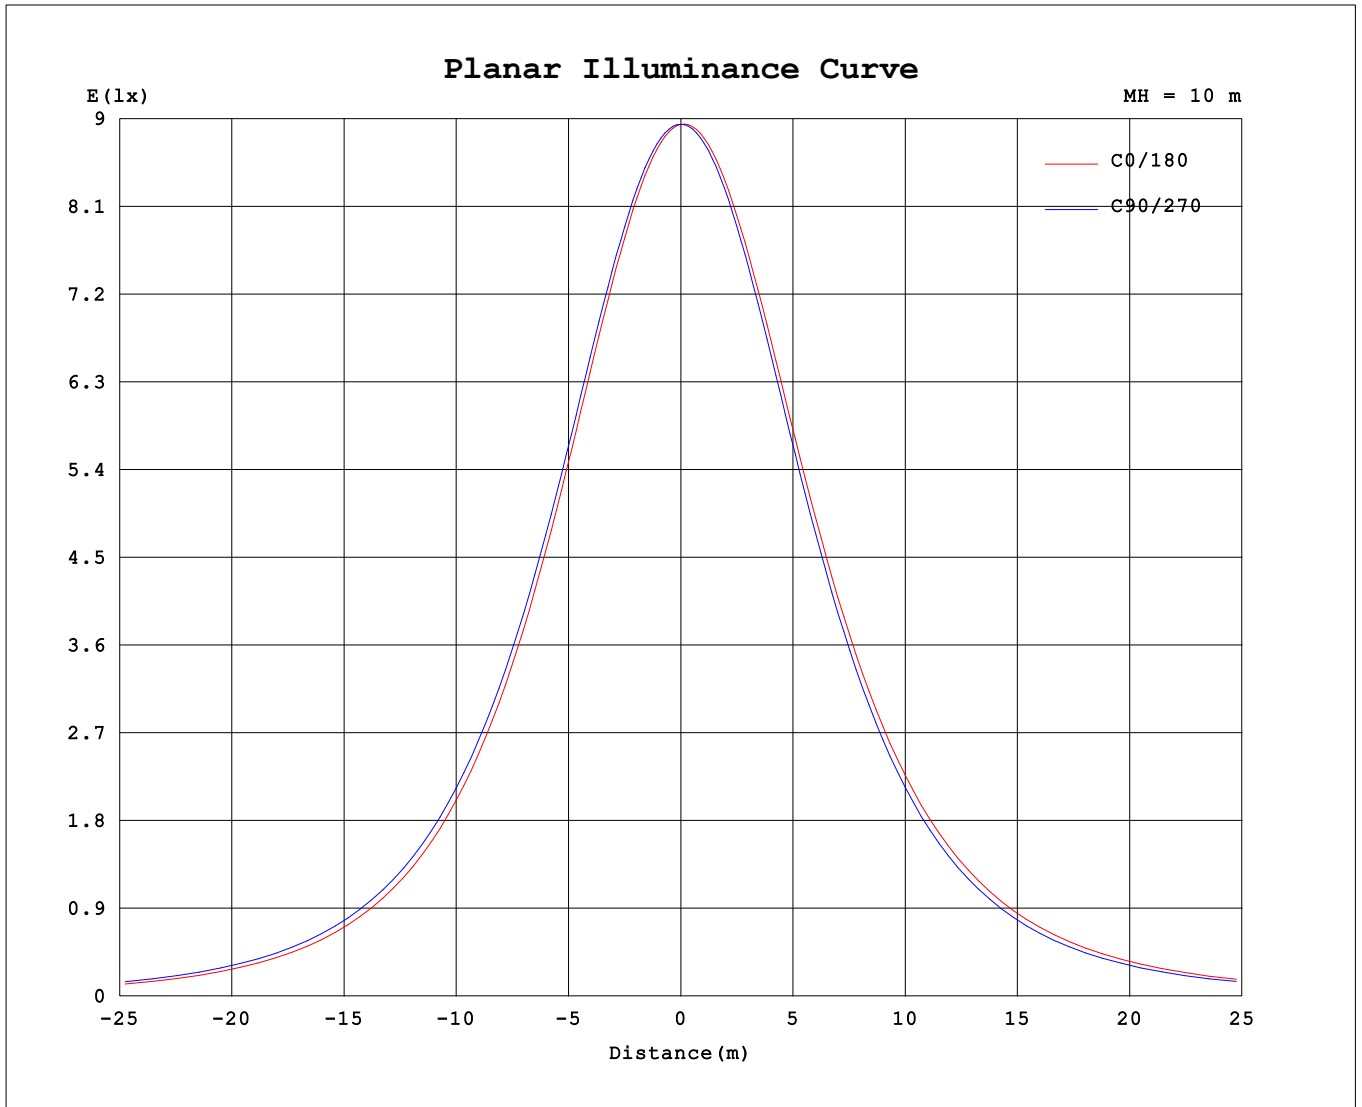

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.96V I:0.2206A P:26.058W PF:0.9849 Freq:59.98Hz Lamp Flux:2626.03x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 4000K
MFR.:	SUR.: 0.348	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	894	894	894	894															
5	886	891	895	891															
10	870	879	888	879															
15	847	860	874	861															
20	816	834	852	835															
25	779	801	823	802															
30	736	761	787	762															
35	686	715	745	716															
40	630	662	696	664															
45	569	604	641	606															
50	503	541	581	543															
55	434	474	517	476															
60	361	403	448	405															
65	287	330	376	332															
70	213	255	302	258															
75	142	182	228	184															
80	76.2	113	157	115															
85	17.6	49.8	89.3	52.1															
90	0.16	0.30	29.2	1.05															
95	0.24	0.33	0.41	0.33															
100	0.39	0.43	0.50	0.45															
105	0.55	0.54	0.63	0.60															
110	0.71	0.69	0.76	0.75															
115	0.88	0.85	0.88	0.90															
120	1.03	1.02	1.04	1.07															
125	1.17	1.17	1.19	1.24															
130	1.31	1.31	1.37	1.43															
135	1.44	1.44	1.53	1.57															
140	1.55	1.55	1.69	1.73															
145	1.67	1.66	1.82	1.87															
150	1.77	1.79	1.96	1.98															
155	1.89	1.89	2.09	2.10															
160	2.02	2.00	2.22	2.20															
165	2.14	2.11	2.34	2.32															
170	2.25	2.24	2.45	2.41															
175	2.34	2.34	2.52	2.48															
180	2.49	2.45	2.50	2.46															

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	894.3	894.3	894.3	894.3
3.0	890.3	893.0	895.7	893.1
6.0	883.5	888.9	894.5	888.9
9.0	873.8	882.0	890.3	882.3
12.0	861.8	872.4	883.4	872.9
15.0	846.9	860.1	873.9	860.8
18.0	829.5	845.2	861.8	846.1
21.0	809.6	828.0	846.9	828.7
24.0	787.3	808.1	829.5	808.8
27.0	762.6	785.6	809.5	786.8
30.0	735.5	761.1	787.3	762.2
33.0	706.4	733.9	762.5	735.3
36.0	674.8	704.9	735.6	706.3
39.0	641.5	673.4	706.3	674.9
42.0	606.0	640.0	675.0	641.5
45.0	568.6	604.1	641.4	606.2
48.0	529.7	567.1	605.8	569.0
51.0	489.6	528.2	568.7	530.2
54.0	447.7	487.6	529.9	490.1
57.0	404.6	445.9	489.4	448.1
60.0	361.0	402.7	447.8	405.2
63.0	316.7	358.7	405.1	361.5
66.0	272.0	314.4	361.3	317.0
69.0	227.9	269.6	317.0	272.3
72.0	184.3	225.3	272.5	228.4
75.0	142.4	181.9	228.4	184.5
78.0	102.1	139.6	184.9	142.5
81.0	63.71	99.44	142.8	102.3
84.0	28.44	61.79	102.2	64.25
87.0	0.5072	27.05	64.25	29.16
90.0	0.1603	0.3037	29.15	1.048
93.0	0.1876	0.3149	0.5780	0.3204
96.0	0.2703	0.3372	0.4312	0.3534
99.0	0.3587	0.3980	0.4864	0.4251
102.0	0.4527	0.4698	0.5529	0.5080
105.0	0.5522	0.5417	0.6303	0.5964
108.0	0.6461	0.6246	0.7131	0.6793
111.0	0.7510	0.7240	0.7849	0.7678
114.0	0.8396	0.8124	0.8731	0.8781
117.0	0.9334	0.9229	0.9506	0.9666
120.0	1.027	1.017	1.039	1.072
123.0	1.121	1.111	1.133	1.182
126.0	1.199	1.194	1.232	1.281
129.0	1.281	1.282	1.338	1.386
132.0	1.353	1.359	1.431	1.480
135.0	1.436	1.437	1.525	1.574
138.0	1.514	1.503	1.625	1.674
141.0	1.569	1.575	1.719	1.746
144.0	1.646	1.641	1.802	1.834
147.0	1.707	1.713	1.873	1.906
150.0	1.773	1.790	1.956	1.983
153.0	1.851	1.845	2.034	2.055
156.0	1.917	1.912	2.116	2.132
159.0	2.005	1.989	2.194	2.182
162.0	2.072	2.044	2.271	2.248
165.0	2.144	2.111	2.343	2.320
168.0	2.232	2.183	2.415	2.375
171.0	2.265	2.265	2.476	2.420
174.0	2.315	2.326	2.509	2.469
177.0	2.392	2.365	2.520	2.492
180.0	2.486	2.447	2.503	2.464

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-12-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks: