


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm		
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 50.04 lm/W
MODEL		Imax (cd)	365.5	S/MH (C0/180)	17.97	
NOMINAL POWER(W)		LOR (%)	100.0	S/MH (C90/270)	18.38	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2288.4	η UP,DN (C0-180)	23.7,25.5	
NOMINAL FLUX(lm)	2288.43	CIE CLASS	DIFFUSE	η UP,DN (C180-360)	24.7,26.0	
LAMPS INSIDE	1	η up (%)	48.4	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	120	η down (%)	51.6	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

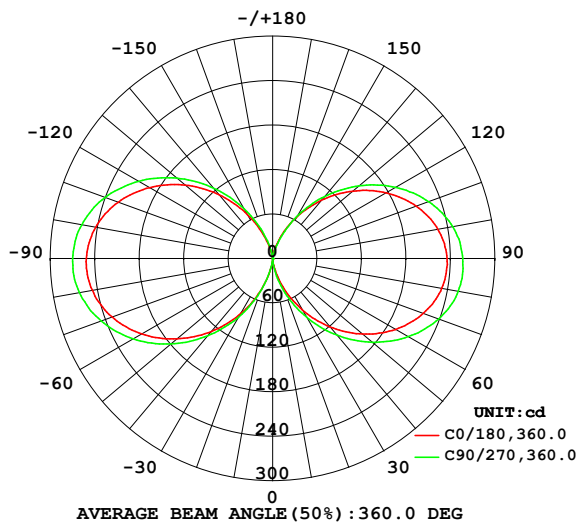

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

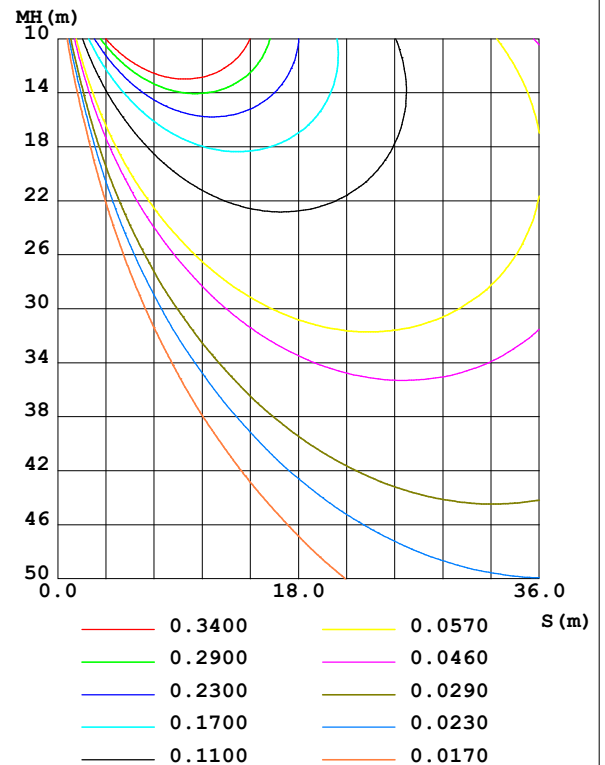

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	10.04	11.65	15.33	15.04	11.62	9.154	9.468	16.80	0- 10	0.5303	0.5303	0.02,0.02
20	40.45	40.44	49.73	64.85	43.94	40.79	45.26	63.47	10- 20	8.503	9.033	0.39,0.39
30	80.08	77.95	91.57	127.3	85.65	81.03	90.73	124.3	20- 30	32.30	41.34	1.81,1.81
40	120.8	116.6	135.1	190.8	128.5	122.0	136.3	186.9	30- 40	71.66	113.0	4.94,4.94
50	158.9	152.9	176.0	250.2	168.9	160.5	179.8	245.2	40- 50	121.9	234.9	10.3,10.3
60	191.9	183.5	211.2	296.4	203.7	193.2	217.3	293.1	50- 60	176.1	411.0	18,18
70	216.6	204.9	238.7	333.5	230.8	215.7	246.4	331.7	60- 70	225.9	637.0	27.8,27.8
80	231.6	218.4	254.3	357.8	247.1	229.8	265.1	356.5	70- 80	262.0	899.0	39.3,39.3
90	235.3	222.3	256.5	365.5	251.3	234.0	269.8	363.5	80- 90	281.1	1180	51.6,51.6
100	226.6	213.3	247.1	351.8	242.7	225.4	261.5	350.6	90-100	278.8	1459	63.7,63.7
110	206.3	193.9	224.4	321.9	222.1	205.8	240.9	321.0	100-110	254.1	1713	74.9,74.9
120	177.2	165.9	192.2	280.3	191.6	177.3	208.7	278.9	110-120	213.5	1926	84.2,84.2
130	141.6	132.5	152.5	224.9	154.1	144.3	168.8	225.2	120-130	162.7	2089	91.3,91.3
140	102.7	97.01	109.2	163.4	112.2	107.4	124.0	164.2	130-140	108.9	2198	96.1,96.1
150	64.14	59.15	65.36	101.1	68.78	66.02	77.61	101.5	140-150	60.66	2259	98.7,98.7
160	29.79	24.69	26.03	46.16	28.58	28.75	35.71	43.70	150-160	24.55	2283	99.8,99.8
170	5.192	4.323	2.883	7.342	2.703	3.132	4.766	3.639	160-170	4.975	2288	100,100
180	0.2368	0.2420	0.2494	0.3799	0.2388	0.2444	0.2589	0.3585	170-180	0.1299	2288	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 167.23 lm

%lum = 7.3%

%lamp = 7.3%

Conical surface Flux(120deg): 411.03 lm

%lum = 18.0%


%lamp = 18.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Dano
 Test Date:2023-07-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:2.900m [K=0.8810]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm		
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

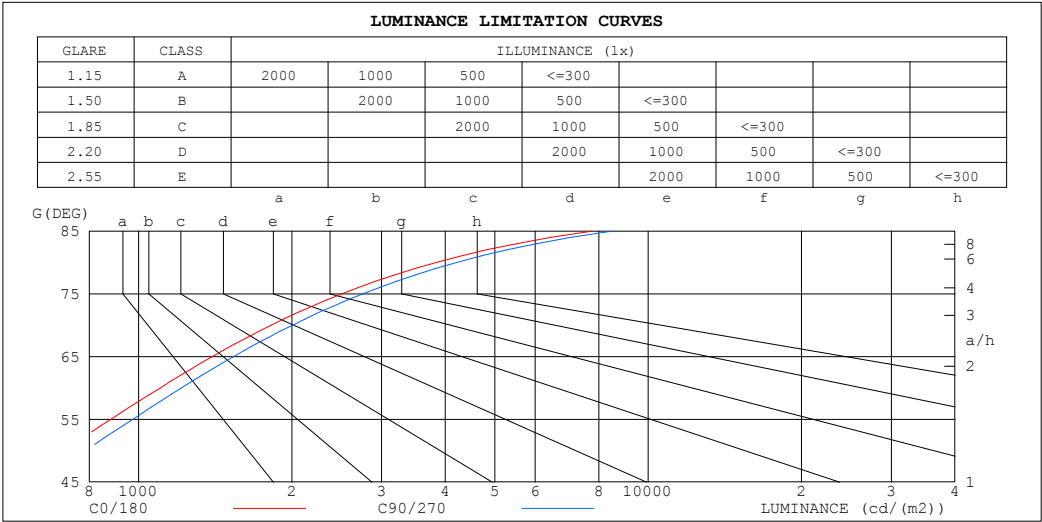

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7756	8477
80	3835	4205
75	2505	2755
70	1820	2005
65	1396	1537
60	1103	1213
55	882	974
50	710	786
45	570	633


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm		
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	30%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

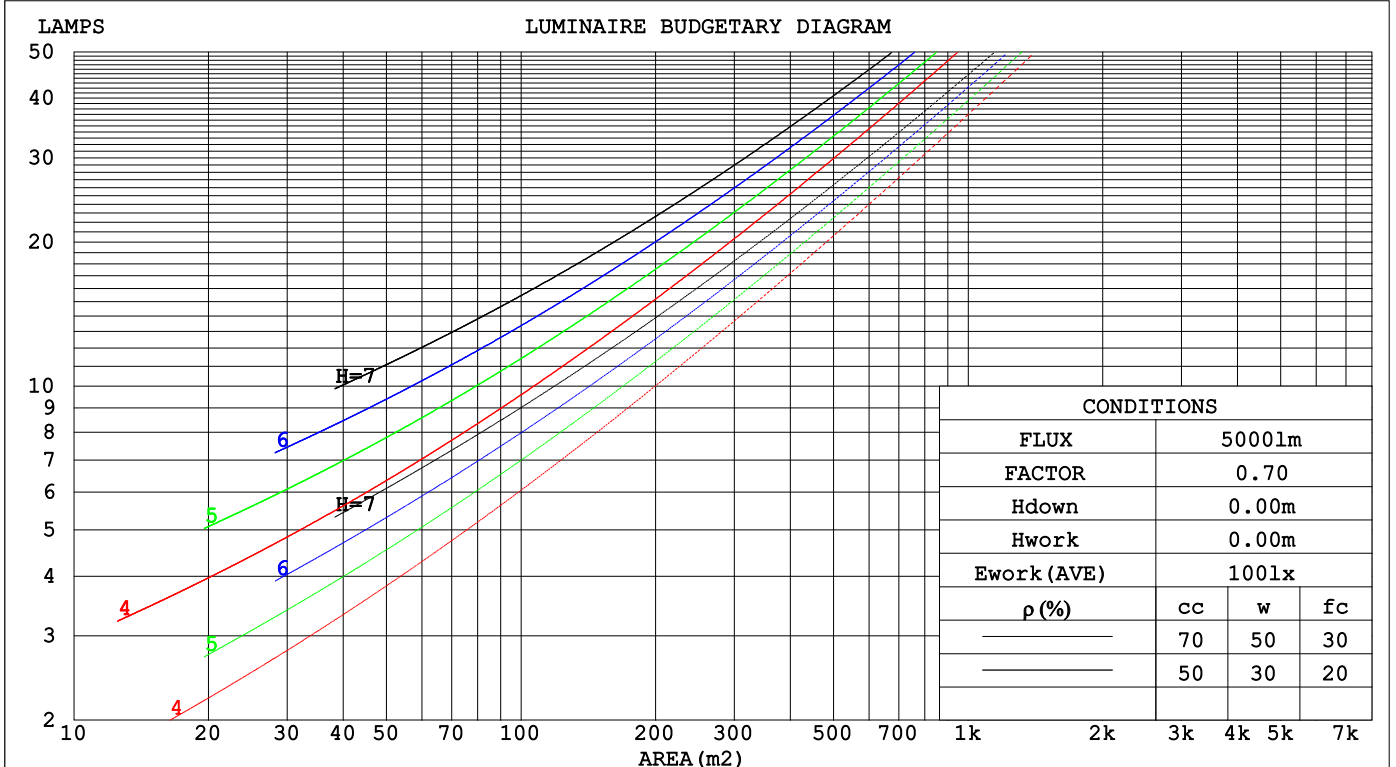

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm		
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	30%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.353 .204 .065	.433 .247 .078	.391 .225 .072	.353 .204 .065	.318 .185 .059	
2.0	.279 .156 .049	.352 .194 .060	.314 .174 .054	.279 .156 .049	.247 .139 .044	
3.0	.235 .129 .039	.302 .161 .049	.267 .145 .044	.235 .129 .039	.205 .114 .035	
4.0	.204 .109 .033	.265 .139 .041	.233 .124 .037	.204 .109 .033	.176 .096 .029	
5.0	.181 .095 .028	.237 .122 .035	.208 .108 .032	.181 .095 .028	.155 .083 .025	
6.0	.163 .084 .025	.215 .108 .031	.188 .096 .028	.163 .084 .025	.139 .073 .022	
7.0	.148 .076 .022	.196 .098 .028	.171 .087 .025	.148 .076 .022	.126 .065 .019	
8.0	.136 .069 .020	.180 .089 .025	.157 .079 .022	.136 .069 .020	.115 .059 .017	
9.0	.125 .063 .018	.167 .081 .023	.146 .072 .020	.125 .063 .018	.106 .054 .016	
10.0	.117 .058 .016	.156 .075 .021	.136 .066 .019	.117 .058 .016	.099 .050 .014	

pcc	30%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.187 .187 .187	.478 .478 .478	.326 .326 .326	.187 .187 .187	.060 .060 .060	
1.0	.189 .180 .171	.481 .452 .426	.329 .311 .295	.189 .180 .171	.061 .058 .055	
2.0	.189 .175 .164	.477 .436 .400	.327 .301 .279	.189 .175 .164	.061 .057 .053	
3.0	.187 .172 .159	.472 .424 .385	.324 .294 .270	.187 .172 .159	.060 .056 .052	
4.0	.185 .169 .156	.466 .415 .375	.321 .289 .264	.185 .169 .156	.060 .055 .051	
5.0	.184 .167 .154	.460 .408 .368	.317 .285 .260	.184 .167 .154	.059 .055 .051	
6.0	.182 .165 .153	.454 .402 .364	.313 .281 .257	.182 .165 .153	.059 .054 .051	
7.0	.180 .164 .152	.448 .397 .360	.310 .278 .255	.180 .164 .152	.058 .054 .050	
8.0	.178 .163 .151	.443 .393 .358	.306 .276 .254	.178 .163 .151	.058 .053 .050	
9.0	.177 .161 .151	.438 .389 .356	.303 .273 .253	.177 .161 .151	.057 .053 .050	
10.0	.175 .160 .150	.433 .386 .354	.300 .271 .252	.175 .160 .150	.057 .053 .050	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm										
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.1	11.4	10.9	13.2	15.6	9.8	12.0	11.5	13.9	16.2
3H	13.0	15.0	14.8	16.9	19.3	13.5	15.6	15.3	17.5	19.9
4H	15.0	16.9	16.8	18.8	21.3	15.5	17.4	17.3	19.3	21.8
6H	17.1	19.0	19.0	20.9	23.4	17.6	19.5	19.5	21.4	23.9
8H	18.3	20.0	20.1	22.0	24.5	18.8	20.6	20.6	22.5	25.0
12H	19.6	21.3	21.4	23.2	25.8	20.1	21.8	22.0	23.8	26.3
4H 2H	9.9	11.9	11.7	13.8	16.2	10.4	12.4	12.2	14.3	16.7
3H	13.8	15.6	15.7	17.5	20.0	14.3	16.0	16.1	17.9	20.5
4H	15.9	17.5	17.8	19.5	22.0	16.3	17.9	18.2	19.9	22.4
6H	18.2	19.7	20.1	21.7	24.2	18.6	20.1	20.5	22.0	24.6
8H	19.5	20.8	21.4	22.8	25.4	19.9	21.2	21.8	23.2	25.8
12H	20.9	22.1	22.8	24.2	26.8	21.3	22.6	23.3	24.6	27.2
8H 4H	16.6	17.9	18.5	19.9	22.5	16.9	18.3	18.9	20.3	22.9
6H	19.1	20.3	21.1	22.3	25.0	19.5	20.6	21.4	22.7	25.3
8H	20.6	21.6	22.5	23.6	26.3	20.9	21.9	22.9	24.0	26.6
12H	22.2	23.1	24.2	25.2	27.9	22.5	23.5	24.5	25.5	28.2
12H 4H	16.8	18.0	18.7	20.0	22.7	17.1	18.4	19.1	20.4	23.0
6H	19.4	20.5	21.4	22.5	25.2	19.7	20.8	21.7	22.8	25.5
8H	21.0	21.9	23.0	24.0	26.7	21.3	22.2	23.3	24.3	27.0
CIE190: 2010										

CIE190: 2010
Area: 0.36 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm		
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	33	20	12	31	19	12	28	17	11	3
0.80	41	26	18	39	25	17	34	22	15	6
1.00	48	33	23	45	31	22	39	30	20	8
1.25	55	40	30	51	37	28	44	33	25	11
1.50	61	45	35	56	43	33	48	37	29	14
2.00	69	54	44	63	51	41	54	44	36	18
2.50	74	61	51	68	57	47	58	48	41	21
3.00	78	66	56	72	61	53	61	52	45	24
4.00	84	73	65	77	68	60	65	58	52	28
5.00	88	78	70	81	73	65	68	62	56	31
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2℃
 Operators: Dano
 Test Date: 2023-07-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 2.900m [K=0.8810]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm		
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

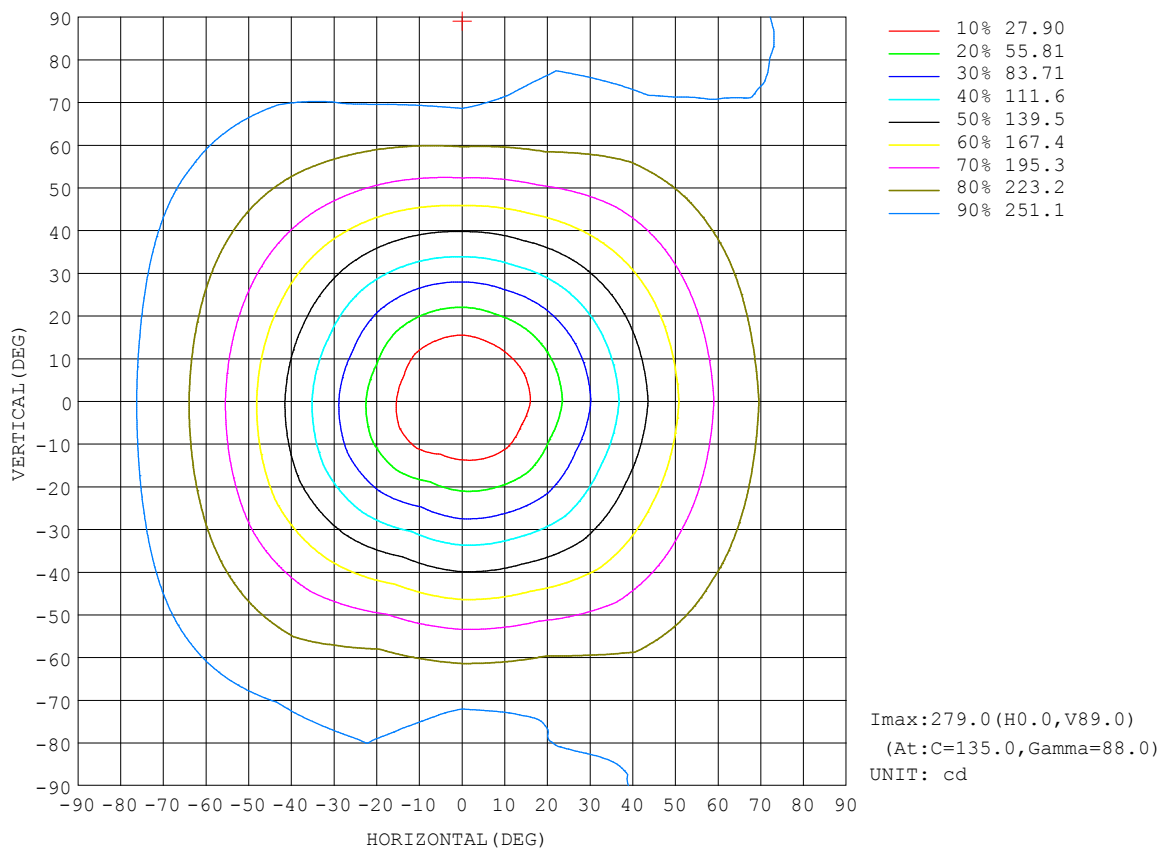


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

AAI Figure

Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm		
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

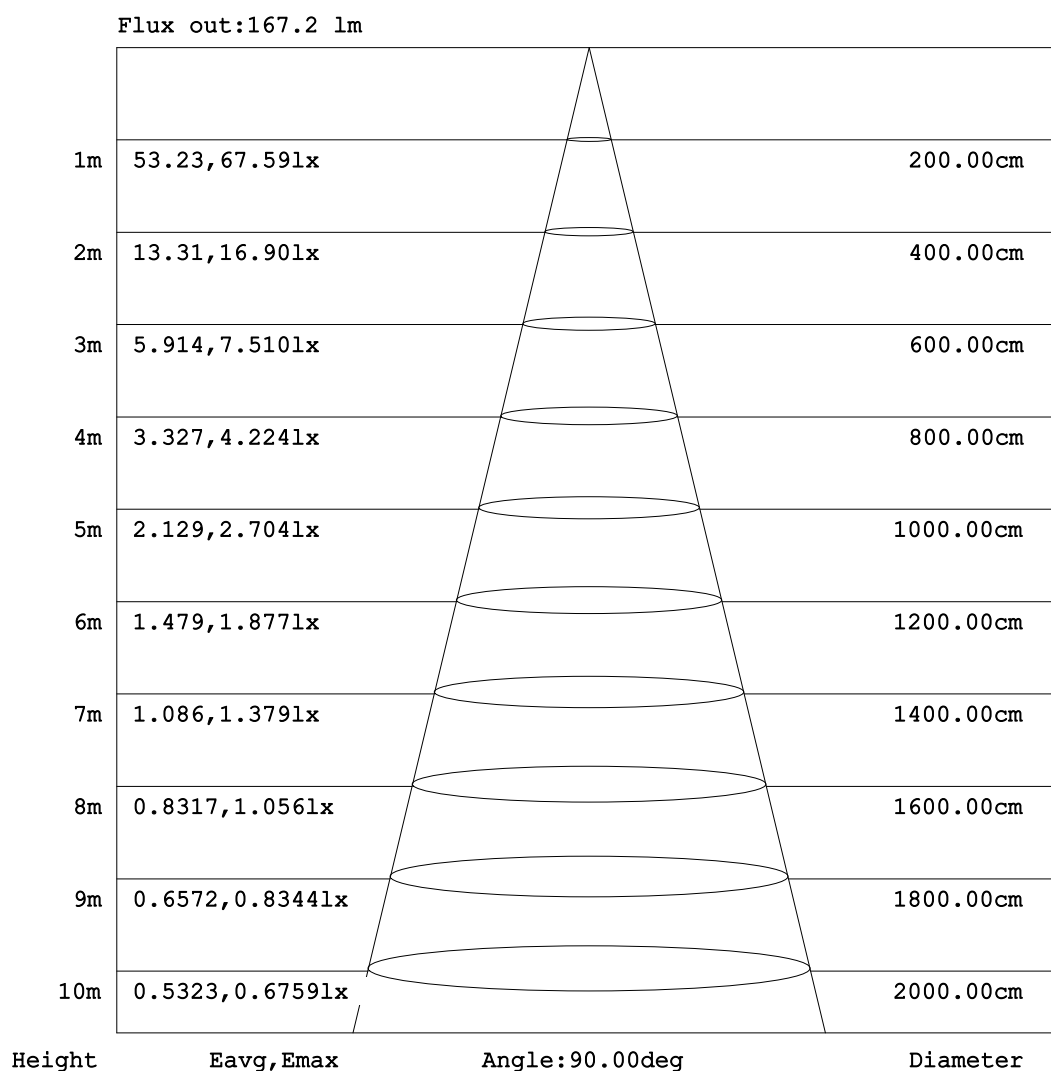


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

ISOLUX DIAGRAM


Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm		
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

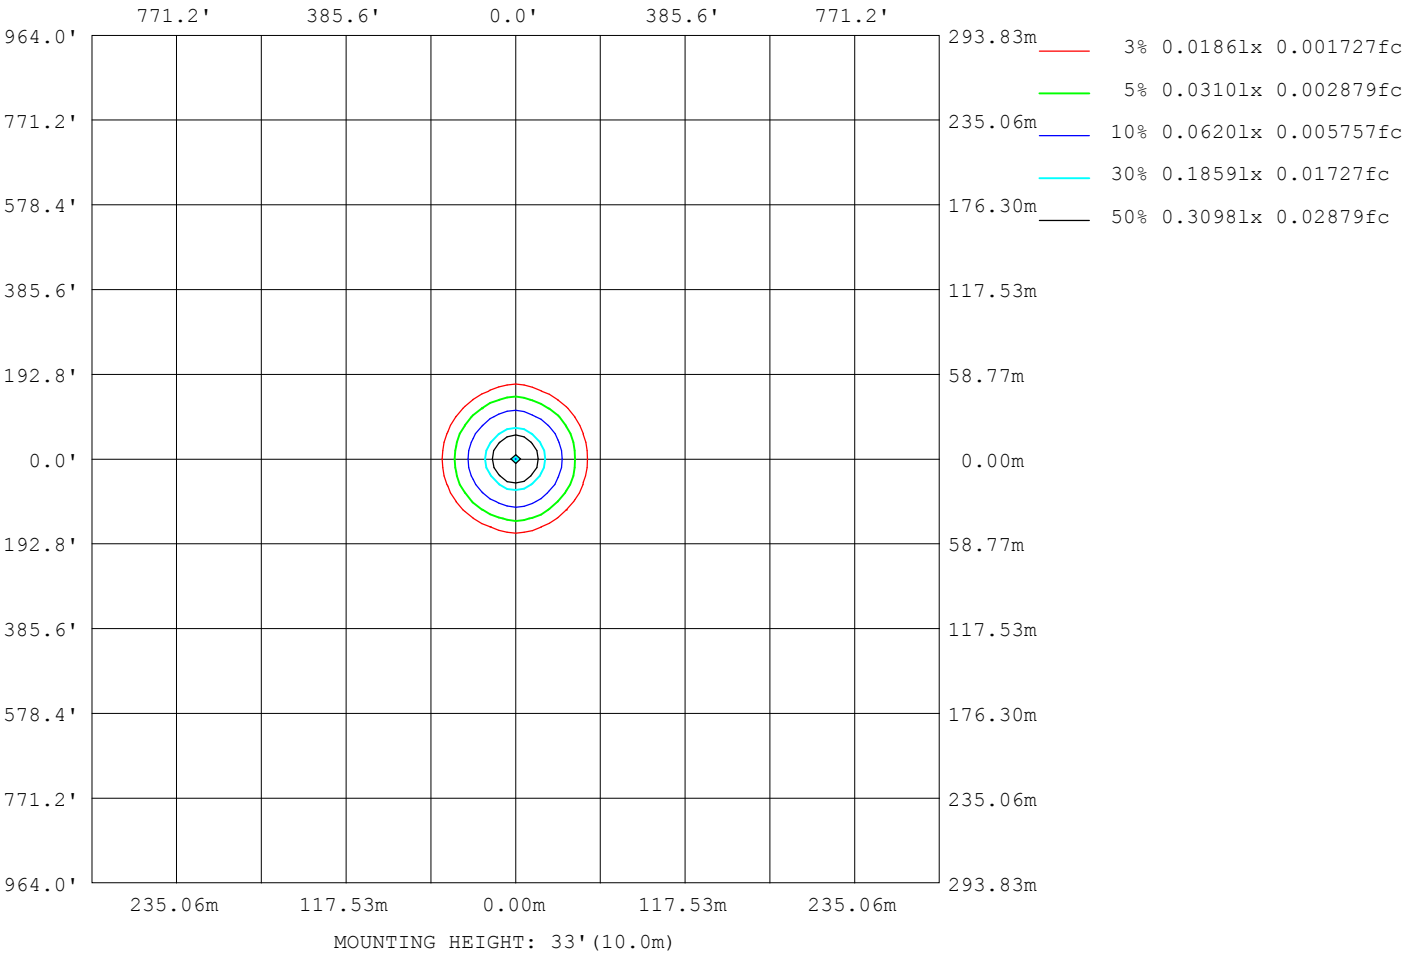

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

Planar Illuminance Curve

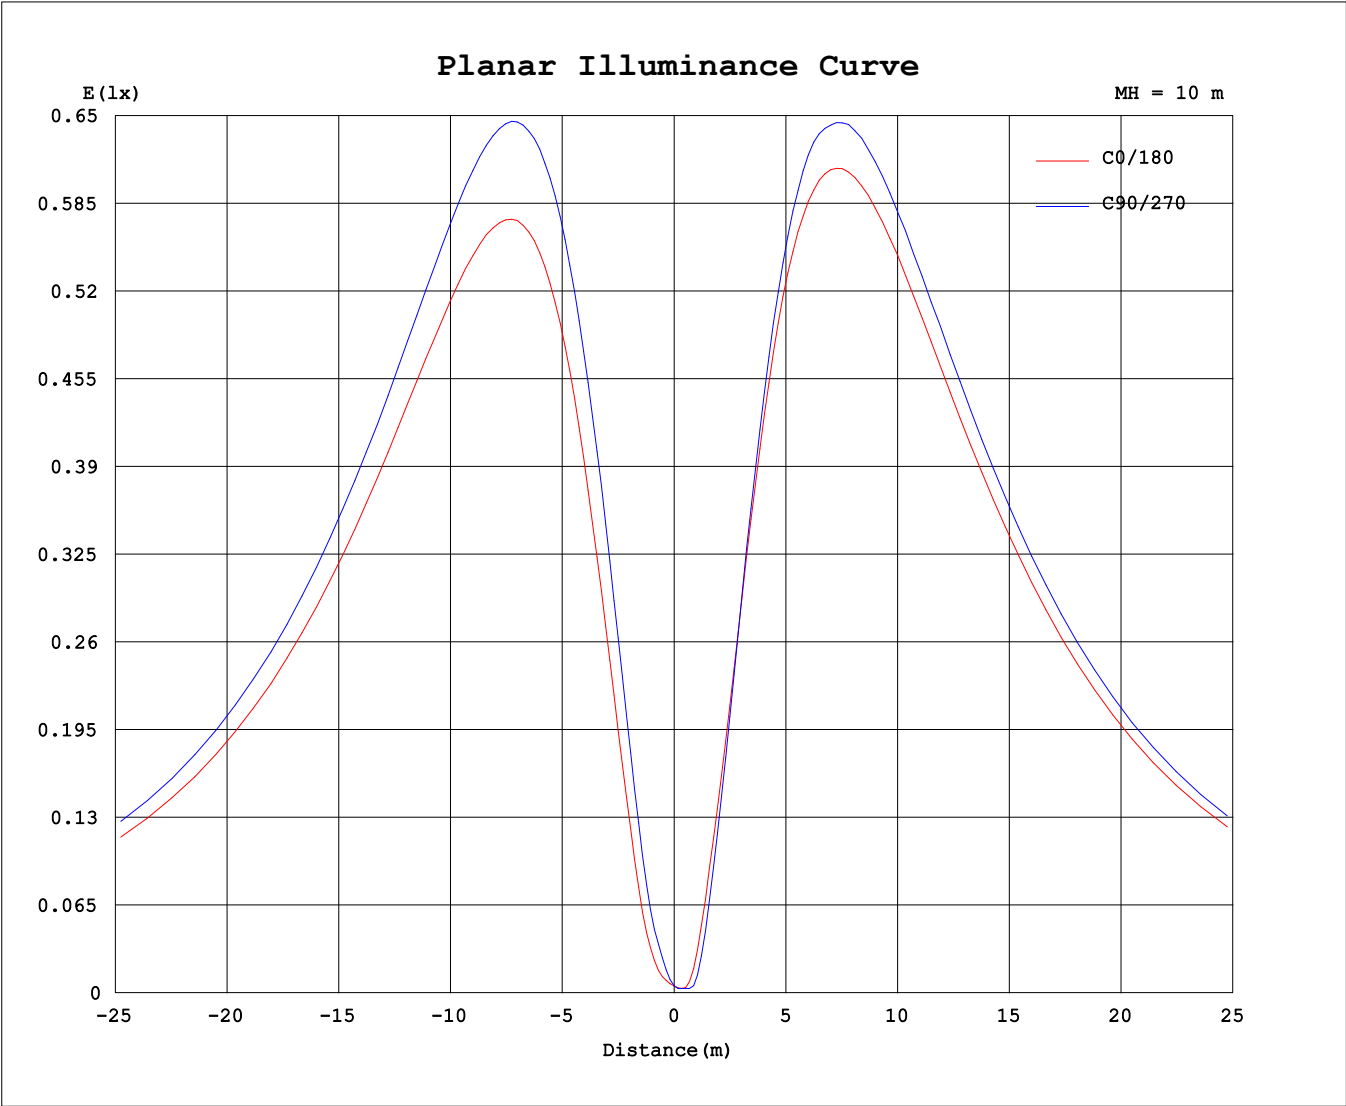

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.3835A P:45.73W PF:0.9936 Freq:60.01Hz Lamp Flux:2288.43x1 lm		
NAME: A02-CL30P-16-8X6S-952C5-MVTD-BK 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51	0.51			
5	2.36	3.19	4.43	4.91	4.64	4.09	2.76	1.44	1.80	1.15	0.75	0.65	0.54	0.70	2.90	2.36			
10	10.0	10.9	11.6	13.0	15.3	16.9	15.0	10.54	11.6	10.5	9.15	9.12	9.47	11.0	16.8	11.4			
15	23.7	24.4	24.4	27.3	31.2	35.2	37.5	27.9	25.8	24.8	23.0	24.2	25.3	28.6	37.5	28.0			
20	40.5	40.5	40.4	44.7	49.7	56.6	64.9	49.3	43.9	42.2	40.8	42.6	45.3	49.9	63.5	48.9			
25	59.8	58.3	58.8	64.1	70.0	79.8	95.5	73.3	64.4	61.1	60.5	63.0	67.4	73.3	93.1	72.1			
30	80.1	76.8	77.9	84.6	91.6	104	127	98.5	85.6	80.7	81.0	84.3	90.7	97.7	124	96.5			
35	101	95.3	97.3	106	114	127	159	124	107	99.8	102	106	113	121	156	121			
40	121	114	117	126	135	151	191	149	128	119	122	127	136	145	187	146			
45	140	131	135	146	156	173	221	174	149	137	142	147	158	168	217	169			
50	159	148	153	165	176	194	250	197	169	155	160	167	180	191	245	192			
55	176	163	169	183	195	214	275	218	187	172	178	185	199	211	271	212			
60	192	177	183	199	211	231	296	238	204	186	193	201	217	230	293	231			
65	205	190	195	213	226	245	316	256	218	199	206	216	233	244	314	248			
70	217	200	205	224	239	250	334	270	231	210	216	227	246	250	332	262			
75	226	208	213	228	248	252	348	283	240	219	224	234	257	255	346	273			
80	232	214	218	228	254	260	358	291	247	224	230	234	265	263	356	281			
85	235	216	222	232	257	265	364	296	251	228	233	235	269	270	362	286			
90	235	217	222	234	256	267	365	296	251	228	234	238	270	274	364	286			
95	233	214	219	230	254	262	361	293	249	226	231	235	268	272	359	283			
100	227	209	213	222	247	255	352	286	243	222	225	227	262	265	351	277			
105	218	201	205	211	237	252	339	277	234	213	217	216	253	258	338	267			
110	206	191	194	199	224	244	322	264	222	203	206	205	241	252	321	254			
115	193	178	181	188	209	228	303	248	208	191	192	198	226	240	301	239			
120	177	164	166	179	192	210	280	230	192	176	177	190	209	222	279	221			
125	160	148	149	167	173	189	254	209	173	160	161	176	189	203	253	201			
130	142	131	133	150	153	167	225	187	154	142	144	158	169	181	225	179			
135	122	113	115	130	131	144	194	163	133	124	127	138	147	158	195	156			
140	103	94.3	97.0	110	109	120	163	139	112	105	107	117	124	134	164	132			
145	83.0	75.6	78.1	88.4	87.5	95.8	132	114	90.5	85.1	86.7	96.2	101	110	133	108			
150	64.1	57.3	59.1	67.2	65.4	72.0	101	88.8	68.8	65.0	66.0	74.4	77.6	85.8	101	83.0			
155	46.3	39.9	41.1	46.7	44.4	49.2	72.5	63.8	47.8	45.3	46.2	52.9	55.3	61.5	71.1	58.6			
160	29.8	24.2	24.7	27.9	26.0	28.8	46.2	40.2	28.6	27.0	28.8	32.7	35.7	38.6	43.7	35.7			
165	15.8	12.4	11.4	12.3	11.6	12.9	24.0	19.8	13.3	12.1	13.6	15.7	18.0	19.1	19.9	16.3			
170	5.19	5.13	4.32	2.77	2.88	4.10	7.34	4.46	2.70	2.47	3.13	3.93	4.77	5.52	3.64	2.67			
175	0.46	0.64	0.50	0.25	0.25	0.28	0.45	0.31	0.26	0.23	0.25	0.24	0.26	0.26	0.36	0.28			
180	0.24	0.23	0.24	0.25	0.25	0.27	0.38	0.29	0.24	0.22	0.24	0.24	0.26	0.27	0.36	0.31			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks: