


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm		
NAME: IDRC16LAJUDSB 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 58.64 lm/W
MODEL		I _{max} (cd)	355.2	S/MH (C0/180)	21.86	
NOMINAL POWER(W)		LOR (%)	100.0	S/MH (C90/270)	20.22	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2656.9	η UP,DN (C0-180)	24.6,25.7	
NOMINAL FLUX(lm)	2656.91	CIE CLASS	DIFFUSE	η UP,DN (C180-360)	24.2,25.6	
LAMPS INSIDE	1	η up (%)	48.8	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	120	η down (%)	51.2	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

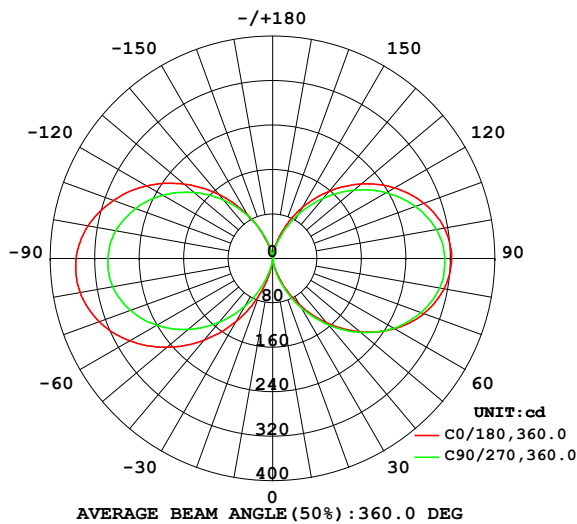

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

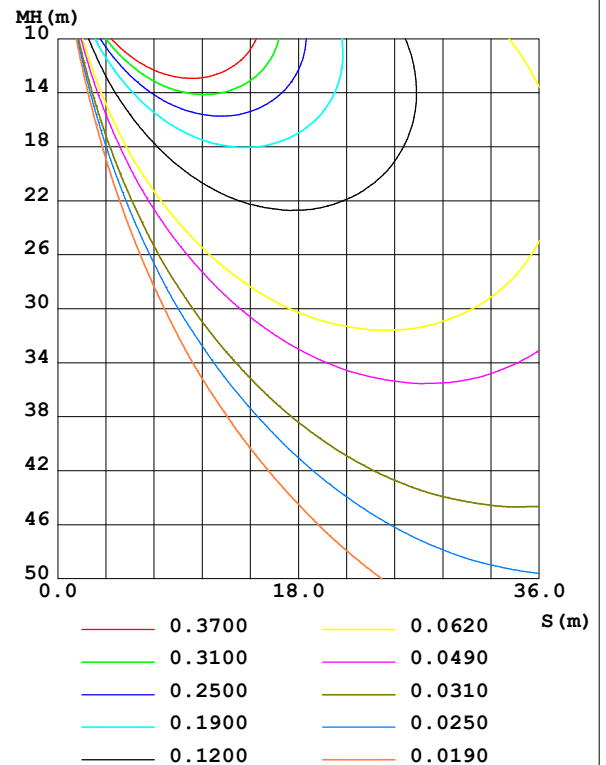

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2℃
Operators: Dano
Test Date: 2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 2.900m [K=0.8810]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	5.976	5.429	10.25	14.75	18.25	15.83	9.402	5.995	0- 10	0.4137	0.4137	0.02,0.02
20	42.65	41.80	49.88	58.95	69.06	58.02	47.77	39.20	10- 20	8.764	9.178	0.35,0.35
30	95.10	92.64	101.5	114.4	130.1	111.1	98.68	87.27	20- 30	35.82	45.00	1.69,1.69
40	151.5	145.8	155.8	170.9	191.7	164.7	150.0	137.2	30- 40	81.50	126.5	4.76,4.76
50	205.4	194.2	207.3	223.3	248.7	212.5	198.8	185.3	40- 50	140.3	266.8	10,10
60	253.0	234.5	251.6	267.0	296.8	254.9	240.6	227.4	50- 60	203.5	470.2	17.7,17.7
70	290.1	267.4	284.5	296.5	332.5	287.8	272.5	258.6	60- 70	260.9	731.1	27.5,27.5
80	313.5	289.2	305.2	313.6	351.8	307.4	292.4	277.2	70- 80	304.0	1035	39,39
90	321.8	296.7	309.7	316.7	353.7	311.0	296.4	284.4	80- 90	326.1	1361	51.2,51.2
100	313.9	287.4	299.5	302.1	337.4	296.6	286.9	276.1	90-100	322.6	1684	63.4,63.4
110	290.0	264.0	273.8	273.2	305.1	269.3	262.5	256.1	100-110	293.7	1978	74.4,74.4
120	253.9	231.0	236.9	233.8	261.6	234.4	227.8	224.3	110-120	248.9	2226	83.8,83.8
130	208.8	190.1	191.4	189.5	208.4	191.1	184.7	186.6	120-130	190.3	2417	91,91
140	157.5	142.2	141.2	137.9	150.3	139.7	137.2	141.1	130-140	128.7	2545	95.8,95.8
150	104.8	93.11	90.53	85.73	90.74	85.78	88.18	91.57	140-150	73.15	2619	98.6,98.6
160	53.12	45.83	42.11	37.38	37.03	35.58	42.50	43.65	150-160	31.02	2650	99.7,99.7
170	13.25	10.96	7.174	4.700	3.418	2.752	8.400	9.652	160-170	7.014	2657	100,100
180	0.8723	0.2989	0.6726	0.3054	0.7878	0.3002	0.3011	0.3756	170-180	0.2721	2657	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 188.77 lm

%lum = 7.1%

%lamp = 7.1%

Conical surface Flux(120deg): 470.25 lm

%lum = 17.7%


%lamp = 17.7%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm		
NAME: IDRC16LAJUDSB 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

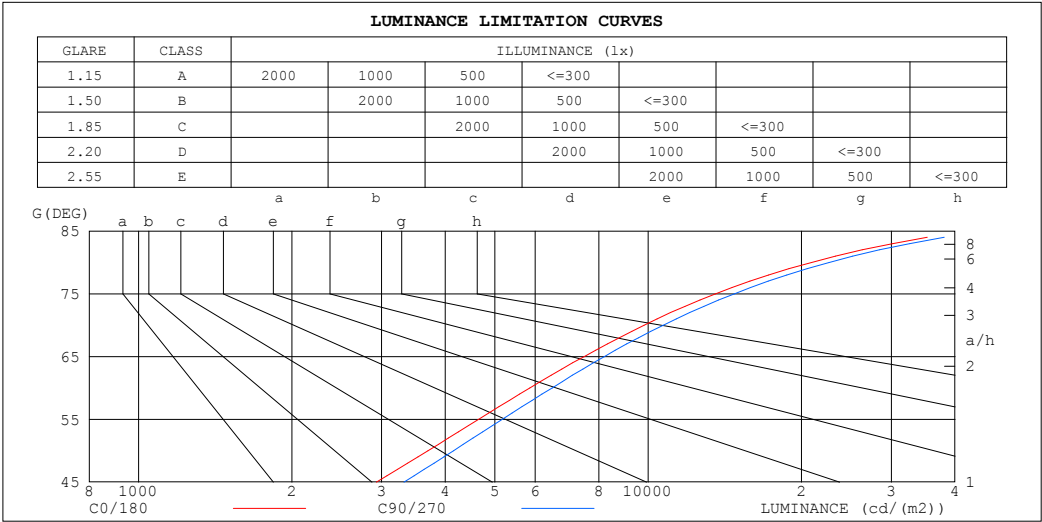

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	42481	45726
80	20901	22625
75	13557	14747
70	9821	10709
65	7485	8198
60	5860	6480
55	4650	5172
50	3700	4153
45	2929	3316


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm		
NAME: IDRC16LAJUDSB 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	30%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

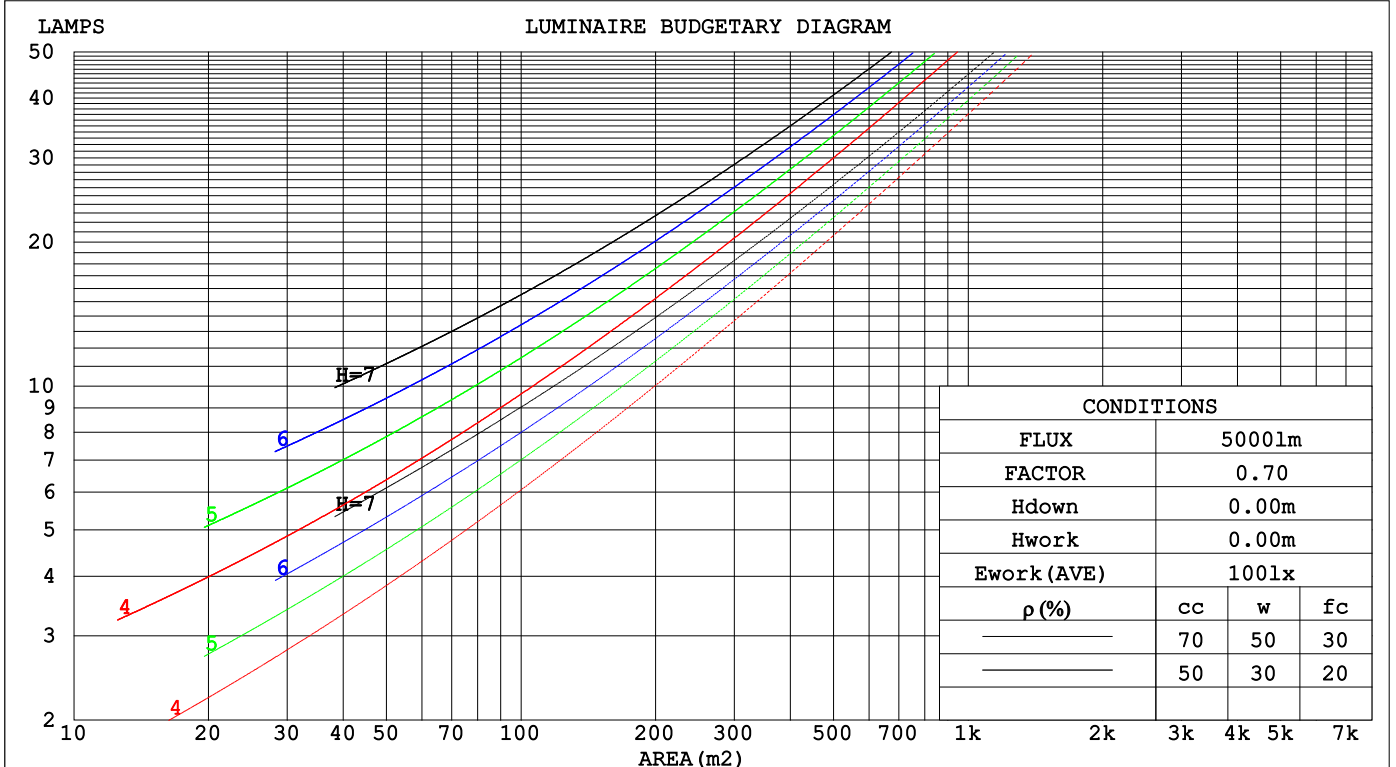

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm		
NAME: IDRC16LAJUDSB 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	30%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.353 .204 .065	.433 .247 .078	.391 .224 .072	.353 .204 .065	.318 .184 .059	
2.0	.278 .156 .049	.351 .194 .060	.313 .174 .054	.278 .156 .049	.246 .139 .044	
3.0	.234 .128 .039	.301 .161 .049	.266 .144 .044	.234 .128 .039	.204 .113 .035	
4.0	.203 .109 .033	.265 .139 .041	.233 .124 .037	.203 .109 .033	.176 .096 .029	
5.0	.180 .095 .028	.237 .122 .035	.208 .108 .032	.180 .095 .028	.155 .083 .025	
6.0	.162 .084 .025	.214 .108 .031	.187 .096 .028	.162 .084 .025	.138 .073 .022	
7.0	.147 .076 .022	.196 .098 .028	.171 .086 .025	.147 .076 .022	.125 .065 .019	
8.0	.135 .069 .020	.180 .089 .025	.157 .078 .022	.135 .069 .020	.115 .059 .017	
9.0	.125 .063 .018	.167 .081 .023	.145 .072 .020	.125 .063 .018	.106 .054 .016	
10.0	.116 .058 .016	.156 .075 .021	.135 .066 .019	.116 .058 .016	.098 .049 .014	

pcc	30%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.188 .188 .188	.480 .480 .480	.328 .328 .328	.188 .188 .188	.060 .060 .060	
1.0	.190 .181 .172	.483 .454 .428	.331 .313 .296	.190 .181 .172	.061 .058 .056	
2.0	.190 .176 .165	.480 .438 .402	.329 .303 .281	.190 .176 .165	.061 .057 .054	
3.0	.188 .173 .160	.474 .426 .387	.326 .296 .271	.188 .173 .160	.060 .056 .052	
4.0	.186 .170 .157	.468 .417 .377	.322 .291 .266	.186 .170 .157	.060 .055 .052	
5.0	.184 .168 .155	.462 .410 .371	.318 .286 .262	.184 .168 .155	.059 .055 .051	
6.0	.183 .166 .154	.456 .404 .366	.315 .283 .259	.183 .166 .154	.059 .054 .051	
7.0	.181 .165 .153	.450 .399 .363	.311 .280 .257	.181 .165 .153	.058 .054 .051	
8.0	.179 .164 .152	.445 .395 .360	.308 .277 .255	.179 .164 .152	.058 .054 .050	
9.0	.177 .162 .152	.440 .391 .358	.305 .275 .254	.177 .162 .152	.057 .053 .050	
10.0	.176 .161 .151	.435 .388 .356	.302 .273 .253	.176 .161 .151	.057 .053 .050	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm										
NAME: IDRC16LAJUDSB 3500K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.4	16.6	16.3	17.5	18.6	15.7	16.8	16.5	17.7	18.9
3H	19.3	20.3	20.2	21.2	22.4	19.5	20.5	20.4	21.5	22.6
4H	21.4	22.4	22.3	23.3	24.5	21.6	22.6	22.5	23.5	24.7
6H	23.7	24.6	24.6	25.6	26.8	24.0	24.9	24.9	25.8	27.1
8H	24.9	25.8	25.8	26.8	28.0	25.2	26.1	26.2	27.1	28.3
12H	26.3	27.2	27.2	28.2	29.4	26.7	27.6	27.6	28.5	29.8
4H 2H	16.6	17.6	17.5	18.6	19.8	16.8	17.8	17.7	18.7	19.9
3H	20.5	21.4	21.5	22.4	23.6	20.6	21.5	21.5	22.4	23.7
4H	22.7	23.5	23.7	24.5	25.8	22.8	23.6	23.7	24.6	25.8
6H	25.2	25.9	26.1	26.9	28.1	25.2	26.0	26.2	27.0	28.2
8H	26.5	27.2	27.4	28.1	29.4	26.6	27.3	27.6	28.3	29.6
12H	28.0	28.6	28.9	29.6	30.9	28.2	28.8	29.1	29.8	31.1
8H 4H	23.5	24.2	24.5	25.2	26.5	23.6	24.2	24.5	25.2	26.5
6H	26.2	26.8	27.2	27.8	29.1	26.2	26.8	27.2	27.8	29.1
8H	27.7	28.2	28.7	29.3	30.6	27.7	28.3	28.7	29.3	30.6
12H	29.4	29.9	30.4	30.9	32.2	29.5	30.0	30.5	31.0	32.3
12H 4H	23.8	24.4	24.7	25.4	26.7	23.8	24.4	24.8	25.4	26.7
6H	26.6	27.1	27.5	28.1	29.4	26.6	27.1	27.6	28.1	29.4
8H	28.2	28.6	29.2	29.7	31.0	28.2	28.7	29.2	29.7	31.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				

CIE Pub.117, 2657 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 3.4$)
Area: 0.077931 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm		
NAME: IDRC16LAJUDSB 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	33	19	12	31	19	11	28	17	10	3
0.80	41	26	18	38	25	17	34	22	15	5
1.00	48	33	23	45	31	22	39	30	20	8
1.25	55	40	30	51	37	28	44	33	25	11
1.50	60	45	35	56	42	33	48	37	29	13
2.00	69	54	44	63	51	41	54	44	36	18
2.50	74	61	50	68	56	47	58	48	41	21
3.00	78	66	56	72	61	52	61	52	45	24
4.00	84	73	64	77	68	60	65	58	51	28
5.00	88	78	70	81	72	65	68	61	56	31
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2℃
 Operators: Dano
 Test Date: 2023-07-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 2.900m [K=0.8810]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm		
NAME: IDRC16LAJUDSB 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

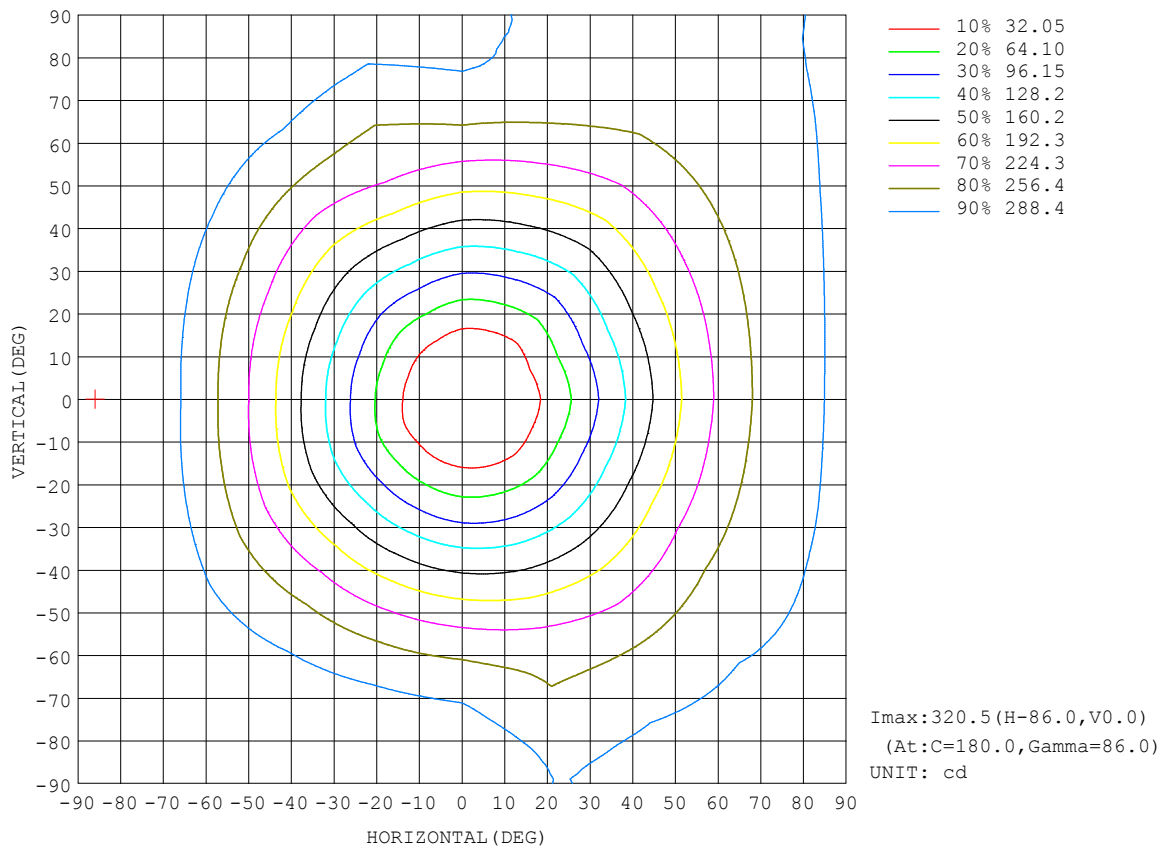


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

AAI Figure

Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm		
NAME: IDRC16LAJUDSB 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

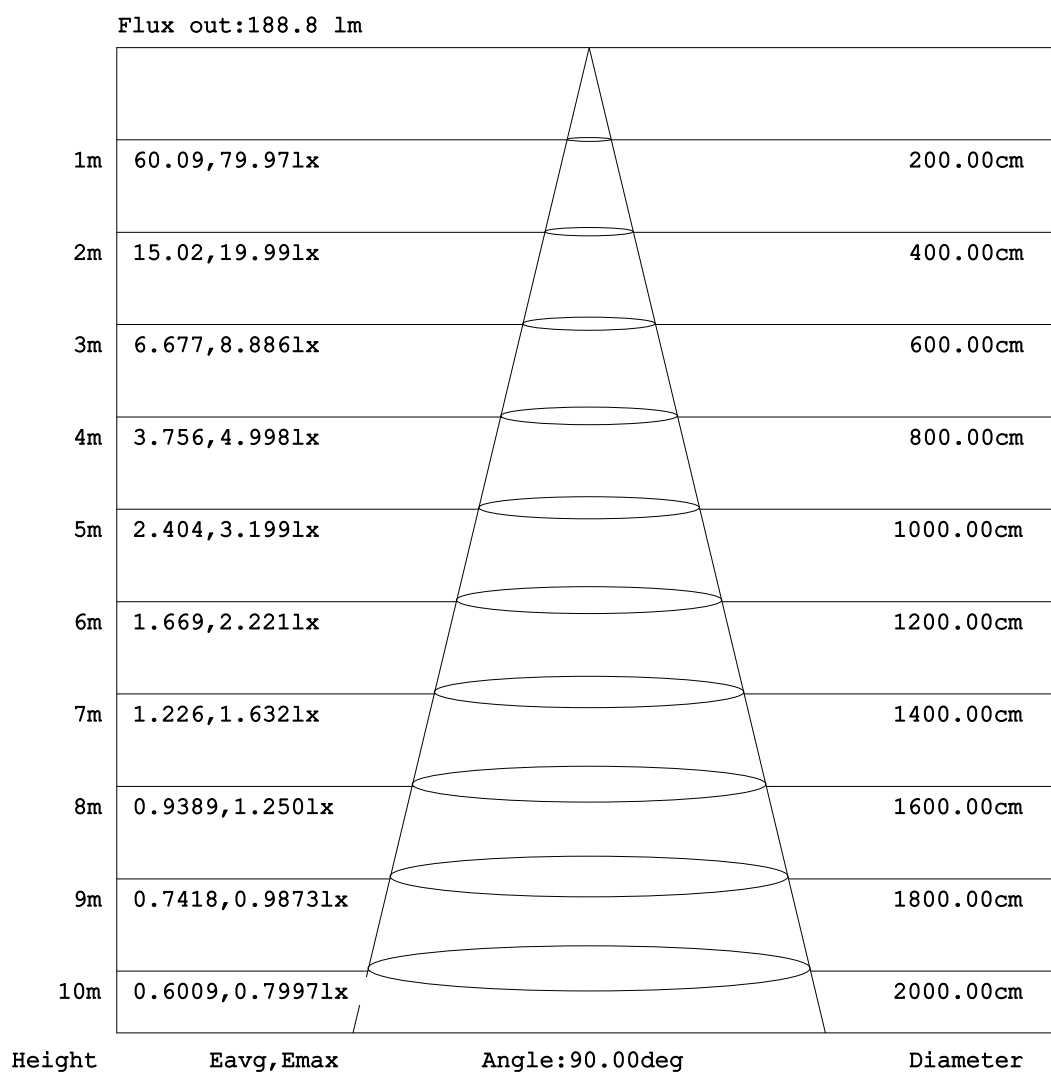


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm		
NAME: IDRC16LAJUDSB 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

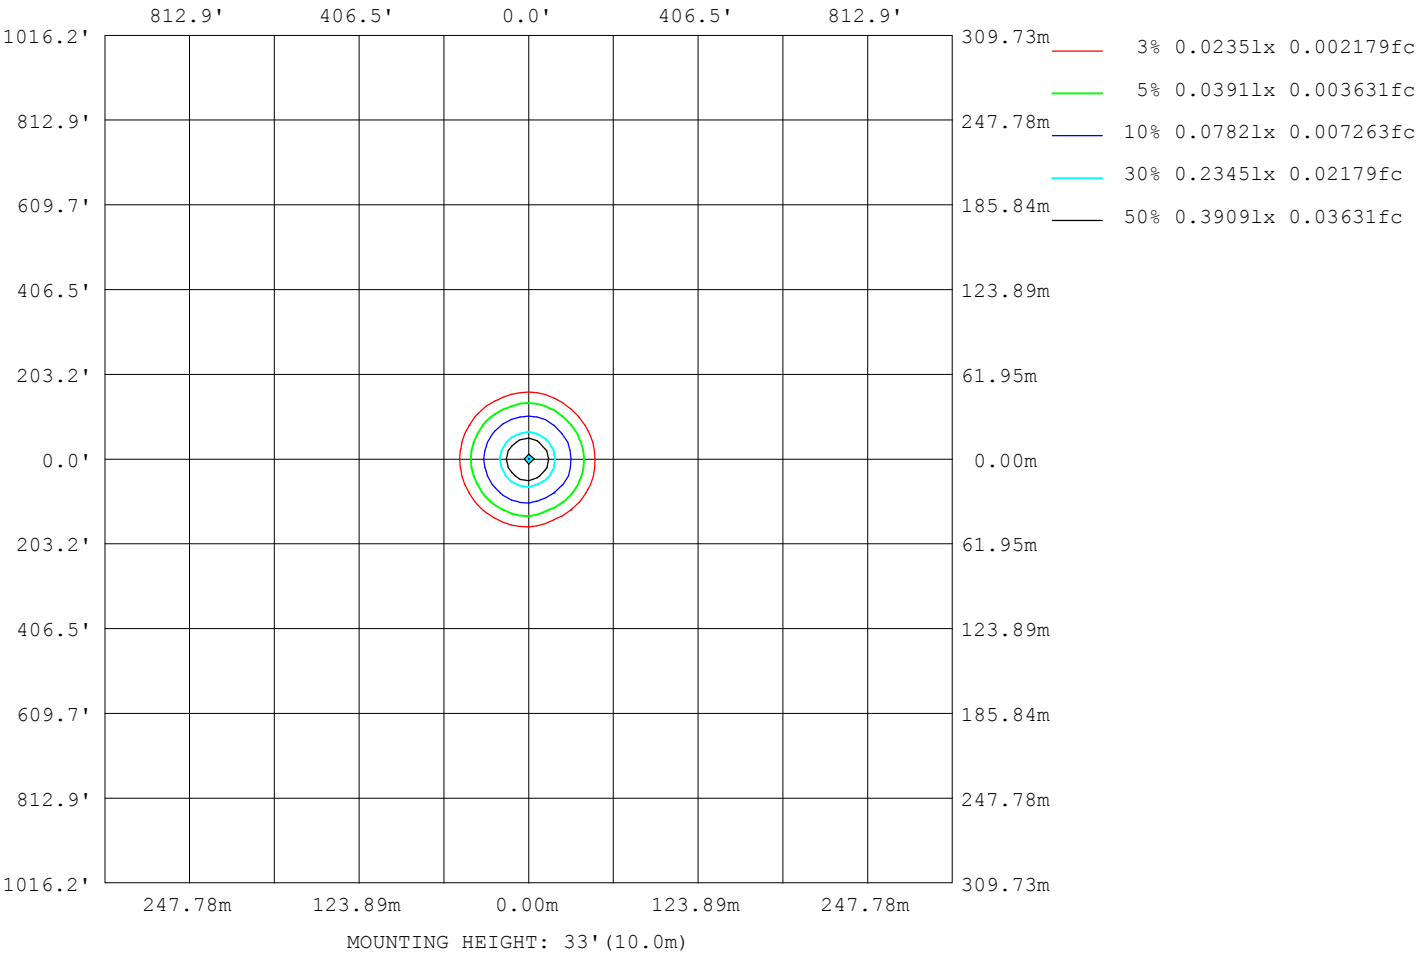

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

Planar Illuminance Curve

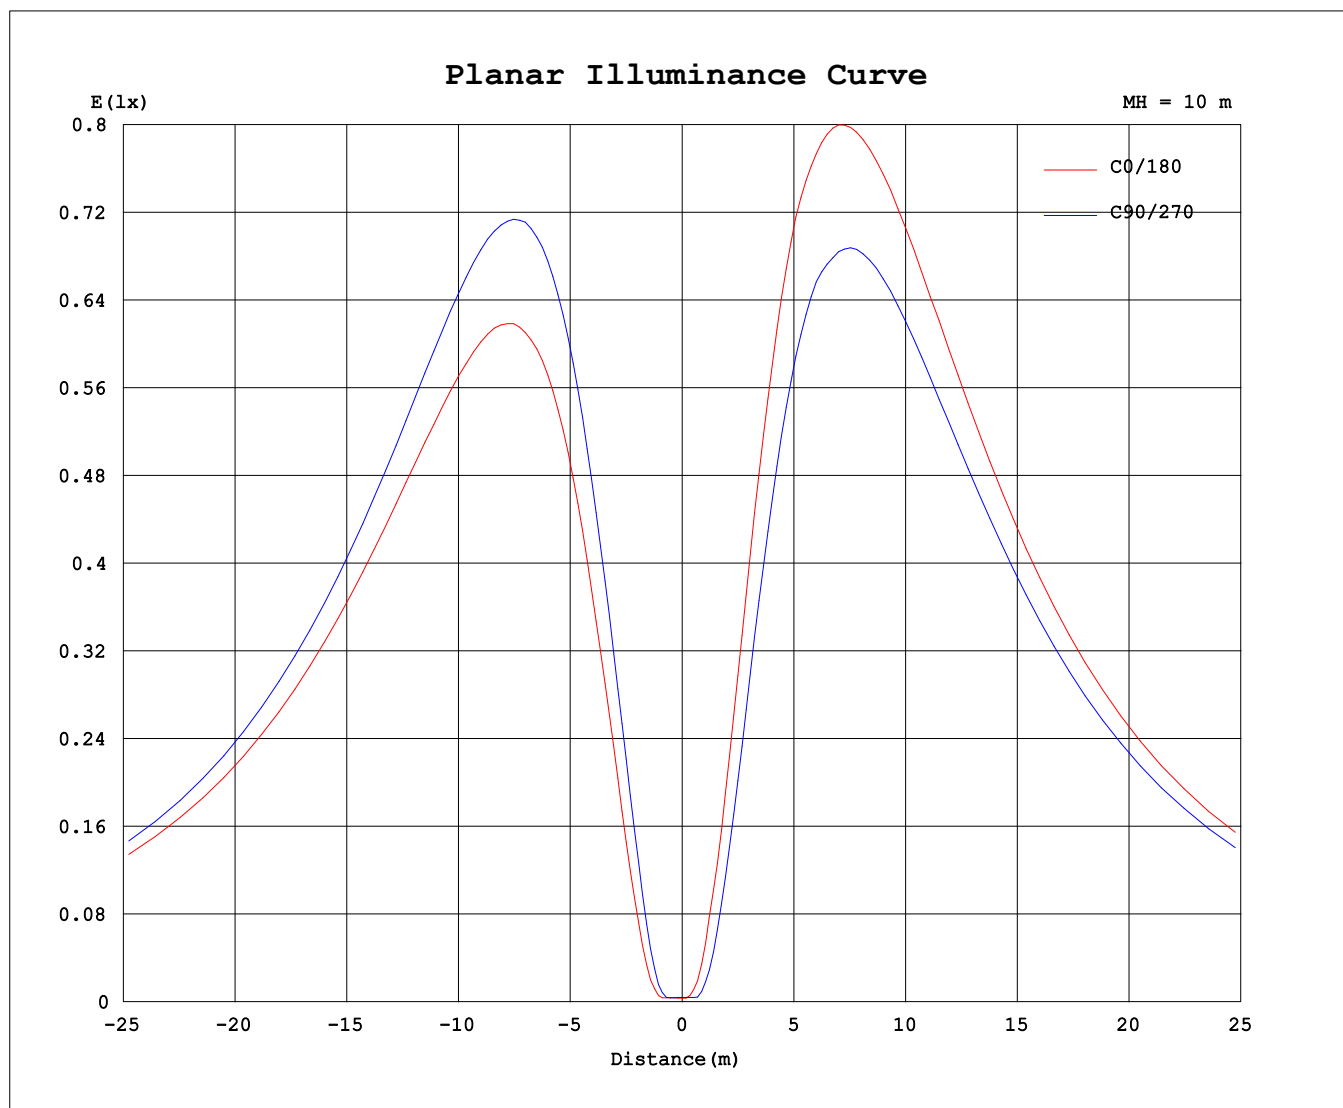

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2℃
Operators: Dano
Test Date: 2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 2.900m [K=0.8810]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.3800A P:45.31W PF:0.9931 Freq:60.01Hz Lamp Flux:2656.91x1 lm																	
NAME: IDRC16LAJUDSB 3500K									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41			
5	0.43	0.40	0.41	0.41	0.87	1.09	1.91	1.49	3.90	3.09	3.27	2.37	1.00	0.43	0.42	1.01			
10	5.98	4.65	5.43	8.11	10.2	11.5	14.8	13.0	18.2	16.2	15.8	13.2	9.40	6.42	6.00	7.49			
15	21.4	20.0	20.6	24.4	28.1	30.5	34.4	33.0	41.1	36.4	34.6	31.9	25.8	22.5	20.0	22.7			
20	42.6	40.5	41.8	45.6	49.9	53.8	58.9	57.3	69.1	60.2	58.0	55.3	47.8	43.5	39.2	43.2			
25	67.7	63.6	66.3	69.9	74.8	79.7	85.9	83.8	99.5	86.0	84.2	80.9	72.6	67.3	62.3	66.4			
30	95.1	88.4	92.6	95.4	102	107	114	111	130	112	111	107	98.7	92.3	87.3	90.9			
35	123	114	119	122	129	134	143	139	161	138	138	134	124	117	112	115			
40	151	138	146	147	156	161	171	166	192	164	165	160	150	142	137	140			
45	179	163	171	172	182	187	198	192	221	189	189	185	175	165	162	164			
50	205	186	194	196	207	211	223	216	249	212	212	209	199	188	185	186			
55	230	207	215	218	230	233	247	239	274	233	234	228	221	209	207	207			
60	253	227	234	237	252	253	267	259	297	252	255	241	241	228	227	227			
65	273	244	253	248	269	270	284	276	316	268	273	251	258	246	245	244			
70	290	257	267	254	284	285	297	290	333	281	288	263	273	259	259	258			
75	303	269	280	263	296	294	306	301	344	291	299	276	284	270	269	269			
80	313	278	289	273	305	292	314	309	352	298	307	286	292	270	277	277			
85	320	283	295	280	310	294	317	313	355	301	311	292	296	270	283	282			
90	322	284	297	283	310	295	317	312	354	300	311	293	296	272	284	283			
95	320	282	294	279	307	289	311	308	348	295	306	288	294	268	282	280			
100	314	277	287	271	300	279	302	300	337	286	297	278	287	259	276	274			
105	304	268	277	263	288	267	289	289	323	275	285	269	276	249	267	266			
110	290	256	264	257	274	260	273	274	305	260	269	263	263	242	256	255			
115	273	241	248	247	256	252	255	256	285	244	253	253	247	236	241	240			
120	254	224	231	230	237	233	234	237	262	224	234	235	228	221	224	223			
125	232	205	212	210	215	212	213	215	236	203	214	214	207	202	206	204			
130	209	184	190	188	191	189	190	191	208	180	191	190	185	181	187	184			
135	184	162	167	165	167	164	164	166	180	156	166	166	161	159	165	162			
140	157	139	142	141	141	139	138	141	150	131	140	141	137	136	141	139			
145	131	116	117	116	115	114	112	114	120	106	113	116	113	112	117	116			
150	105	92.9	93.1	92.6	90.5	88.9	85.7	89.1	90.7	80.6	85.8	89.9	88.2	89.1	91.6	91.7			
155	78.3	69.6	68.6	68.4	65.4	64.0	60.4	63.7	62.6	56.0	59.4	64.1	64.3	65.9	66.1	67.8			
160	53.1	47.5	45.8	45.6	42.1	40.8	37.4	40.1	37.0	33.4	35.6	39.8	42.5	43.9	43.6	44.7			
165	30.7	27.3	26.1	25.1	22.1	20.3	18.6	19.8	16.7	14.9	15.9	19.0	23.1	24.6	24.7	22.7			
170	13.3	11.1	11.0	9.46	7.17	5.22	4.70	5.54	3.42	3.12	2.75	4.65	8.40	9.41	9.65	7.71			
175	2.11	1.82	1.43	0.89	0.35	0.30	0.31	0.31	0.31	0.27	0.62	0.32	0.94	1.67	1.67	0.59			
180	0.87	0.28	0.30	0.30	0.67	0.36	0.31	0.29	0.79	0.68	0.30	0.30	0.30	0.54	0.38	0.31			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks: