


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm		
NAME: IDRC16LAJUDSN 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 48.66 lm/W
MODEL		I _{max} (cd)	275.2	S/MH (C0/180)	20.74	
NOMINAL POWER(W)		LOR (%)	100.0	S/MH (C90/270)	20.74	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2213.6	η UP,DN (C0-180)	25.0,25.3	
NOMINAL FLUX(lm)	2213.63	CIE CLASS	DIFFUSE	η UP,DN (C180-360)	24.8,24.9	
LAMPS INSIDE	1	η up (%)	49.8	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	120	η down (%)	50.2	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

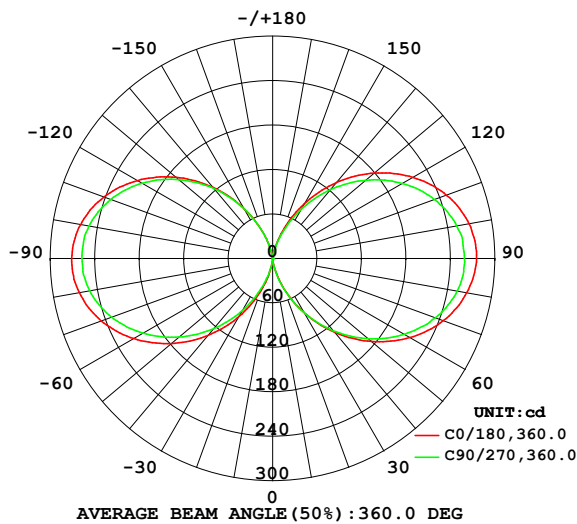

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

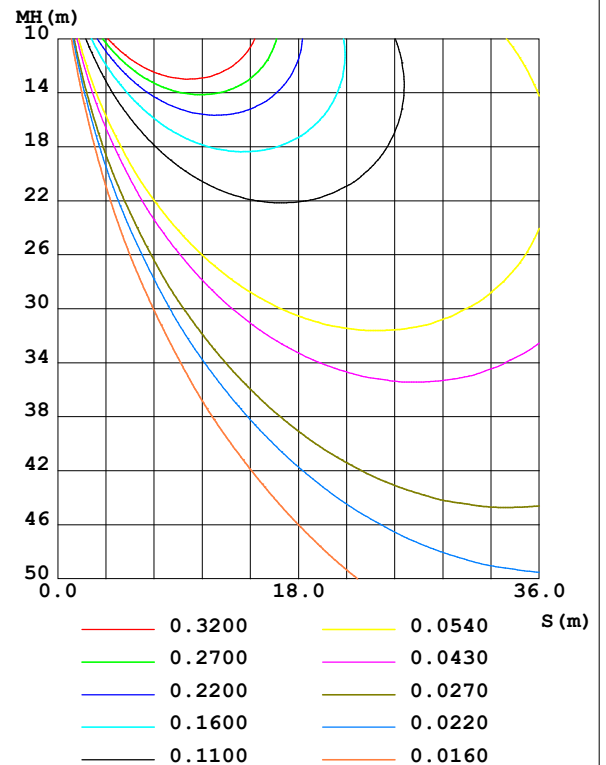

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2℃
Operators: Dano
Test Date: 2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 2.900m [K=0.8810]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	8.524	9.278	9.559	11.13	11.24	9.837	8.402	6.556	0- 10	0.3664	0.3664	0.02,0.02
20	40.37	40.93	42.07	43.02	45.96	40.87	39.06	36.78	10- 20	7.268	7.635	0.34,0.34
30	83.90	81.86	84.07	83.65	89.99	81.65	80.49	77.48	20- 30	28.88	36.51	1.65,1.65
40	129.9	124.9	127.4	125.7	135.5	123.9	123.7	120.0	30- 40	65.39	101.9	4.6,4.6
50	174.3	163.9	168.7	165.9	178.7	162.0	165.0	160.8	40- 50	112.6	214.5	9.69,9.69
60	213.7	196.5	205.0	200.8	216.2	194.6	201.9	196.8	50- 60	164.2	378.7	17.1,17.1
70	245.3	226.0	233.9	227.1	246.3	222.7	231.5	224.2	60- 70	212.5	591.1	26.7,26.7
80	266.0	245.6	253.0	243.4	265.1	241.0	250.8	241.8	70- 80	249.6	840.7	38,38
90	275.2	253.5	259.0	248.9	271.1	247.4	257.5	249.7	80- 90	270.6	1111	50.2,50.2
100	269.2	247.2	252.4	241.1	263.3	240.7	251.6	243.7	90-100	270.9	1382	62.4,62.4
110	249.9	228.3	232.5	221.4	242.4	221.3	232.7	225.6	100-110	249.0	1631	73.7,73.7
120	218.9	200.1	202.6	191.6	210.5	193.4	203.4	197.1	110-120	212.2	1843	83.3,83.3
130	179.7	165.3	164.4	156.9	170.7	159.3	165.8	161.9	120-130	163.8	2007	90.7,90.7
140	133.7	123.0	121.2	115.5	125.3	117.8	123.1	121.9	130-140	111.2	2118	95.7,95.7
150	85.20	78.08	75.78	71.60	78.18	73.33	77.98	79.09	140-150	63.04	2181	98.5,98.5
160	39.29	35.54	33.66	30.80	35.09	33.49	35.00	39.74	150-160	26.32	2208	99.7,99.7
170	6.596	6.044	5.288	3.638	4.530	3.847	5.190	6.962	160-170	5.741	2213	100,100
180	0.3554	0.3818	0.4519	0.2782	0.3329	0.2320	0.2356	0.2313	170-180	0.1681	2214	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 151.85 lm

%lum = 6.9%

%lamp = 6.9%

Conical surface Flux(120deg): 378.69 lm

%lum = 17.1%


%lamp = 17.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Dano
 Test Date:2023-07-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:2.900m [K=0.8810]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm		
NAME: IDRC16LAJUDSN 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

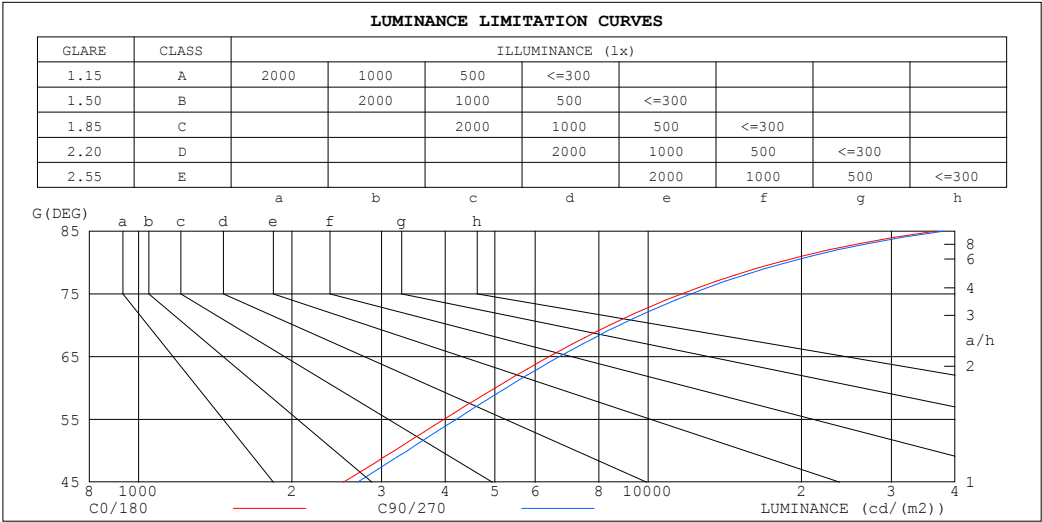

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	36597	38016
80	17944	18704
75	11640	12144
70	8399	8778
65	6390	6694
60	5006	5262
55	3975	4203
50	3176	3369
45	2523	2691


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm		
NAME: IDRC16LAJUDSN 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	30%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

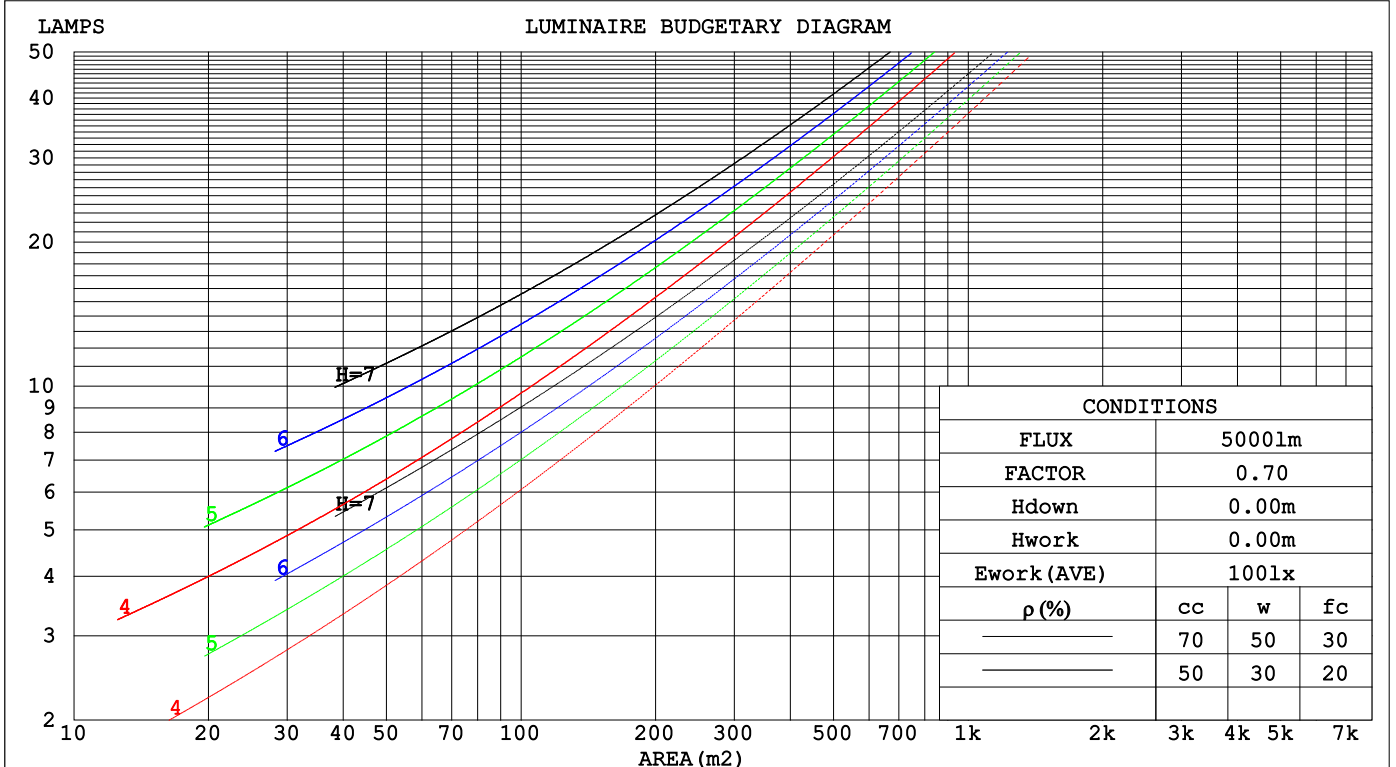

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm		
NAME: IDRC16LAJUDSN 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	30%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.350 .202 .065	.431 .246 .078	.388 .223 .071	.350 .202 .065	.314 .182 .059	
2.0	.275 .154 .048	.350 .193 .059	.311 .173 .054	.275 .154 .048	.242 .137 .043	
3.0	.232 .127 .039	.300 .160 .048	.264 .143 .044	.232 .127 .039	.201 .112 .035	
4.0	.201 .108 .033	.264 .138 .041	.231 .123 .037	.201 .108 .033	.173 .094 .029	
5.0	.178 .094 .028	.236 .121 .035	.206 .107 .032	.178 .094 .028	.152 .081 .024	
6.0	.160 .083 .024	.213 .108 .031	.186 .095 .028	.160 .083 .024	.136 .072 .021	
7.0	.146 .075 .022	.195 .097 .028	.170 .086 .025	.146 .075 .022	.123 .064 .019	
8.0	.134 .068 .020	.179 .088 .025	.156 .078 .022	.134 .068 .020	.113 .058 .017	
9.0	.124 .062 .018	.166 .081 .023	.144 .071 .020	.124 .062 .018	.104 .053 .015	
10.0	.115 .057 .016	.155 .075 .021	.134 .066 .019	.115 .057 .016	.097 .049 .014	

pcc	30%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.191 .191 .191	.487 .487 .487	.332 .332 .332	.191 .191 .191	.061 .061 .061	
1.0	.193 .184 .175	.490 .461 .435	.335 .317 .301	.193 .184 .175	.062 .059 .057	
2.0	.192 .179 .167	.486 .445 .409	.333 .308 .286	.192 .179 .167	.062 .058 .055	
3.0	.191 .176 .163	.481 .433 .394	.330 .301 .276	.191 .176 .163	.061 .057 .053	
4.0	.189 .173 .160	.475 .424 .384	.327 .295 .271	.189 .173 .160	.061 .056 .053	
5.0	.187 .171 .158	.469 .417 .378	.323 .291 .267	.187 .171 .158	.060 .056 .052	
6.0	.185 .169 .157	.463 .411 .373	.319 .288 .264	.185 .169 .157	.060 .055 .052	
7.0	.183 .168 .156	.457 .406 .370	.316 .285 .262	.183 .168 .156	.059 .055 .052	
8.0	.182 .166 .155	.452 .402 .367	.312 .282 .260	.182 .166 .155	.059 .055 .051	
9.0	.180 .165 .155	.447 .398 .365	.309 .280 .259	.180 .165 .155	.058 .054 .051	
10.0	.179 .164 .154	.442 .395 .364	.306 .278 .258	.179 .164 .154	.058 .054 .051	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm										
NAME: IDRC16LAJUDSN 3500K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.2	16.4	16.0	18.3	20.7	14.4	16.6	16.2	18.5	20.9
3H	18.1	20.2	20.0	22.1	24.5	18.4	20.4	20.2	22.3	24.7
4H	20.2	22.1	22.0	24.0	26.5	20.4	22.3	22.2	24.2	26.7
6H	22.4	24.2	24.2	26.1	28.7	22.6	24.4	24.5	26.3	28.9
8H	23.6	25.3	25.4	27.3	29.8	23.8	25.5	25.6	27.5	30.0
12H	24.9	26.6	26.8	28.5	31.1	25.1	26.8	27.0	28.8	31.3
4H 2H	15.0	16.9	16.8	18.8	21.3	15.1	17.1	17.0	19.0	21.5
3H	19.0	20.7	20.9	22.7	25.2	19.2	20.8	21.0	22.8	25.4
4H	21.2	22.7	23.1	24.7	27.3	21.3	22.9	23.2	24.9	27.4
6H	23.5	24.9	25.4	26.9	29.5	23.6	25.0	25.5	27.0	29.6
8H	24.8	26.1	26.7	28.1	30.7	24.9	26.2	26.8	28.2	30.9
12H	26.2	27.4	28.2	29.5	32.1	26.3	27.6	28.3	29.6	32.3
8H 4H	21.8	23.1	23.7	25.1	27.8	21.9	23.2	23.8	25.2	27.9
6H	24.4	25.5	26.4	27.6	30.2	24.4	25.6	26.4	27.6	30.3
8H	25.8	26.9	27.8	28.9	31.6	25.9	26.9	27.9	29.0	31.6
12H	27.5	28.4	29.5	30.5	33.2	27.5	28.4	29.5	30.5	33.2
12H 4H	22.0	23.2	23.9	25.2	27.9	22.1	23.3	24.0	25.3	28.0
6H	24.7	25.7	26.7	27.8	30.5	24.7	25.7	26.7	27.8	30.5
8H	26.2	27.2	28.3	29.2	32.0	26.2	27.2	28.3	29.2	32.0
CIE190: 2010										

CIE190: 2010
Area: 0.077931 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm		
NAME: IDRC16LAJUDSN 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	33	19	12	31	18	11	28	17	10	3
0.80	41	26	17	38	25	17	34	22	15	5
1.00	48	33	23	45	31	22	39	29	19	8
1.25	55	40	29	51	37	28	44	32	24	11
1.50	60	45	35	56	42	33	47	36	28	13
2.00	68	54	44	63	50	41	53	43	35	17
2.50	74	61	50	68	56	47	57	48	40	20
3.00	78	66	56	72	61	52	60	52	45	23
4.00	84	73	64	77	68	60	65	57	51	27
5.00	87	78	70	80	72	65	67	61	55	30
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2℃
 Operators: Dano
 Test Date: 2023-07-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 2.900m [K=0.8810]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm		
NAME: IDRC16LAJUDSN 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

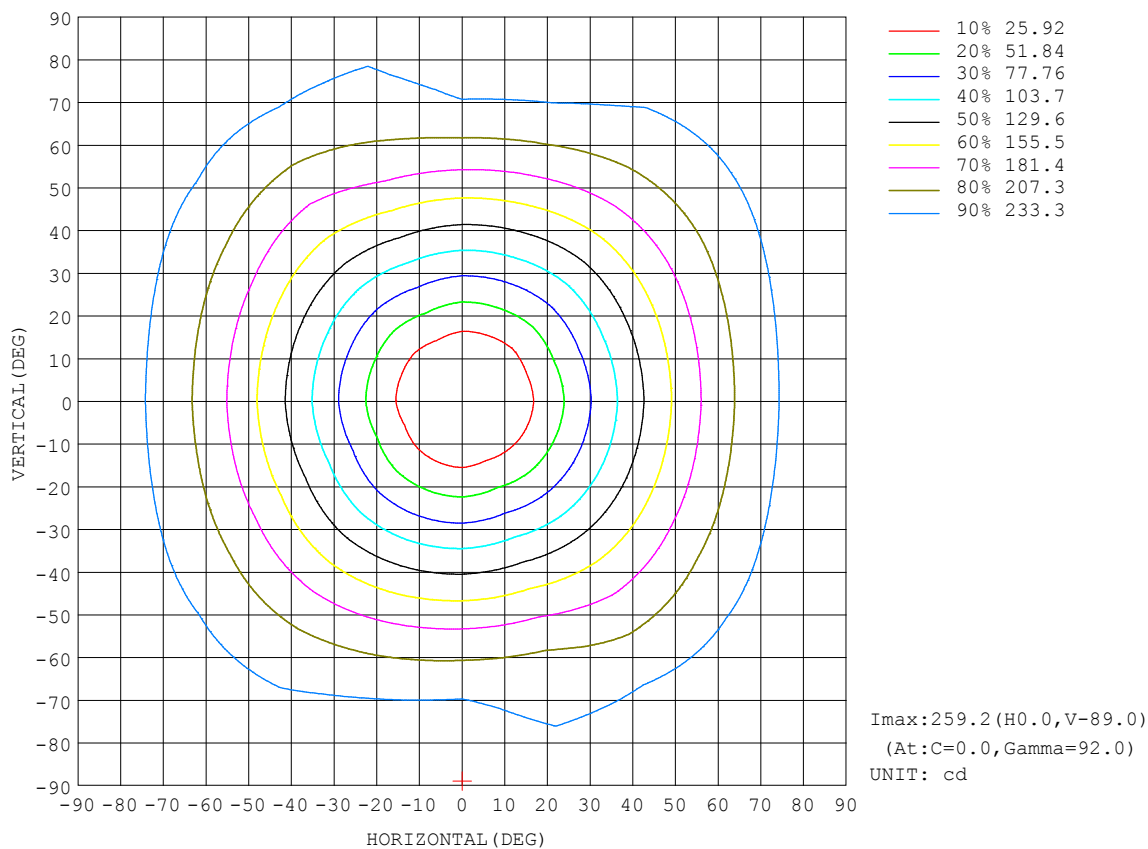


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

AAI Figure

Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm		
NAME: IDRC16LAJUDSN 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

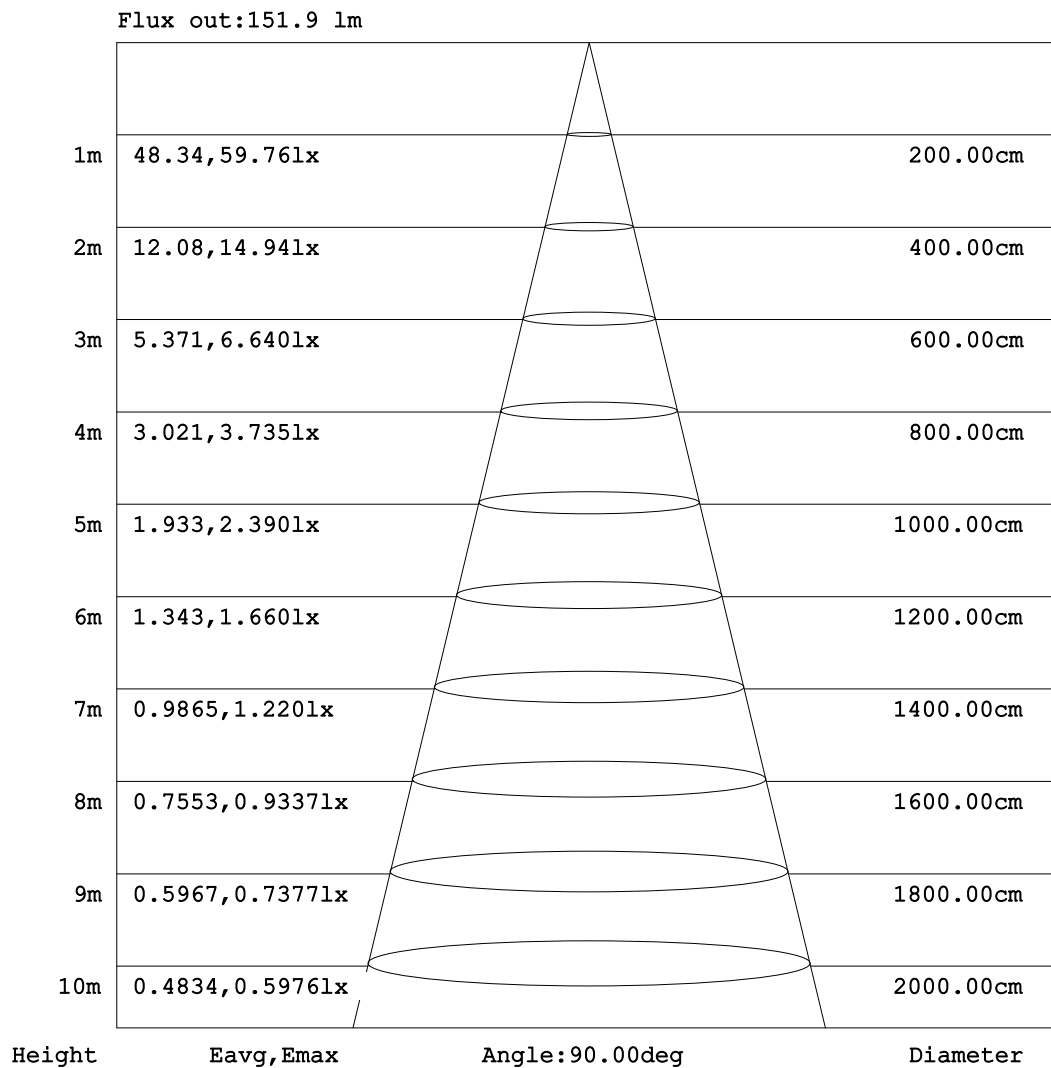


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

ISOLUX DIAGRAM


Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm		
NAME: IDRC16LAJUDSN 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

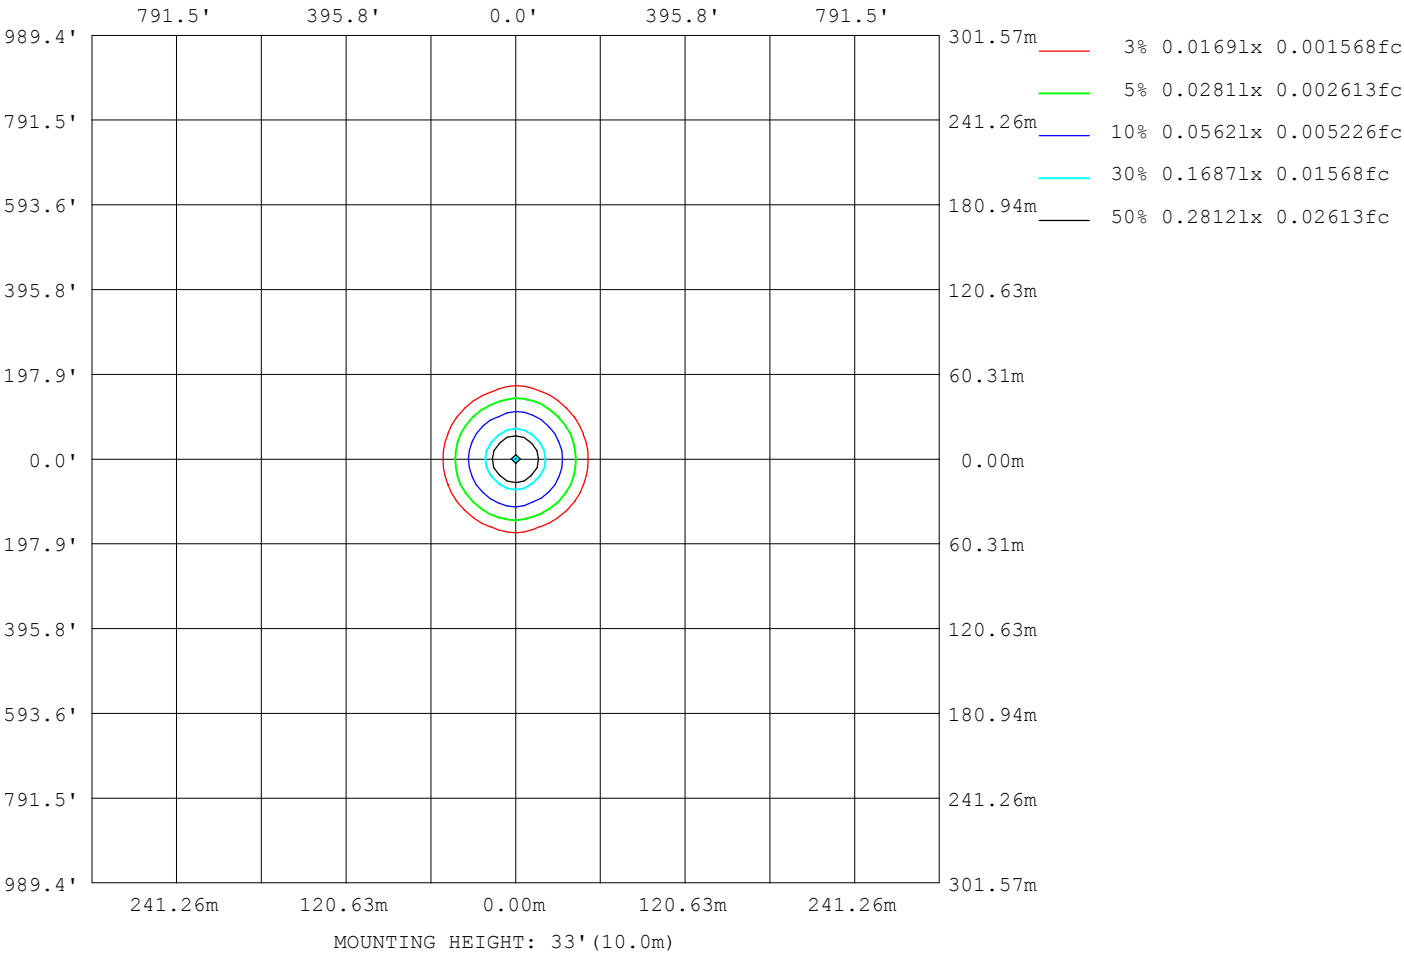

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

Planar Illuminance Curve

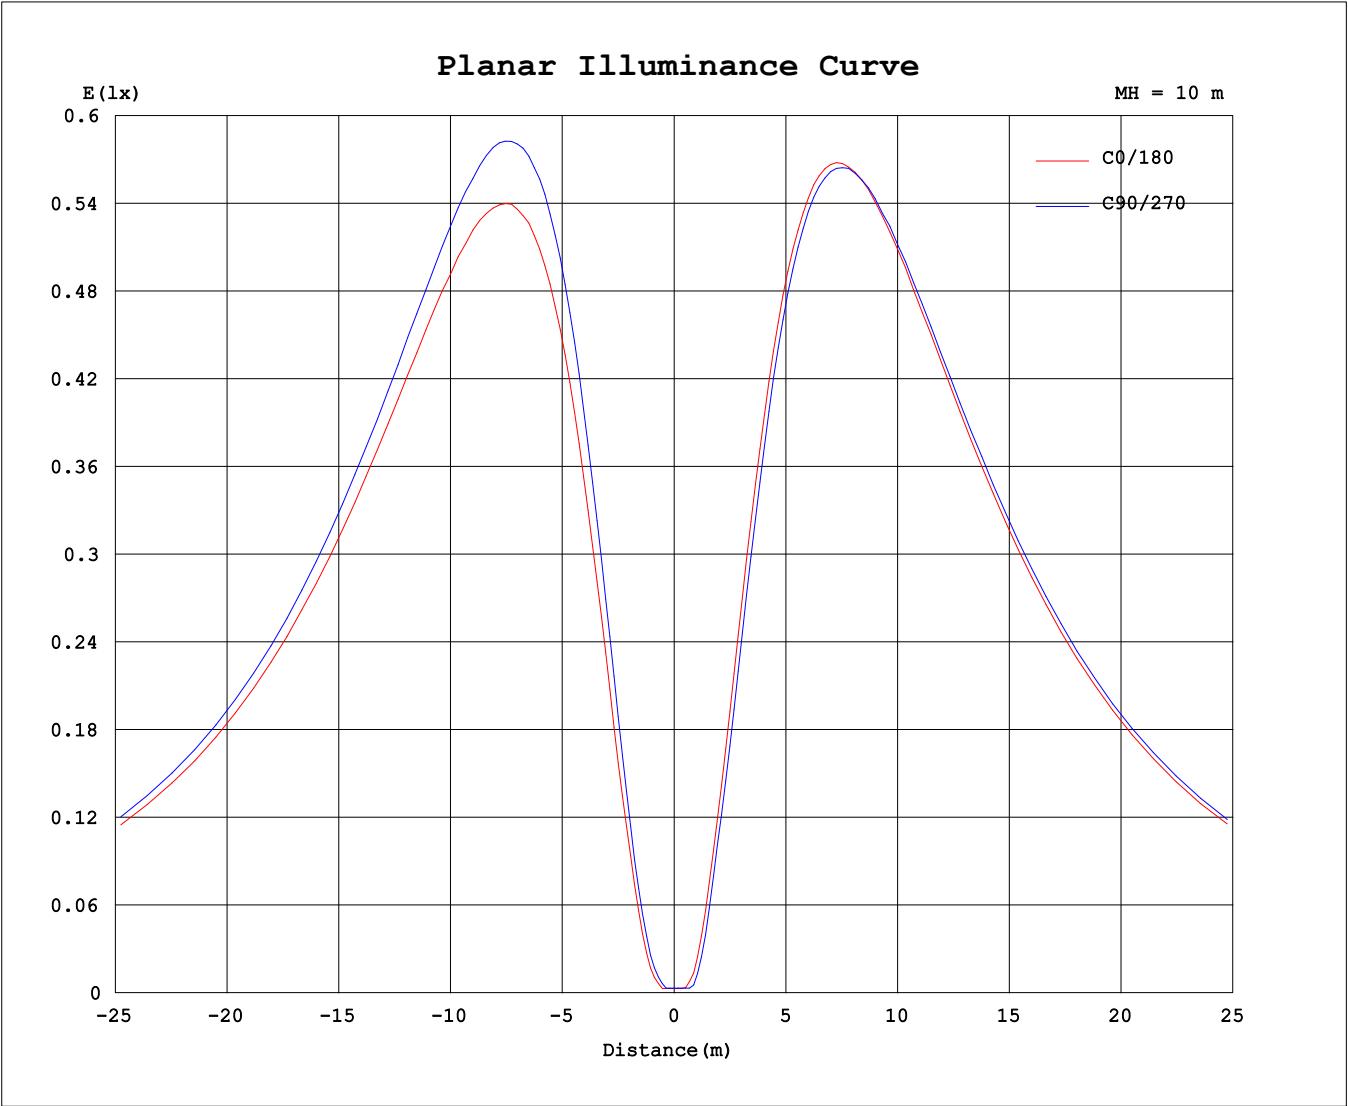

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.3815A P:45.49W PF:0.9933 Freq:60.01Hz Lamp Flux:2213.63x1 lm																	
NAME: IDRC16LAJUDSN 3500K									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34	0.34			
5	1.21	1.24	0.99	1.17	1.77	1.91	1.67	1.53	1.53	1.55	1.36	0.89	0.56	0.66	0.47	0.46			
10	8.52	7.58	9.28	10.4	9.56	9.91	11.1	11.7	11.2	9.58	9.84	9.59	8.40	6.92	6.56	7.19			
15	22.1	20.8	23.6	25.7	24.1	24.3	25.6	27.1	26.6	23.6	23.2	24.4	21.5	20.4	19.6	21.0			
20	40.4	37.7	40.9	44.1	42.1	41.8	43.0	45.1	46.0	40.9	40.9	42.4	39.1	37.7	36.8	38.2			
25	61.5	56.6	60.8	64.4	62.5	61.3	62.8	64.9	67.5	60.0	60.7	62.5	59.2	57.3	56.6	57.5			
30	83.9	76.6	81.9	85.8	84.1	81.8	83.6	85.5	90.0	80.0	81.6	83.4	80.5	77.8	77.5	77.8			
35	107	97.2	103	107	106	103	105	106	113	100	103	104	102	98.9	98.7	98.6			
40	130	118	125	128	127	124	126	127	136	120	124	126	124	120	120	119			
45	152	138	145	149	148	144	146	147	158	140	144	146	145	140	141	139			
50	174	157	164	169	169	163	166	166	179	159	162	165	165	160	161	158			
55	195	175	181	187	188	181	184	183	198	176	178	184	184	179	180	176			
60	214	192	196	204	205	198	201	199	216	192	195	199	202	196	197	193			
65	231	207	212	215	220	213	215	214	233	206	210	208	218	211	212	208			
70	245	219	226	220	234	225	227	226	246	218	223	214	231	225	224	221			
75	257	230	237	226	245	234	236	236	257	229	233	223	242	235	234	231			
80	266	238	246	236	253	235	243	243	265	236	241	232	251	237	242	239			
85	272	243	251	243	258	237	248	246	270	241	246	238	256	238	248	245			
90	275	246	253	246	259	240	249	248	271	242	247	242	257	242	250	247			
95	274	245	252	244	257	237	247	246	269	240	246	239	257	240	248	246			
100	269	241	247	237	252	230	241	241	263	236	241	233	252	234	244	242			
105	261	234	239	229	244	221	233	232	255	228	232	225	244	226	236	235			
110	250	225	228	224	232	212	221	222	242	218	221	221	233	215	226	225			
115	236	212	215	216	219	207	208	209	228	205	208	213	219	209	213	212			
120	219	198	200	204	203	197	192	193	211	191	193	200	203	200	197	198			
125	200	181	184	186	184	180	175	175	192	174	177	182	185	186	180	181			
130	180	163	165	167	164	161	157	156	171	156	159	163	166	167	162	163			
135	157	144	145	146	143	141	137	136	148	136	139	143	145	147	143	143			
140	134	123	123	123	121	120	115	115	125	116	118	121	123	126	122	121			
145	110	101	101	101	98.5	98.3	93.7	93.0	102	94.9	95.5	99.3	101	104	100	99.4			
150	85.2	79.7	78.1	78.3	75.8	76.5	71.6	71.2	78.2	73.5	73.3	76.7	78.0	82.1	79.1	77.2			
155	61.5	58.4	56.0	56.3	53.9	54.9	50.1	50.2	55.7	52.4	52.2	54.4	55.5	58.5	58.8	55.8			
160	39.3	38.1	35.5	35.7	33.7	34.8	30.8	30.7	35.1	32.5	33.5	33.6	35.0	37.7	39.7	36.4			
165	20.5	20.1	18.7	17.8	17.2	17.2	15.1	14.2	17.5	15.8	16.7	16.1	17.7	19.6	21.6	19.6			
170	6.60	5.86	6.04	5.46	5.29	4.02	3.64	3.67	4.53	4.01	3.85	4.23	5.19	6.00	6.96	7.20			
175	0.67	0.34	0.33	0.53	0.40	0.24	0.24	0.24	0.27	0.24	0.47	0.32	0.25	0.36	0.25	0.65			
180	0.36	0.22	0.38	0.24	0.45	0.23	0.28	0.25	0.33	0.29	0.23	0.33	0.24	0.37	0.23	0.26			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-07-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks: