


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm		
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 56.72 lm/W
MODEL		Imax(cd)	254.0	S/MH(C0/180)	1.46	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.25	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1392.6	η UP,DN(C0-180)	14.6,35.3	
NOMINAL FLUX(lm)	1392.62	CIE CLASS	SEMI-D.	η UP,DN(C180-360)	14.7,35.4	
LAMPS INSIDE	1	η up(%)	29.4	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	120	η down(%)	70.6	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

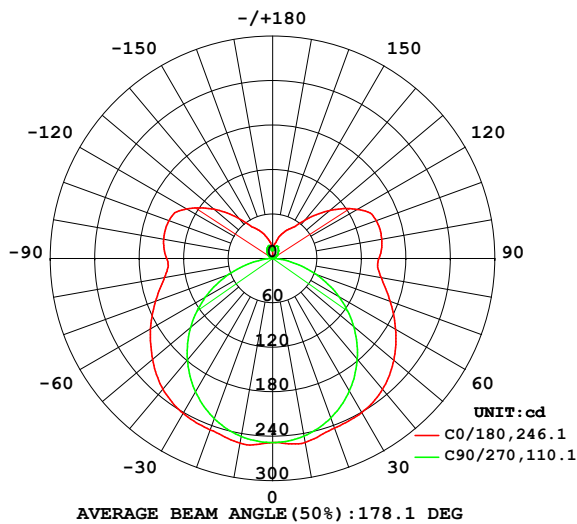

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

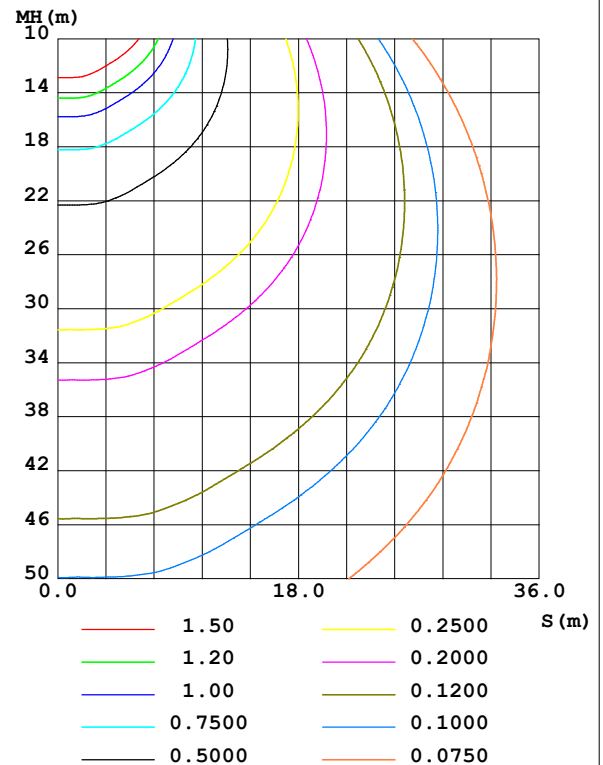

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	252.1	249.9	243.5	251.0	253.2	251.6	244.0	249.9	0- 10	23.82	23.82	1.71, 1.71
20	243.9	238.9	229.3	240.3	246.3	241.3	230.2	239.1	10- 20	69.26	93.08	6.68, 6.68
30	240.3	224.2	206.9	225.4	241.6	226.8	208.1	223.8	20- 30	107.5	200.6	14.4, 14.4
40	230.8	208.2	177.7	208.6	230.4	209.9	179.2	208.4	30- 40	135.7	336.3	24.1, 24.1
50	213.7	186.1	143.0	186.1	211.7	186.6	144.5	187.7	40- 50	150.6	486.9	35, 35
60	191.8	158.0	103.7	158.2	190.4	157.5	105.2	160.8	50- 60	150.6	637.5	45.8, 45.8
70	168.6	127.3	61.57	128.9	168.1	127.4	62.97	131.2	60- 70	137.0	774.5	55.6, 55.6
80	148.7	100.6	21.89	103.3	148.2	100.6	23.08	105.0	70- 80	114.5	889.0	63.8, 63.8
90	143.6	91.21	0.5990	95.15	143.2	90.66	0.6122	96.04	80- 90	94.90	983.9	70.6, 70.6
100	149.7	96.90	1.804	101.1	149.4	96.28	1.717	102.0	90-100	95.41	1079	77.5, 77.5
110	149.1	96.36	2.721	98.93	149.1	95.83	2.624	100.2	100-110	94.25	1174	84.3, 84.3
120	132.8	76.96	5.057	79.70	133.9	77.28	5.329	78.84	110-120	80.34	1254	90, 90
130	101.2	47.68	8.724	56.66	103.4	54.96	8.981	54.64	120-130	58.13	1312	94.2, 94.2
140	67.27	33.88	12.50	39.92	70.34	39.50	12.11	41.67	130-140	36.89	1349	96.9, 96.9
150	46.66	31.34	15.65	33.49	47.19	35.44	15.29	32.06	140-150	22.34	1371	98.5, 98.5
160	34.79	26.01	18.11	25.63	34.96	30.61	17.71	23.30	150-160	13.44	1385	99.4, 99.4
170	20.97	15.26	12.08	19.96	23.52	22.67	12.06	16.54	160-170	6.493	1391	99.9, 99.9
180	10.22	8.589	17.65	10.37	3.681	3.874	14.89	14.75	170-180	1.452	1393	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 410.66 lm

%lum = 29.5%

%lamp = 29.5%

Conical surface Flux(120deg): 637.5 lm

%lum = 45.8%


%lamp = 45.8%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Dano
 Test Date:2023-05-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:2.900m [K=0.8810]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm		
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

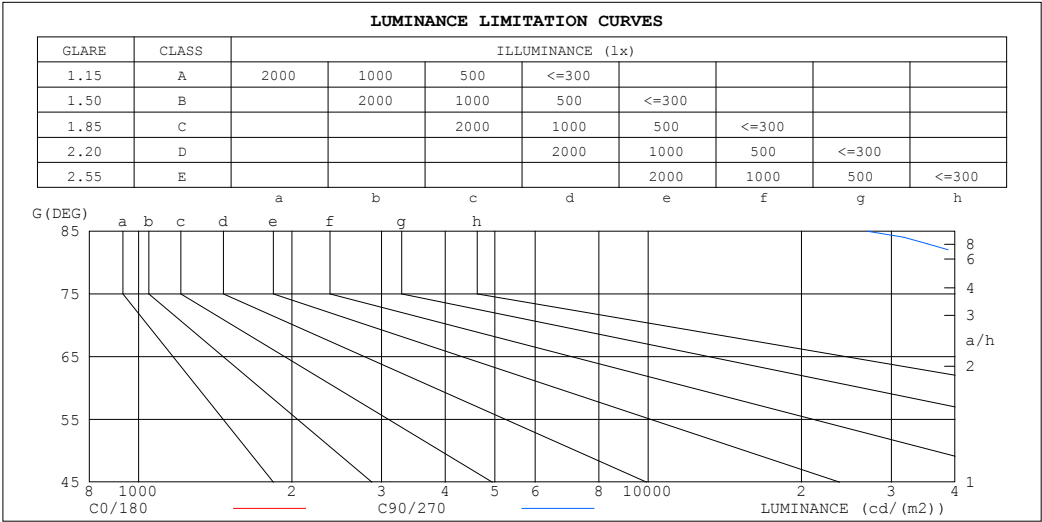

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	579715	26896
80	303564	44563
75	216385	55707
70	174742	63638
65	151064	69275
60	135933	73317
55	125518	76283
50	117825	78651
45	111741	80471


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm		
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

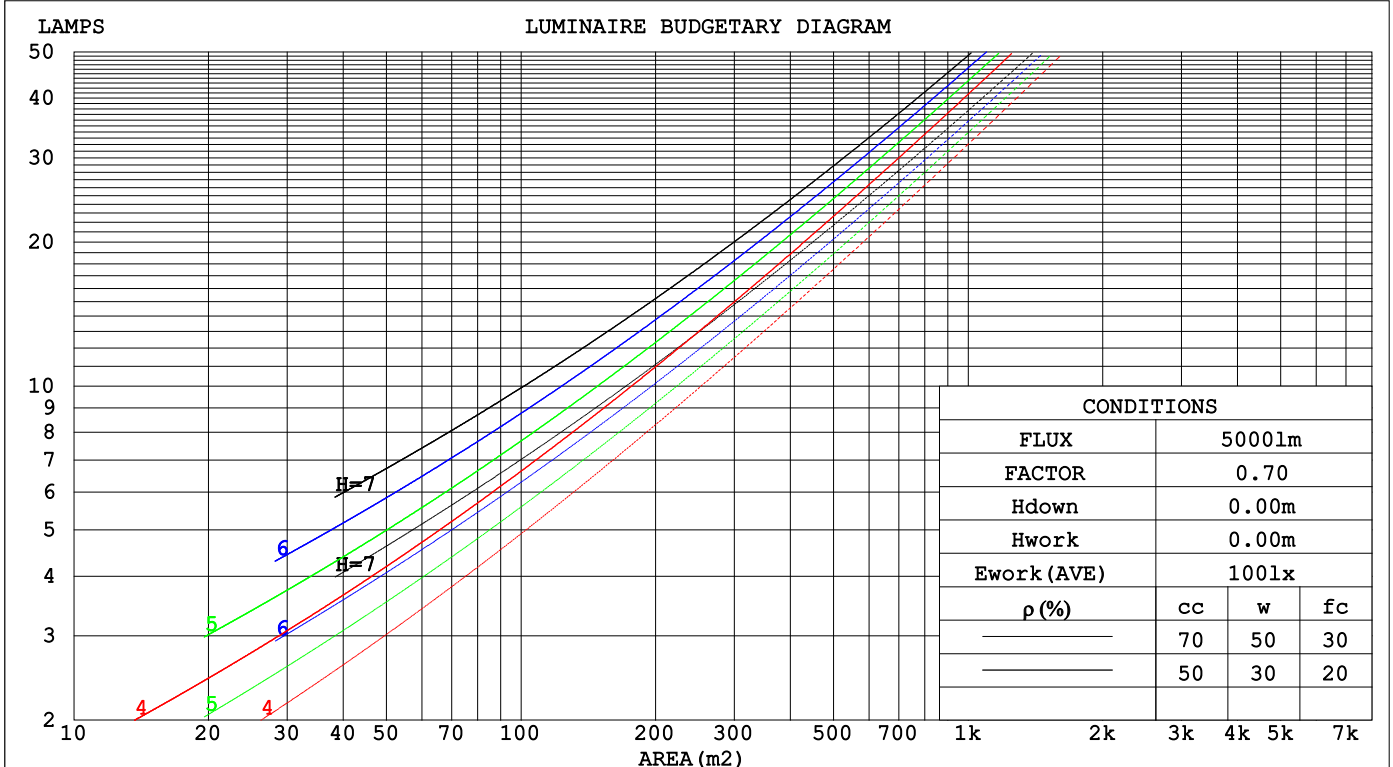

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm		
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.372	.212	.067	.356	.203	.064	.326	.187	.060	.298	.172	.055	.272	.158	.051	
2.0	.323	.177	.054	.308	.170	.052	.281	.156	.048	.255	.143	.045	.232	.131	.041	
3.0	.287	.153	.046	.274	.147	.044	.249	.135	.041	.226	.124	.038	.205	.113	.035	
4.0	.259	.135	.040	.247	.129	.038	.224	.119	.036	.203	.109	.033	.184	.100	.030	
5.0	.236	.120	.035	.225	.115	.034	.204	.106	.031	.185	.097	.029	.167	.089	.027	
6.0	.216	.109	.031	.206	.104	.030	.187	.096	.028	.169	.088	.026	.153	.080	.024	
7.0	.200	.099	.028	.191	.095	.027	.173	.087	.025	.157	.080	.023	.141	.073	.022	
8.0	.186	.091	.025	.177	.087	.025	.161	.080	.023	.146	.074	.021	.131	.067	.020	
9.0	.173	.084	.023	.165	.080	.023	.150	.074	.021	.136	.068	.020	.123	.062	.018	
10.0	.162	.078	.022	.155	.075	.021	.141	.069	.019	.128	.063	.018	.115	.058	.017	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)															
0.0	.414	.414	.414	.354	.354	.354	.242	.242	.242	.139	.139	.139	.044	.044	.044	
1.0	.410	.381	.355	.351	.327	.305	.240	.225	.211	.138	.130	.123	.044	.042	.040	
2.0	.403	.359	.321	.345	.309	.278	.237	.214	.194	.137	.124	.114	.044	.040	.037	
3.0	.396	.343	.300	.340	.296	.260	.233	.205	.182	.135	.120	.108	.043	.039	.035	
4.0	.389	.330	.286	.333	.286	.248	.229	.199	.175	.133	.117	.104	.043	.038	.034	
5.0	.381	.321	.276	.327	.278	.240	.225	.194	.170	.131	.114	.101	.042	.037	.033	
6.0	.374	.313	.269	.321	.271	.235	.222	.190	.166	.129	.112	.099	.042	.036	.033	
7.0	.367	.307	.264	.316	.266	.230	.218	.186	.163	.127	.110	.097	.041	.036	.032	
8.0	.361	.301	.260	.310	.261	.227	.215	.183	.161	.125	.108	.096	.040	.035	.032	
9.0	.355	.297	.257	.305	.257	.225	.212	.181	.159	.123	.107	.095	.040	.035	.032	
10.0	.349	.293	.255	.301	.254	.223	.209	.179	.158	.122	.106	.094	.039	.035	.031	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm										
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.5	28.0	26.9	29.4	31.1	22.7	25.2	24.1	26.6	28.3
3H	28.3	30.5	29.7	31.9	33.7	24.1	26.3	25.5	27.8	29.6
4H	29.7	31.8	31.1	33.3	35.1	24.5	26.6	26.0	28.1	29.9
6H	31.3	33.2	32.8	34.8	36.6	24.7	26.7	26.2	28.2	30.0
8H	32.2	34.1	33.7	35.6	37.5	24.7	26.6	26.2	28.1	30.0
12H	33.2	35.0	34.7	36.6	38.5	24.6	26.5	26.2	28.0	29.9
4H 2H	25.6	27.8	27.1	29.2	31.1	23.7	25.8	25.1	27.3	29.1
3H	28.6	30.5	30.1	32.0	33.9	25.4	27.2	26.9	28.8	30.6
4H	30.3	31.9	31.8	33.5	35.5	26.0	27.7	27.6	29.3	31.2
6H	32.1	33.6	33.7	35.2	37.2	26.4	27.9	28.0	29.5	31.5
8H	33.1	34.5	34.7	36.2	38.2	26.5	27.9	28.1	29.5	31.5
12H	34.4	35.6	36.0	37.3	39.3	26.5	27.7	28.1	29.4	31.4
8H 4H	30.4	31.8	32.0	33.4	35.4	27.1	28.5	28.7	30.2	32.2
6H	32.5	33.7	34.2	35.4	37.5	28.0	29.1	29.6	30.8	32.9
8H	33.8	34.9	35.5	36.6	38.6	28.3	29.3	29.9	31.0	33.1
12H	35.3	36.2	37.0	38.0	40.1	28.5	29.4	30.2	31.1	33.3
12H 4H	30.3	31.6	32.0	33.3	35.3	27.5	28.8	29.2	30.5	32.5
6H	32.6	33.6	34.3	35.3	37.4	28.6	29.7	30.3	31.4	33.5
8H	34.0	34.9	35.7	36.6	38.8	29.2	30.1	30.9	31.8	34.0
CIE190: 2010										

CIE190: 2010
Area: 0.002827 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm		
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	45	32	25	43	32	25	41	30	24	17
0.80	54	41	33	52	40	32	48	38	31	23
1.00	61	48	40	59	47	39	54	46	37	28
1.25	68	55	47	65	54	46	60	50	43	32
1.50	73	61	52	70	59	51	64	55	48	36
2.00	81	69	61	77	67	59	70	62	55	41
2.50	85	75	67	81	72	64	73	66	60	45
3.00	89	80	72	85	76	69	76	70	64	48
4.00	94	86	79	89	82	76	80	74	70	52
5.00	97	90	84	92	86	80	82	78	73	55
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2℃
 Operators: Dano
 Test Date: 2023-05-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 2.900m [K=0.8810]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm		
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

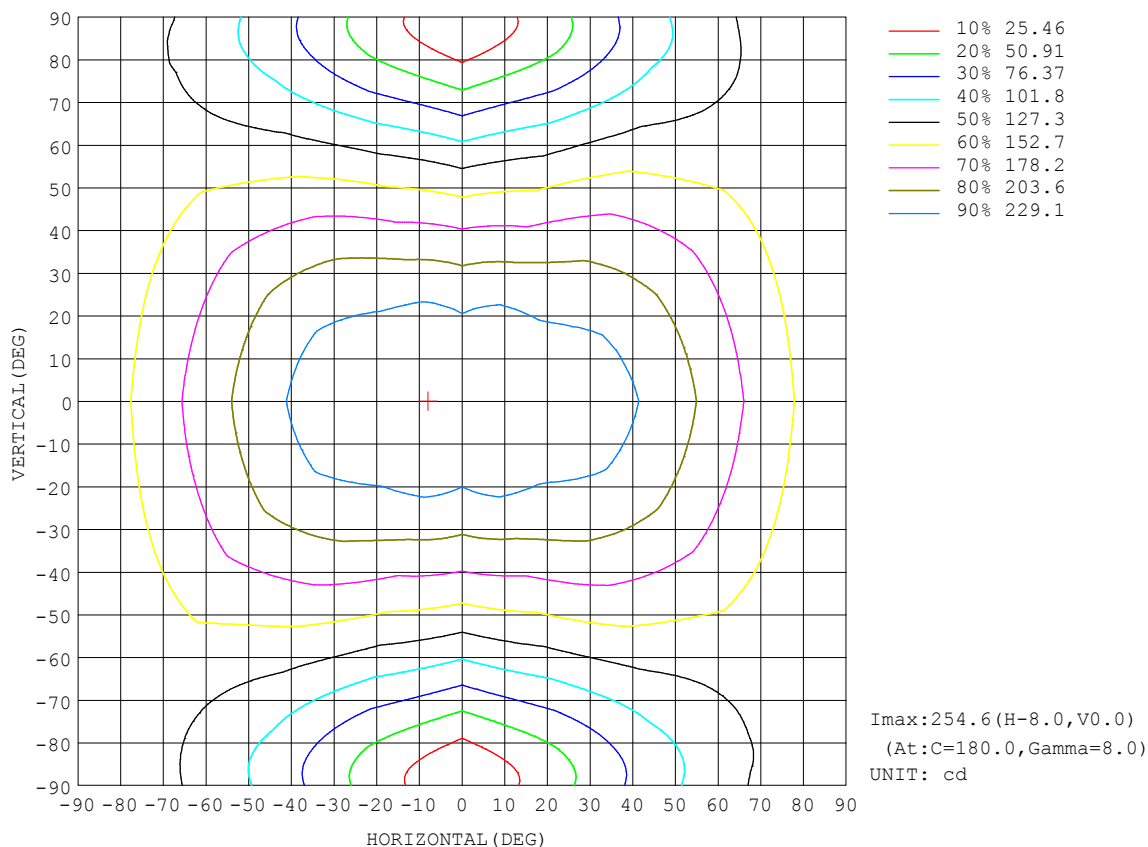


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

AAI Figure

Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm		
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

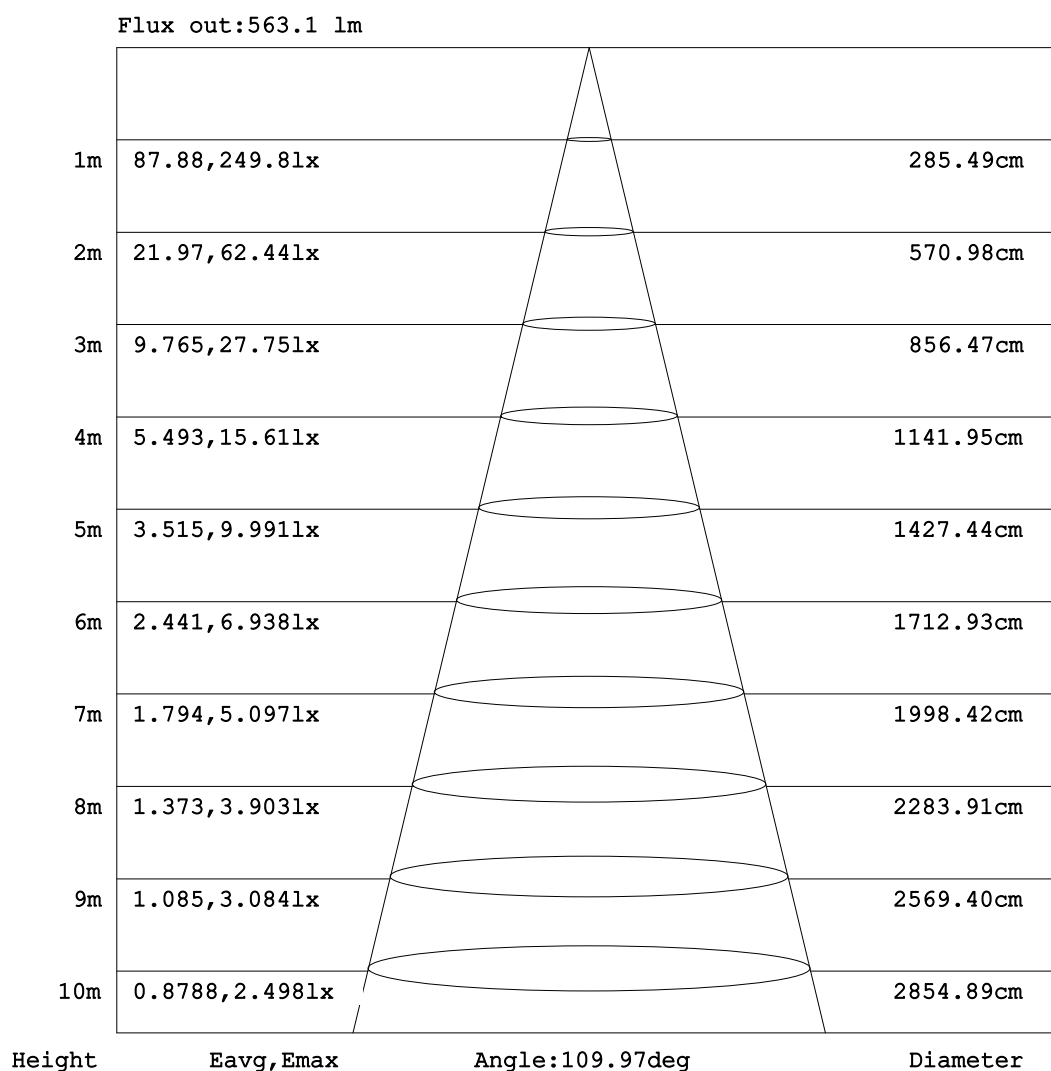


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm		
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

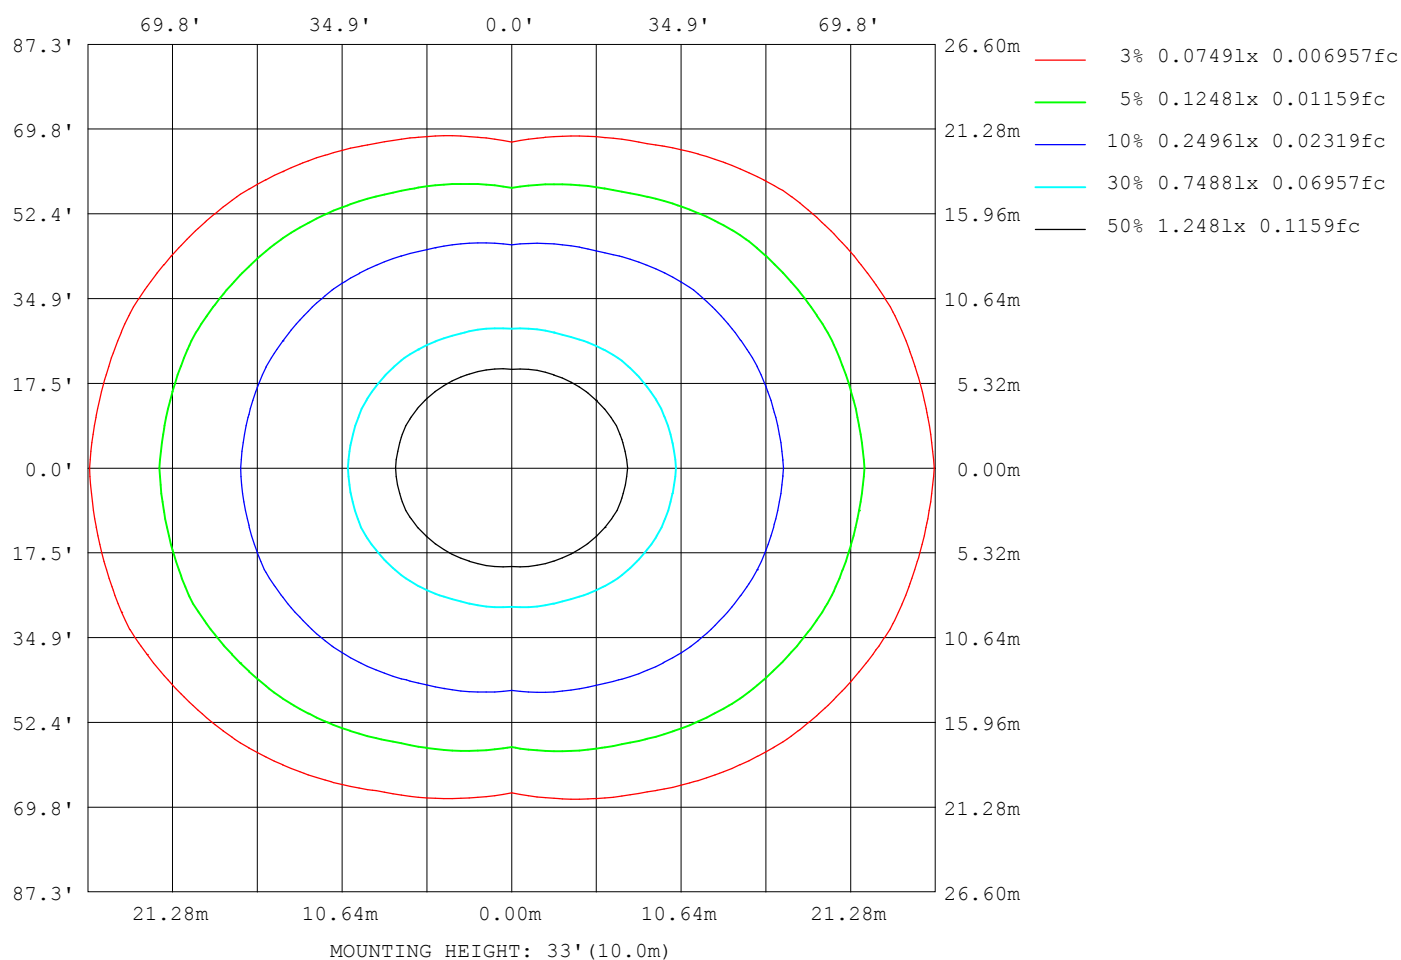

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

Planar Illuminance Curve

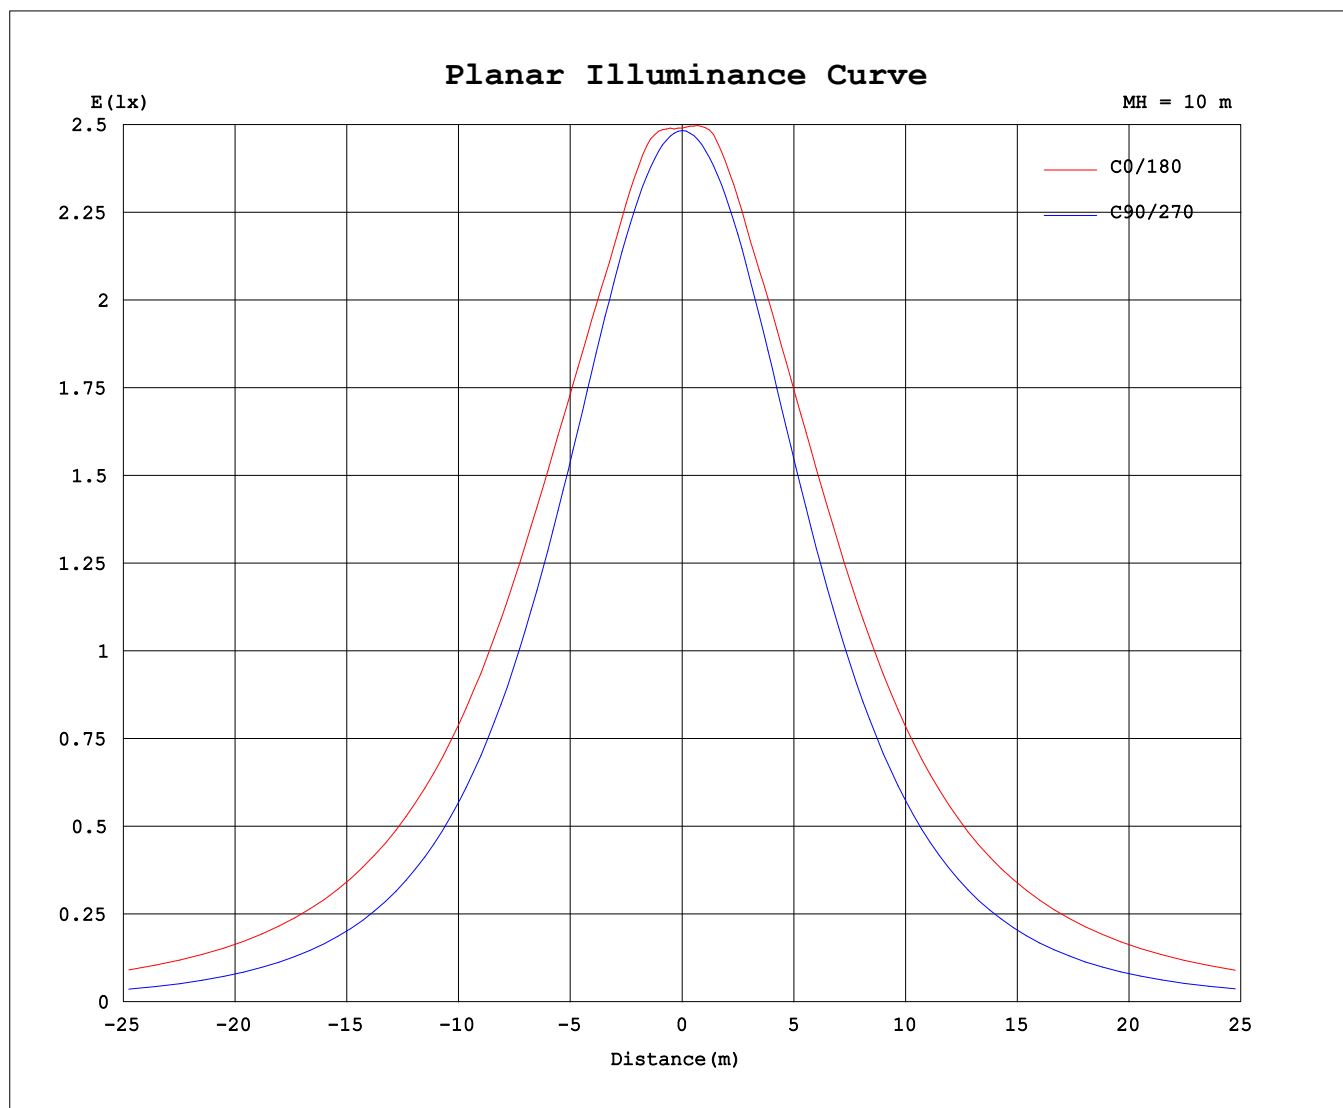

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Dano
Test Date: 2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 2.900m [K=0.8810]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.2057A P:24.55W PF:0.9939 Freq:60.01Hz Lamp Flux:1392.62x1 lm																	
NAME: VN27-24-25S-952C5-MVTD-SB002 4000K									TYPE:			WEIGHT:					
SPEC.:									DIM.:			SERIAL No.:					
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.									SUR.:			Shielding Angle:					

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	249	249	249	249	249	249	249	249	249	249	249	249	249	249	249	249			
5	251	251	249	248	247	248	250	251	252	252	250	249	247	248	249	251			
10	252	252	250	246	243	247	251	253	253	253	252	247	244	246	250	251			
15	247	247	246	242	237	243	247	249	250	249	248	244	238	242	246	246			
20	244	242	239	236	229	237	240	244	246	244	241	238	230	236	239	241			
25	242	239	231	227	219	227	232	241	244	241	234	229	220	228	231	238			
30	240	236	224	215	207	216	225	238	242	238	227	217	208	216	224	235			
35	237	231	217	201	193	202	218	233	237	232	219	204	194	202	216	230			
40	231	225	208	187	178	187	209	226	230	225	210	190	179	187	208	224			
45	223	216	198	173	161	173	198	218	222	216	199	176	162	173	199	215			
50	214	206	186	158	143	158	186	207	212	205	187	160	144	158	188	205			
55	203	194	172	142	124	141	172	196	201	193	173	144	125	142	175	194			
60	192	182	158	125	104	124	158	184	190	181	158	127	105	126	161	182			
65	180	169	143	108	82.8	107	143	172	179	169	142	109	84.2	108	146	169			
70	169	157	127	89.5	61.6	88.6	129	161	168	156	127	89.9	63.0	90.5	131	157			
75	158	145	113	71.6	40.8	70.9	115	149	158	145	113	71.9	42.1	72.9	117	146			
80	149	134	101	55.8	21.9	55.4	103	139	148	134	101	55.9	23.1	57.0	105	136			
85	143	127	91.9	44.6	6.63	44.4	95.1	131	142	127	91.6	44.4	7.40	45.7	96.4	131			
90	144	128	91.2	42.6	0.60	42.9	95.2	130	143	127	90.7	41.8	0.61	43.8	96.0	133			
95	147	132	94.6	45.8	1.20	46.2	98.7	134	147	131	94.0	44.9	1.02	47.3	99.6	136			
100	150	134	96.9	48.4	1.80	48.2	101	137	149	133	96.3	47.5	1.72	49.6	102	138			
105	150	135	98.2	44.4	2.20	44.2	102	138	150	134	97.6	43.8	2.06	45.6	103	139			
110	149	134	96.4	37.7	2.72	38.5	98.9	137	149	134	95.8	37.5	2.62	39.8	100	138			
115	146	129	87.5	29.0	3.53	32.4	90.1	133	146	129	87.4	30.6	3.72	33.5	90.3	130			
120	133	117	77.0	22.6	5.06	29.0	79.7	122	134	117	77.3	24.5	5.33	30.1	78.8	117			
125	117	103	65.5	22.1	6.85	27.8	68.3	108	119	104	66.3	23.1	7.24	28.9	67.8	101			
130	101	87.8	47.7	22.3	8.72	26.5	56.7	93.7	103	89.4	55.0	22.5	8.98	27.5	54.6	83.9			
135	84.2	72.4	34.5	22.1	10.6	25.0	45.2	78.3	86.9	74.6	44.4	22.3	10.2	25.8	45.9	70.1			
140	67.3	57.4	33.9	21.5	12.5	23.3	39.9	62.9	70.3	60.3	39.5	22.5	12.1	24.0	41.7	55.6			
145	52.8	47.4	32.8	20.7	14.1	21.5	36.8	49.7	54.9	49.1	37.3	22.8	13.9	21.9	37.0	46.9			
150	46.7	42.6	31.3	19.9	15.6	20.9	33.5	43.8	47.2	44.6	35.4	23.1	15.3	19.9	32.1	39.6			
155	40.8	31.8	28.8	19.2	17.3	20.6	29.9	38.7	41.0	39.9	33.4	24.0	16.8	18.0	27.2	34.9			
160	34.8	19.8	26.0	19.0	18.1	19.9	25.6	33.4	35.0	34.6	30.6	23.7	17.7	17.9	23.3	29.0			
165	27.6	23.7	23.2	18.6	17.1	17.9	23.2	27.9	28.9	28.9	26.6	22.4	17.6	17.9	21.4	24.4			
170	21.0	21.0	15.3	11.1	12.1	14.4	20.0	23.3	23.5	23.6	22.7	20.2	12.1	13.0	16.5	20.6			
175	16.9	12.4	9.50	10.6	11.6	12.4	13.1	18.6	16.7	16.7	19.2	12.6	11.2	12.2	13.1	13.2			
180	10.2	2.94	8.59	15.5	17.7	15.9	10.4	10.1	3.68	3.72	3.87	9.29	14.9	16.9	14.8	11.4			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks: