


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm		
NAME: VN27-24-25S-952C5-MVTD-BN 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 57.58 lm/W
MODEL		Imax (cd)	260.5	S/MH (C0/180)	1.35	
NOMINAL POWER(W)		LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1357.0	η UP,DN (C0-180)	14.3,35.4	
NOMINAL FLUX(lm)	1357.02	CIE CLASS	SEMI-D.	η UP,DN (C180-360)	14.5,35.7	
LAMPS INSIDE	1	η up (%)	28.8	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	120	η down (%)	71.2	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

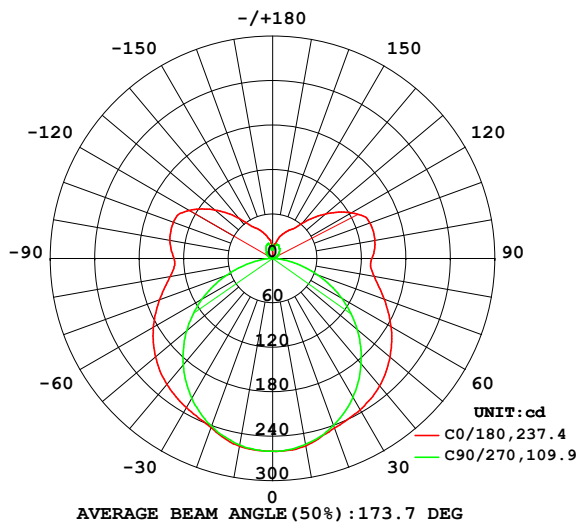

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

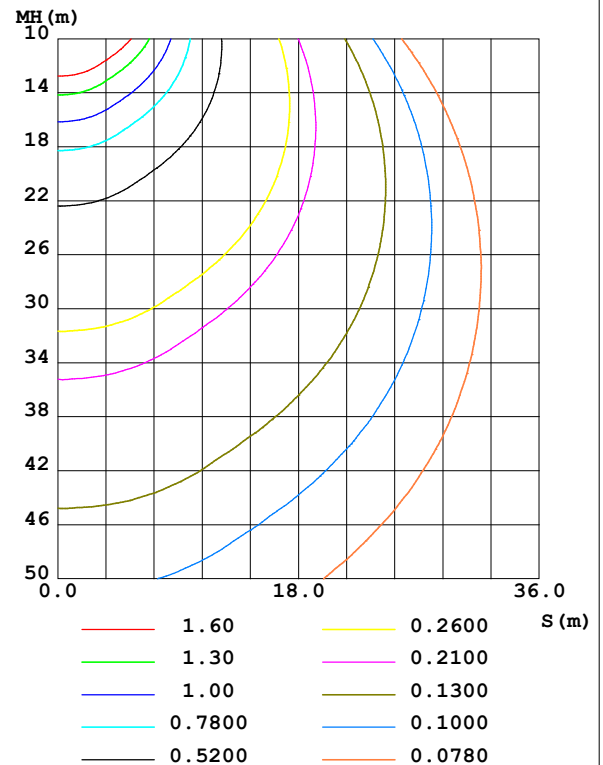

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Dano
Test Date: 2023-05-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 2.900m [K=0.8810]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	257.0	256.5	255.0	255.8	257.5	256.7	255.9	256.8	0- 10	24.66	24.66	1.82,1.82
20	243.6	241.8	240.0	242.3	243.1	242.9	241.1	241.9	10- 20	70.64	95.30	7.02,7.02
30	235.9	223.1	216.7	219.7	232.5	222.6	218.0	222.7	20- 30	107.8	203.1	15,15
40	224.4	204.9	185.8	200.0	222.1	203.4	187.8	204.3	30- 40	134.4	337.5	24.9,24.9
50	207.0	181.8	149.0	178.3	206.5	181.8	151.5	182.3	40- 50	148.1	485.6	35.8,35.8
60	184.5	154.2	107.9	152.9	186.0	155.6	110.2	155.2	50- 60	147.7	633.3	46.7,46.7
70	160.1	123.1	63.84	123.9	162.4	125.7	66.10	124.9	60- 70	133.6	766.9	56.5,56.5
80	139.1	95.39	22.81	96.58	140.5	97.40	24.40	97.54	70- 80	109.9	876.8	64.6,64.6
90	134.2	85.72	0.6659	87.26	133.2	84.92	0.5353	88.60	80- 90	88.97	965.8	71.2,71.2
100	140.1	91.38	1.901	94.45	141.0	91.99	1.969	94.35	90-100	89.19	1055	77.7,77.7
110	139.8	90.26	4.609	93.96	142.7	93.52	4.548	92.35	100-110	89.13	1144	84.3,84.3
120	123.4	72.11	7.748	76.80	130.1	77.19	7.529	71.99	110-120	76.73	1221	90,90
130	93.92	45.66	11.25	55.90	102.0	55.60	11.10	50.05	120-130	55.88	1277	94.1,94.1
140	62.11	33.09	14.97	40.68	70.46	40.96	13.56	38.31	130-140	35.90	1313	96.7,96.7
150	43.88	28.31	17.86	35.09	48.33	37.09	17.45	29.74	140-150	22.14	1335	98.4,98.4
160	32.80	23.59	20.13	28.12	37.23	32.81	20.84	23.67	150-160	13.72	1348	99.4,99.4
170	19.94	16.88	14.10	22.84	26.61	25.78	13.28	16.73	160-170	6.963	1355	99.9,99.9
180	11.78	8.757	19.69	13.27	4.433	4.703	16.31	16.25	170-180	1.612	1357	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 410.73 lm

%lum = 30.3%

%lamp = 30.3%

Conical surface Flux(120deg): 633.3 lm

%lum = 46.7%


%lamp = 46.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Dano
 Test Date:2023-05-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:2.900m [K=0.8810]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm		
NAME: VN27-24-25S-952C5-MVTD-BN 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

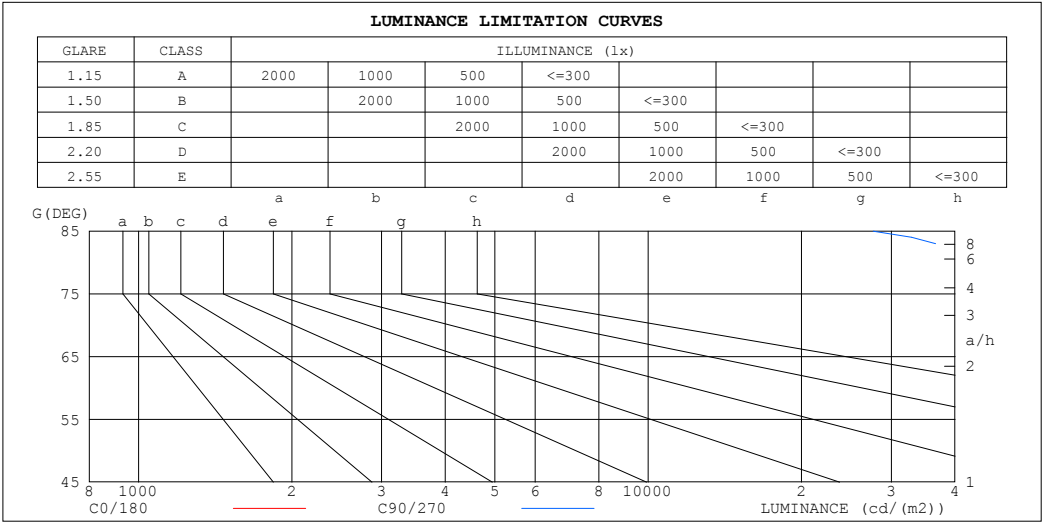

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	540160	27637
80	283713	46425
75	203554	57901
70	165889	65968
65	144260	71774
60	130737	76255
55	121126	79476
50	114094	81910
45	108437	83954


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm		
NAME: VN27-24-25S-952C5-MVTD-BN 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

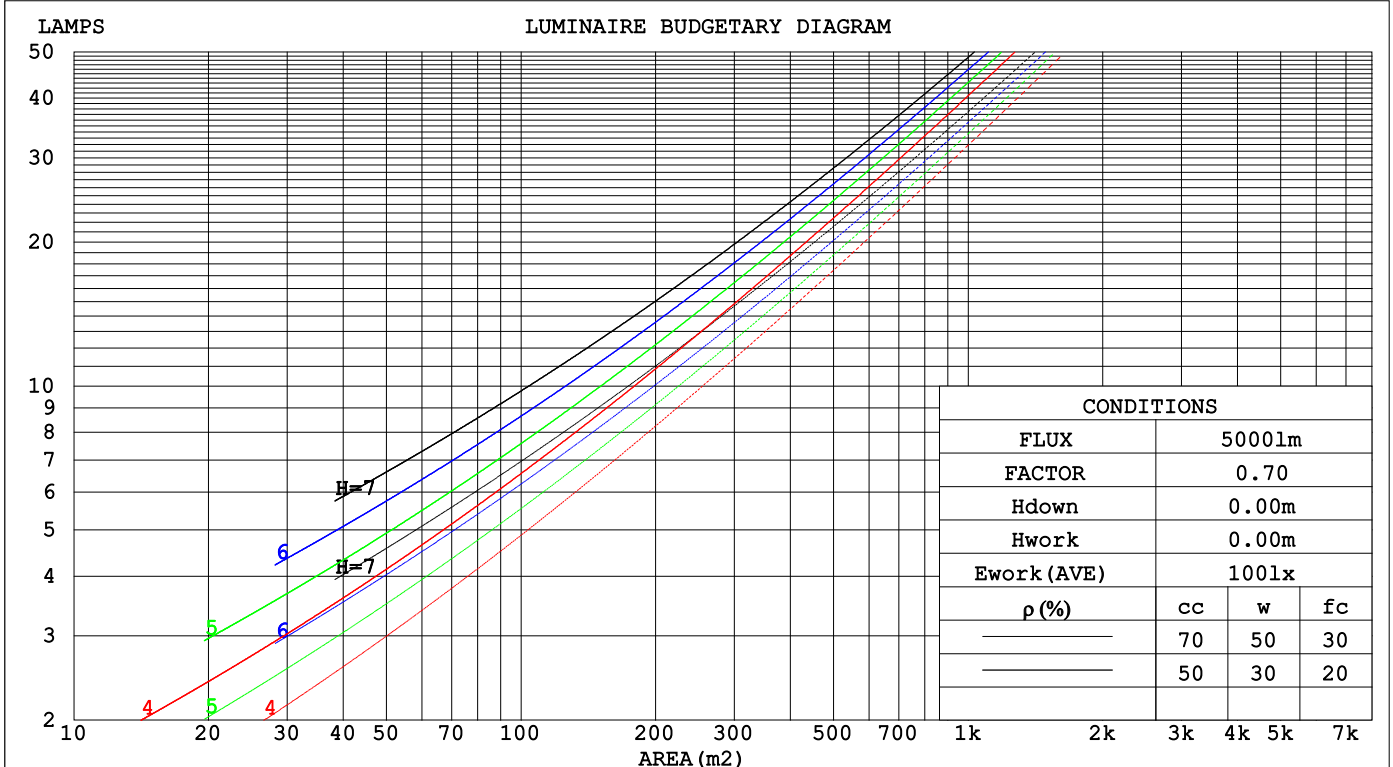

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm		
NAME: VN27-24-25S-952C5-MVTD-BN 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.368	.209	.066	.352	.201	.064	.322	.185	.059	.295	.170	.055	.270	.156	.050	
2.0	.320	.176	.054	.306	.169	.052	.279	.155	.048	.254	.142	.045	.231	.131	.041	
3.0	.286	.152	.046	.273	.146	.044	.248	.134	.041	.225	.123	.038	.204	.113	.035	
4.0	.258	.134	.039	.246	.129	.038	.224	.119	.035	.203	.109	.033	.183	.100	.030	
5.0	.235	.120	.035	.224	.115	.034	.204	.106	.031	.184	.097	.029	.167	.089	.027	
6.0	.216	.108	.031	.206	.104	.030	.187	.096	.028	.169	.088	.026	.153	.080	.024	
7.0	.199	.099	.028	.190	.095	.027	.173	.087	.025	.157	.080	.023	.141	.073	.022	
8.0	.185	.090	.025	.177	.087	.025	.161	.080	.023	.146	.074	.021	.131	.067	.020	
9.0	.173	.083	.023	.165	.080	.023	.150	.074	.021	.136	.068	.020	.123	.062	.018	
10.0	.162	.078	.022	.154	.075	.021	.141	.069	.019	.128	.063	.018	.115	.058	.017	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)															
0.0	.410	.410	.410	.351	.351	.351	.239	.239	.239	.137	.137	.137	.044	.044	.044	
1.0	.406	.377	.351	.347	.324	.302	.238	.223	.209	.137	.129	.122	.044	.041	.039	
2.0	.399	.355	.318	.342	.305	.274	.234	.211	.191	.135	.123	.112	.043	.040	.037	
3.0	.392	.339	.296	.336	.292	.257	.231	.203	.180	.133	.118	.106	.043	.038	.035	
4.0	.384	.326	.282	.330	.282	.245	.227	.197	.173	.131	.115	.102	.042	.037	.034	
5.0	.377	.317	.272	.324	.274	.237	.223	.191	.167	.129	.112	.099	.042	.037	.033	
6.0	.370	.309	.265	.318	.268	.231	.219	.187	.164	.127	.110	.097	.041	.036	.032	
7.0	.363	.303	.260	.312	.262	.227	.216	.184	.161	.125	.108	.096	.040	.035	.032	
8.0	.356	.297	.256	.307	.258	.224	.212	.181	.159	.123	.107	.095	.040	.035	.031	
9.0	.350	.292	.253	.302	.254	.221	.209	.178	.157	.122	.105	.094	.039	.035	.031	
10.0	.345	.288	.251	.297	.250	.219	.206	.176	.156	.120	.104	.093	.039	.034	.031	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm											
NAME: VN27-24-25S-952C5-MVTD-BN 5000K						TYPE:			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.						SUR.:			Shielding Angle:		
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	25.4	27.9	26.8	29.3	31.0	22.7	25.1	24.0	26.5	28.2
	3H	28.1	30.3	29.5	31.8	33.5	24.1	26.3	25.5	27.8	29.5
	4H	29.5	31.6	30.9	33.1	34.8	24.5	26.6	26.0	28.1	29.9
	6H	31.0	33.0	32.5	34.5	36.3	24.7	26.7	26.2	28.2	30.0
	8H	31.9	33.8	33.4	35.3	37.2	24.7	26.6	26.2	28.2	30.0
	12H	32.9	34.7	34.4	36.3	38.2	24.7	26.5	26.2	28.0	29.9
4H	2H	25.6	27.7	27.0	29.1	30.9	23.6	25.7	25.0	27.2	29.0
	3H	28.5	30.3	30.0	31.8	33.7	25.3	27.1	26.8	28.7	30.5
	4H	30.1	31.7	31.6	33.3	35.2	25.9	27.6	27.5	29.2	31.1
	6H	31.9	33.3	33.4	35.0	36.9	26.3	27.8	27.9	29.4	31.4
	8H	32.9	34.3	34.5	35.9	37.9	26.4	27.8	28.0	29.4	31.4
	12H	34.1	35.3	35.7	37.0	39.0	26.4	27.7	28.0	29.3	31.3
8H	4H	30.2	31.6	31.8	33.2	35.2	27.0	28.4	28.6	30.0	32.0
	6H	32.3	33.5	33.9	35.1	37.2	27.8	29.0	29.4	30.7	32.7
	8H	33.5	34.6	35.2	36.3	38.3	28.1	29.1	29.7	30.8	32.9
	12H	35.0	35.9	36.7	37.7	39.8	28.2	29.2	29.9	30.9	33.0
12H	4H	30.1	31.4	31.8	33.1	35.1	27.4	28.6	29.0	30.3	32.3
	6H	32.3	33.4	34.0	35.1	37.2	28.4	29.5	30.1	31.2	33.3
	8H	33.7	34.6	35.4	36.3	38.5	28.9	29.9	30.6	31.6	33.7
CIE190: 2010											

CIE190: 2010
Area: 0.002827 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm		
NAME: VN27-24-25S-952C5-MVTD-BN 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	45	33	26	44	32	25	41	31	25	18
0.80	54	41	33	52	40	33	49	38	31	23
1.00	62	49	40	59	47	40	55	47	38	28
1.25	69	56	47	66	54	46	61	51	44	33
1.50	74	62	53	71	59	51	65	55	49	37
2.00	81	70	62	77	67	60	70	62	56	42
2.50	86	75	67	82	72	65	74	66	60	46
3.00	90	80	73	85	77	70	77	70	65	49
4.00	94	86	80	89	82	76	81	75	70	53
5.00	97	90	84	92	86	81	83	78	74	55
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2℃
 Operators: Dano
 Test Date: 2023-05-31

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 2.900m [K=0.8810]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm		
NAME: VN27-24-25S-952C5-MVTD-BN 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

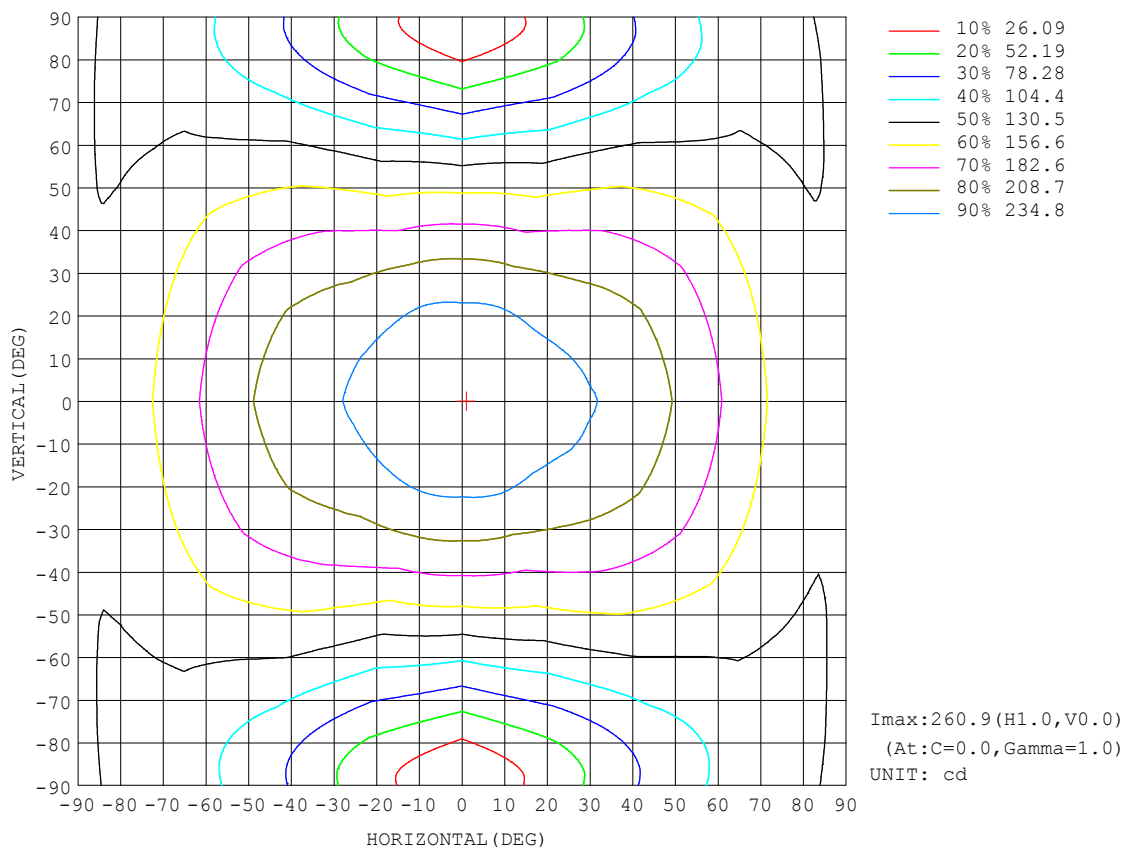


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

AAI Figure

Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm		
NAME: VN27-24-25S-952C5-MVTD-BN 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

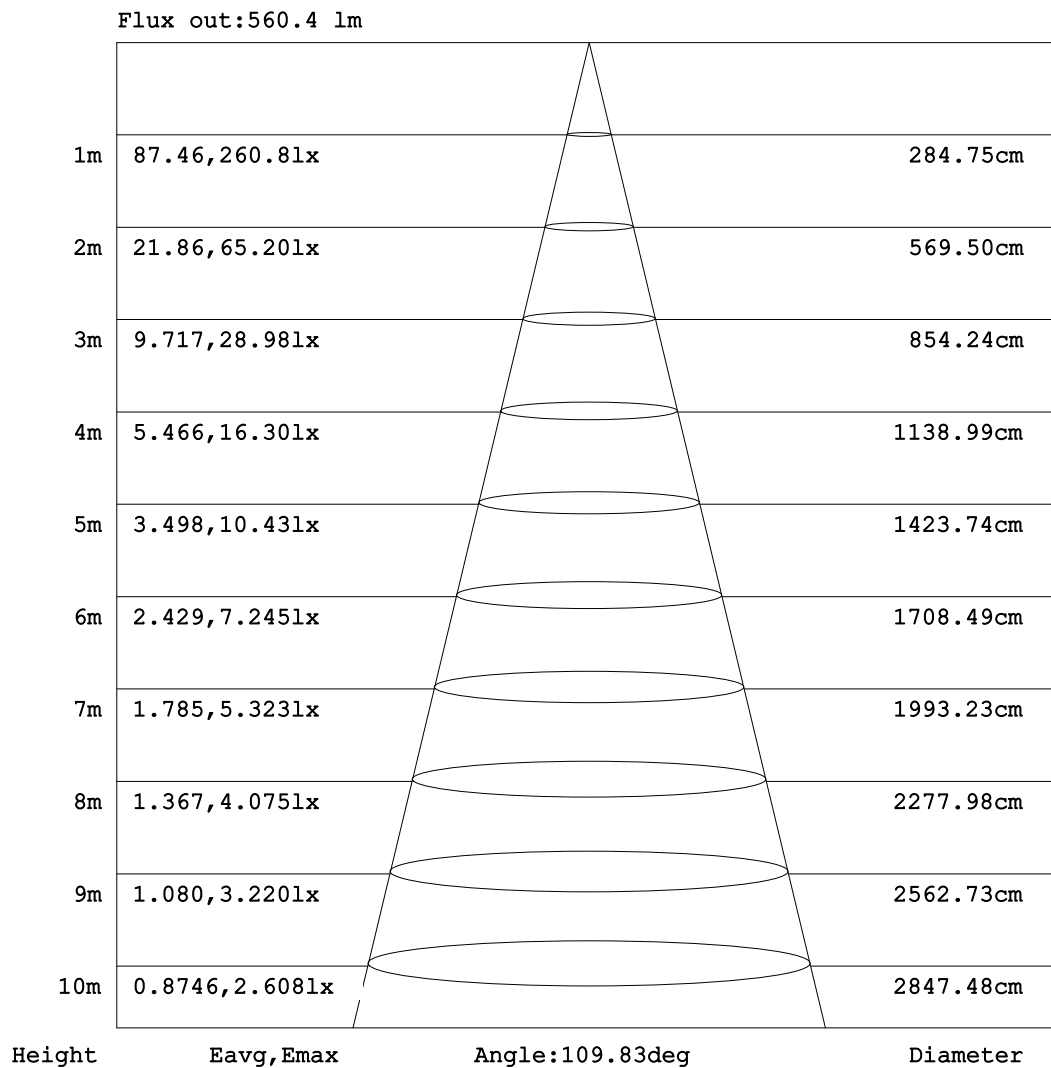


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm		
NAME: VN27-24-25S-952C5-MVTD-BN 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

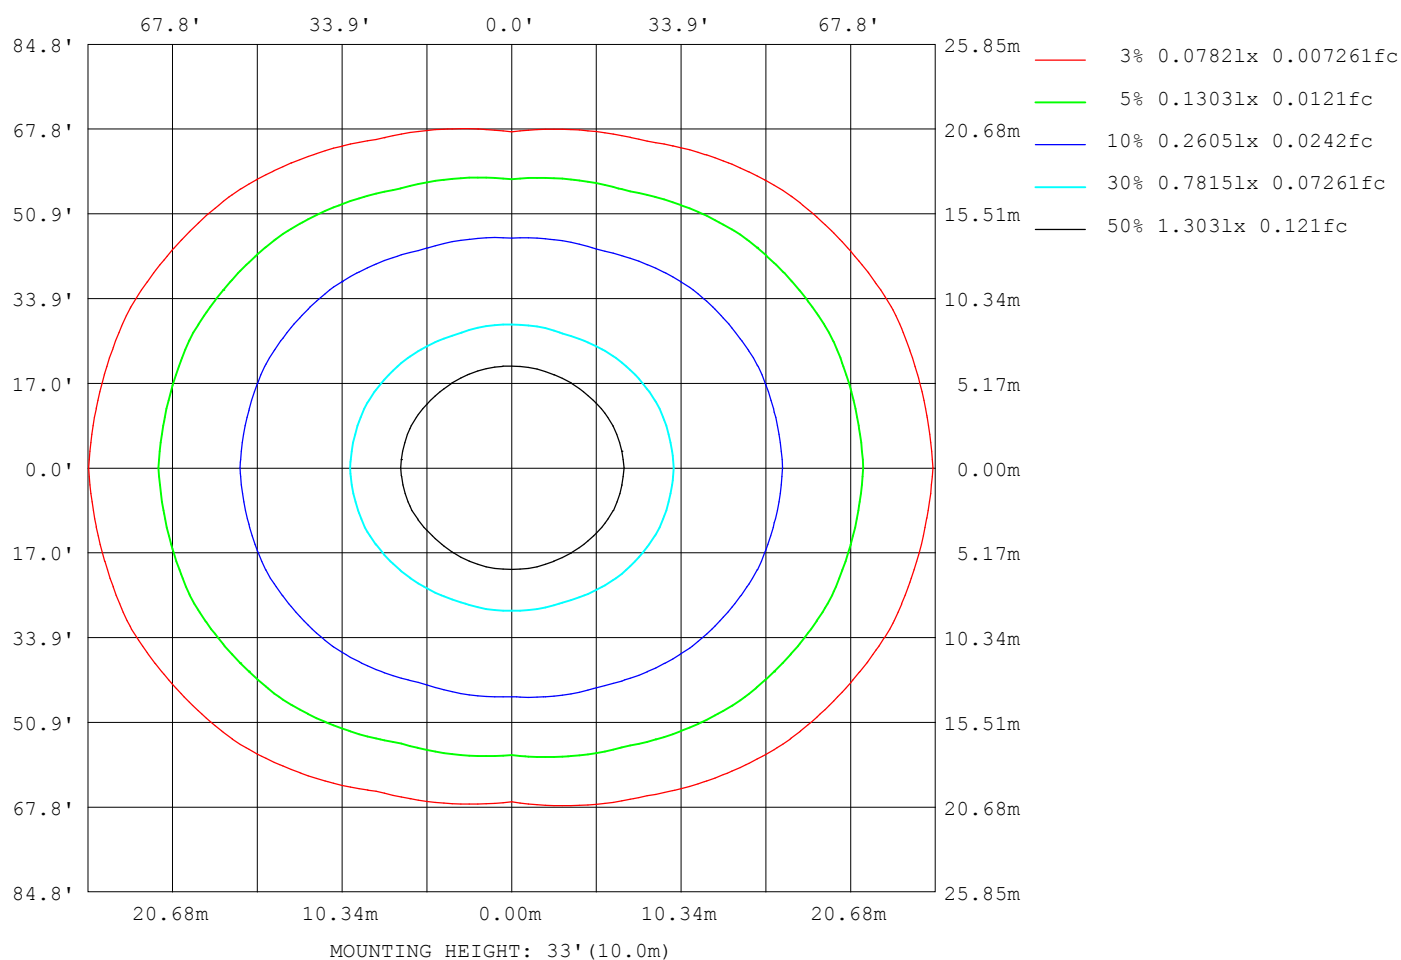

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

Planar Illuminance Curve

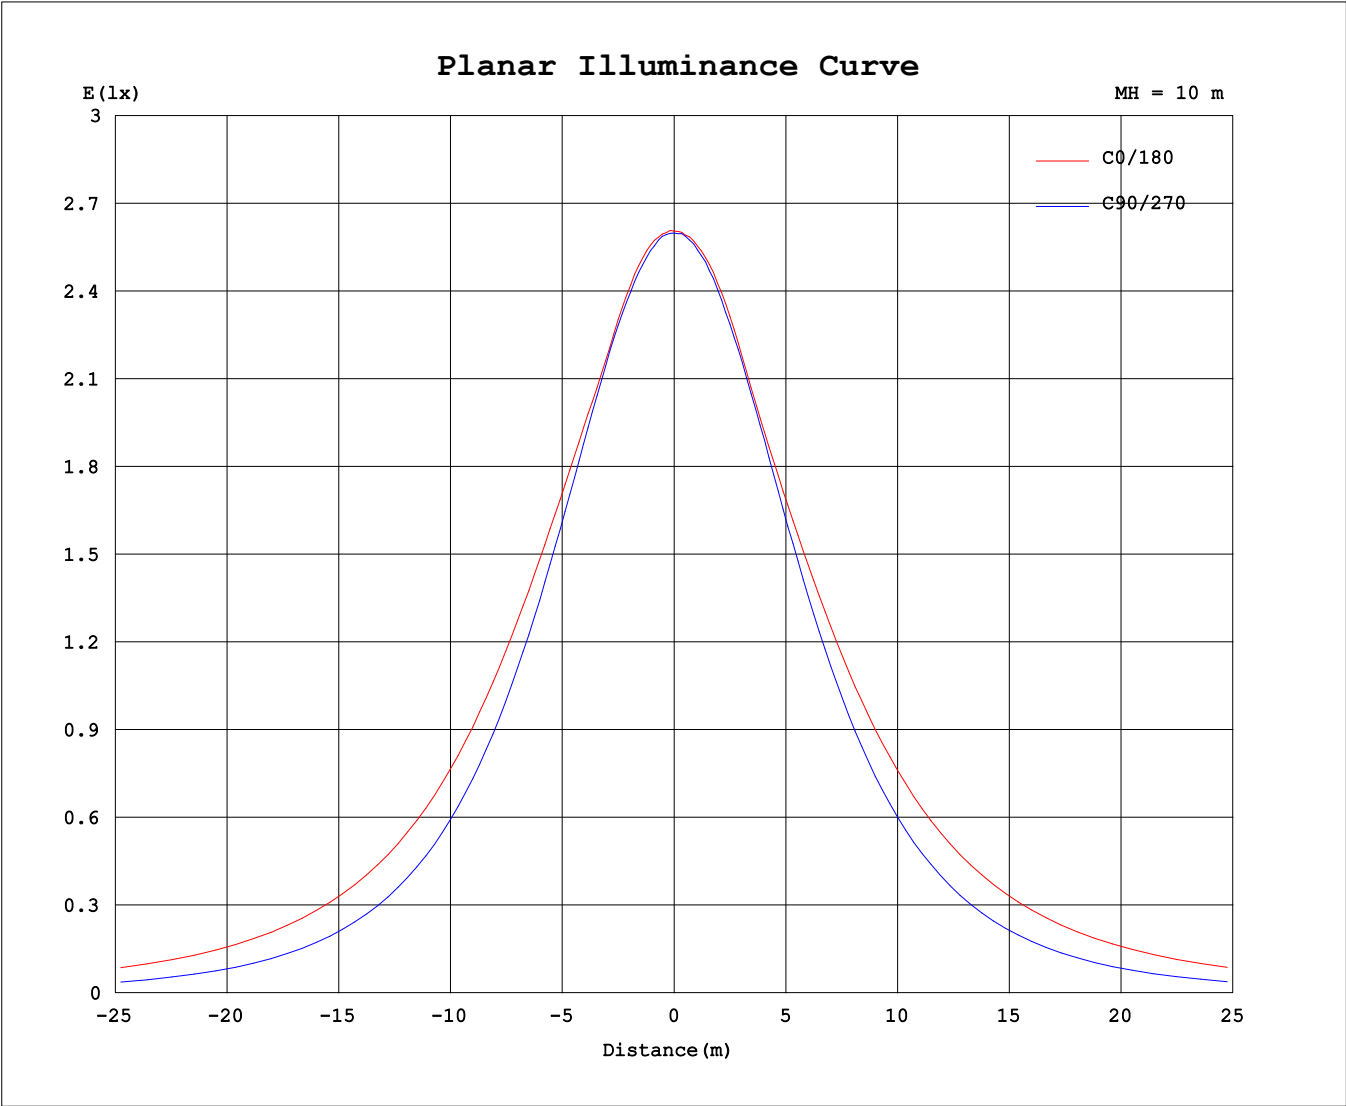

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1972A P:23.57W PF:0.9949 Freq:60.01Hz Lamp Flux:1357.02x1 lm		
NAME: VN27-24-25S-952C5-MVTD-BN 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	260	260	260	260	260	260	260	260	260	260	260	260	260	260	260	260			
5	260	260	259	259	259	259	259	259	260	259	259	259	259	259	259	260			
10	257	257	257	255	255	255	256	257	257	257	257	255	256	256	257	257			
15	250	250	251	250	249	249	251	251	252	252	252	250	249	250	251	251			
20	244	242	242	242	240	241	242	242	243	243	243	242	241	242	242	243			
25	240	237	232	231	229	231	231	235	237	235	232	233	231	232	232	238			
30	236	232	223	218	217	218	220	229	232	230	223	220	218	219	223	232			
35	231	227	214	204	202	204	210	223	228	224	213	206	204	204	214	226			
40	224	219	205	188	186	188	200	216	222	217	203	190	188	189	204	219			
45	216	210	194	173	168	170	190	208	215	209	193	173	170	172	194	211			
50	207	200	182	157	149	153	178	199	207	200	182	157	151	156	182	201			
55	196	188	168	141	129	136	166	189	197	190	169	141	131	140	169	190			
60	185	176	154	124	108	119	153	177	186	178	156	124	110	123	155	178			
65	172	163	139	106	85.8	102	139	165	174	165	141	107	88.2	105	140	165			
70	160	149	123	88.1	63.8	84.5	124	152	162	152	126	89.5	66.1	87.5	125	152			
75	149	137	108	70.1	42.4	67.4	109	140	151	140	111	71.9	44.2	69.6	110	139			
80	139	126	95.4	53.8	22.8	51.6	96.6	129	140	129	97.4	55.3	24.4	53.2	97.5	129			
85	133	119	86.5	42.4	6.82	39.9	87.8	122	134	120	87.6	43.0	7.92	41.5	89.0	122			
90	134	120	85.7	40.5	0.67	38.3	87.3	121	133	119	84.9	39.5	0.54	39.6	88.6	123			
95	138	123	89.0	43.5	1.32	42.1	91.4	126	138	123	88.9	43.2	1.16	42.9	92.1	127			
100	140	126	91.4	45.9	1.90	44.5	94.5	129	141	126	92.0	46.4	1.97	44.9	94.3	129			
105	141	126	92.5	41.9	3.28	41.4	96.3	131	143	128	94.1	44.0	3.31	41.2	95.8	130			
110	140	126	90.3	35.8	4.61	36.7	94.0	131	143	128	93.5	38.6	4.55	35.8	92.3	129			
115	136	121	81.8	27.8	6.09	31.3	86.3	126	141	126	86.3	32.6	5.91	29.8	83.3	123			
120	123	109	72.1	21.3	7.75	28.4	76.8	116	130	115	77.2	26.1	7.53	27.2	72.0	111			
125	109	95.7	59.2	20.8	9.44	27.6	66.6	103	117	103	67.0	23.1	9.32	26.1	60.8	97.9			
130	93.9	81.6	45.7	21.2	11.3	26.6	55.9	89.2	102	89.2	55.6	19.9	11.1	24.9	50.1	83.0			
135	77.8	67.1	38.0	21.7	13.2	25.5	46.0	74.9	86.6	75.4	46.3	20.3	12.1	23.5	42.1	65.4			
140	62.1	53.3	33.1	21.6	15.0	24.5	40.7	59.1	70.5	61.5	41.0	21.6	13.6	22.0	38.3	52.4			
145	49.2	44.9	30.1	21.1	16.3	23.7	38.3	49.7	56.3	50.4	38.8	23.4	15.6	20.7	34.1	42.5			
150	43.9	35.9	28.3	20.8	17.9	23.2	35.1	44.7	48.3	45.9	37.1	25.2	17.4	19.6	29.7	39.6			
155	38.4	28.7	26.3	20.4	19.3	23.1	31.9	39.6	42.9	41.7	35.4	25.9	19.7	17.5	25.8	33.8			
160	32.8	27.7	23.6	20.9	20.1	22.9	28.1	33.8	37.2	36.9	32.8	25.9	20.8	19.4	23.7	28.3			
165	26.0	23.5	23.0	20.9	18.9	20.6	25.6	29.6	31.4	31.4	29.1	25.3	20.9	19.3	21.4	25.2			
170	19.9	22.2	16.9	13.3	14.1	16.8	22.8	26.1	26.6	26.7	25.8	23.6	13.3	13.3	16.7	20.8			
175	16.6	14.1	11.3	12.4	13.6	14.5	15.2	20.9	19.5	19.7	22.0	13.8	11.7	12.6	13.5	13.9			
180	11.8	3.19	8.76	16.8	19.7	17.5	13.3	9.85	4.43	4.48	4.70	9.91	16.3	18.5	16.2	13.3			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Dano
Test Date:2023-05-31

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:2.900m [K=0.8810]
Remarks: