
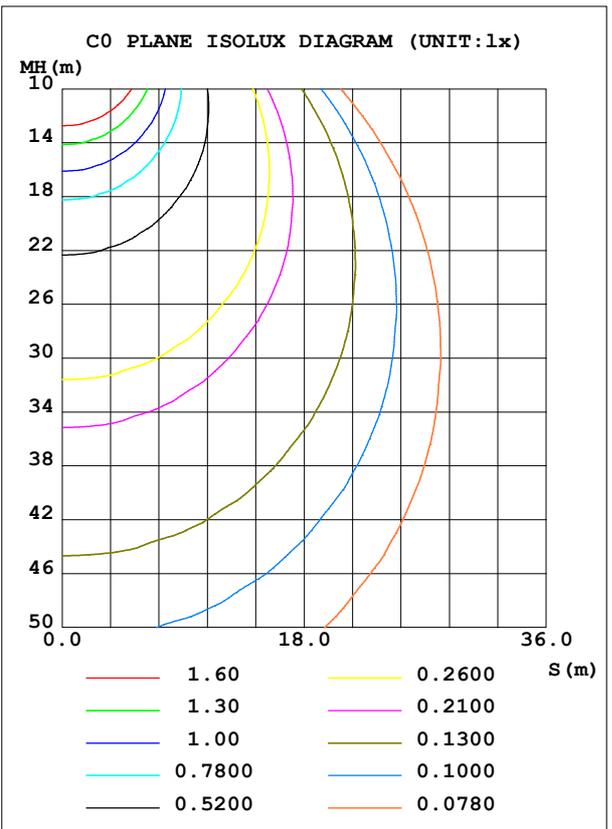


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 57.98 lm/W
MODEL		I _{max} (cd)	260.6	S/MH (C0/180)	1.26	
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)	1.26	
RATED VOLTAGE (V)	100-277	TOTAL FLUX (lm)	742.08	η UP, DN (C0-180)	0.0, 50.0	
NOMINAL FLUX (lm)	742.082	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

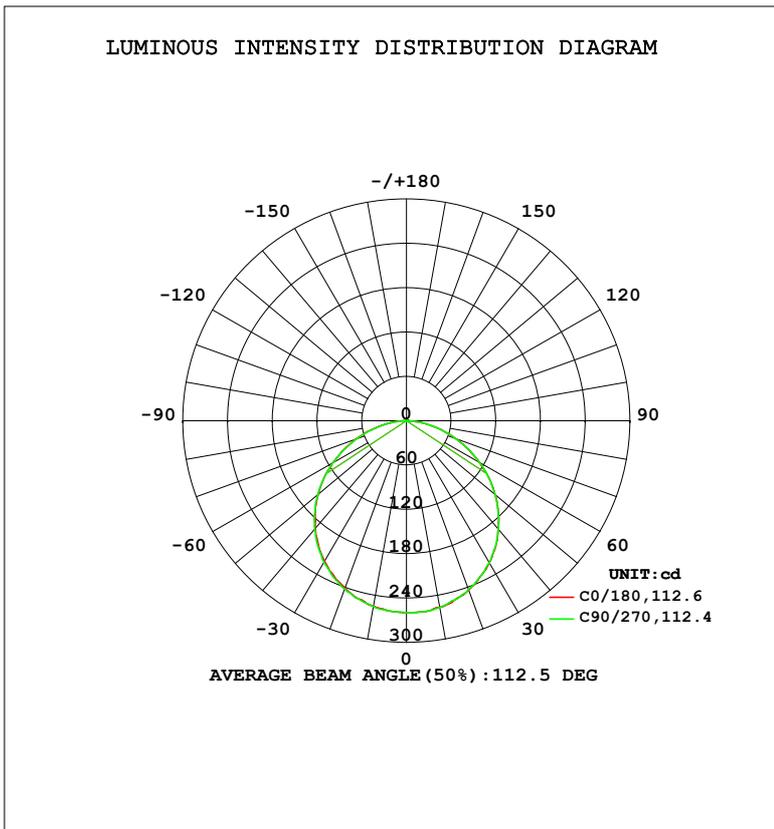

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2 °C
 Operators: Ethan
 Test Date: 2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	256.1	256.6	256.6	254.2	254.7	254.4	255.1	254.8	0- 10	24.59	24.59	3.31,3.31
20	244.0	243.7	243.1	242.0	241.5	240.9	242.4	242.1	10- 20	70.58	95.16	12.8,12.8
30	222.3	221.8	222.4	219.8	220.1	219.4	221.4	220.8	20- 30	107.3	202.4	27.3,27.3
40	192.0	192.2	191.8	190.5	190.5	189.7	191.8	191.4	30- 40	129.6	332.0	44.7,44.7
50	155.5	155.0	156.0	154.4	154.7	154.4	155.3	155.6	40- 50	134.2	466.2	62.8,62.8
60	113.6	113.4	114.0	113.5	114.3	113.5	113.8	114.0	50- 60	120.5	586.7	79.1,79.1
70	69.73	69.11	69.61	70.85	71.40	70.19	70.26	70.36	60- 70	91.01	677.7	91.3,91.3
80	28.24	27.70	28.28	29.71	30.41	28.69	28.50	28.86	70- 80	51.76	729.5	98.3,98.3
90	0	0	0	0	0	0	0	0	80- 90	12.54	742.0	100,100
100	0	0	0	0	0	0	0	0	90-100	0	742.0	100,100
110	0	0	0	0	0	0	0	0	100-110	0	742.0	100,100
120	0	0	0	0	0	0	0	0	110-120	0	742.0	100,100
130	0	0	0	0	0	0	0	0	120-130	0	742.0	100,100
140	0	0	0	0	0	0	0	0	130-140	0.0004	742.0	100,100
150	0	0	0	0	0	0	0.0919	0	140-150	0.0020	742.0	100,100
160	0	0	0	0	0.0896	0.2672	0.0900	0.0897	150-160	0.0169	742.0	100,100
170	0.1773	0.2654	0	0	0.1792	0.1794	0.3595	0.3583	160-170	0.0274	742.1	100,100
180	0.3585	0.1794	0.0890	0.1794	0.1792	0.2690	0.3600	0.2690	170-180	0.0221	742.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 399.66 lm

%lum = 53.9%
 %lamp = 53.9%

Conical surface Flux(120deg): 586.7 lm


%lum = 79.1%
 %lamp = 79.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

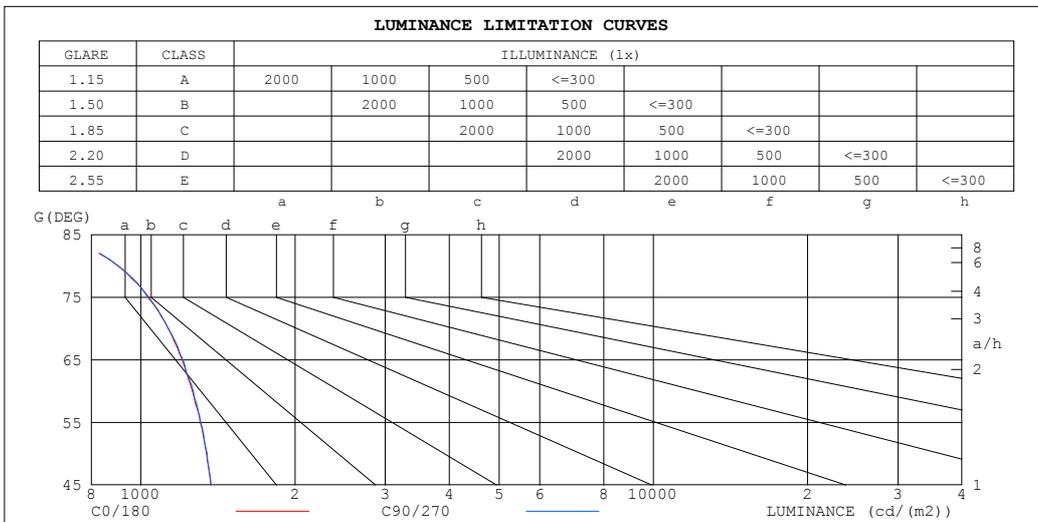

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	633	661
80	903	905
75	1037	1032
70	1132	1131
65	1204	1209
60	1261	1266
55	1306	1310
50	1343	1348
45	1371	1369


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization (CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.90	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.74	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.54	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

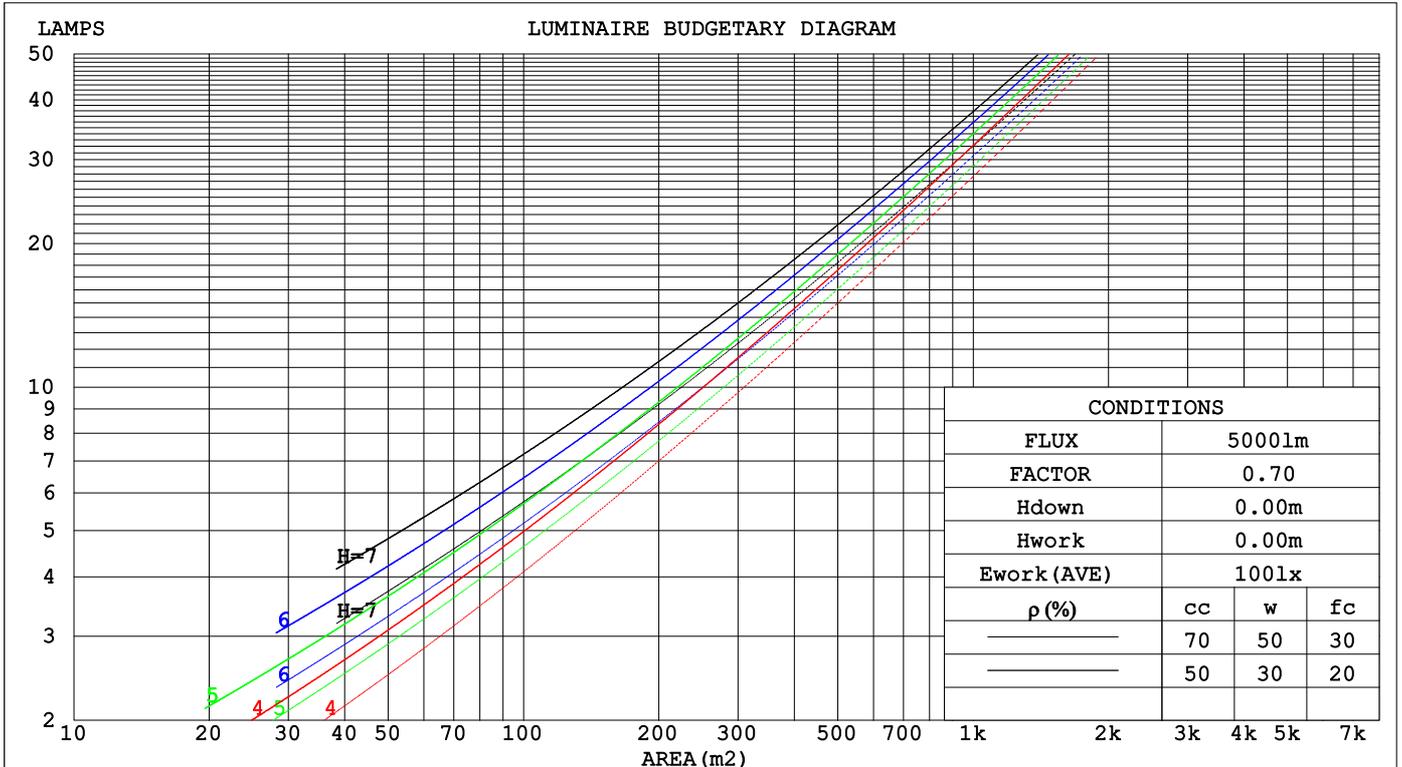

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

WEC AND CCEC

Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.055	.301	.171	.054	.287	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.291	.159	.049	.284	.157	.048	.273	.152	.047	.262	.147	.046	.252	.142	.045	
3.0	.269	.143	.043	.264	.141	.043	.253	.137	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.213	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.025	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.074	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.8	15.3	14.1	15.5	15.7	13.8	15.3	14.1	15.5	15.7
3H	15.3	16.7	15.6	16.9	17.1	15.3	16.7	15.6	16.9	17.1
4H	15.8	17.2	16.2	17.4	17.7	15.8	17.2	16.1	17.4	17.7
6H	16.2	17.5	16.6	17.8	18.0	16.2	17.5	16.6	17.8	18.0
8H	16.3	17.6	16.7	17.8	18.1	16.3	17.6	16.7	17.8	18.1
12H	16.4	17.6	16.7	17.9	18.2	16.4	17.6	16.7	17.8	18.2
4H 2H	14.4	15.7	14.7	16.0	16.2	14.4	15.7	14.7	16.0	16.2
3H	16.0	17.2	16.4	17.5	17.8	16.0	17.2	16.4	17.5	17.8
4H	16.7	17.8	17.1	18.1	18.5	16.7	17.8	17.1	18.1	18.4
6H	17.2	18.2	17.6	18.5	18.9	17.2	18.2	17.6	18.5	18.9
8H	17.4	18.3	17.8	18.7	19.0	17.4	18.3	17.8	18.6	19.0
12H	17.5	18.3	17.9	18.7	19.1	17.5	18.3	17.9	18.7	19.1
8H 4H	17.0	17.9	17.4	18.2	18.6	17.0	17.8	17.4	18.2	18.6
6H	17.6	18.4	18.1	18.8	19.2	17.6	18.3	18.1	18.7	19.2
8H	17.9	18.5	18.3	18.9	19.4	17.8	18.5	18.3	18.9	19.4
12H	18.0	18.6	18.5	19.0	19.5	18.0	18.5	18.5	19.0	19.5
12H 4H	17.0	17.8	17.4	18.2	18.6	17.0	17.8	17.4	18.2	18.6
6H	17.7	18.3	18.1	18.7	19.2	17.7	18.3	18.1	18.7	19.2
8H	17.9	18.5	18.4	18.9	19.4	17.9	18.5	18.4	18.9	19.4

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.2	+ 0.2 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3

CIE Pub.117, 742.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.0)
Area: 0.18 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	87	77	71	84	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

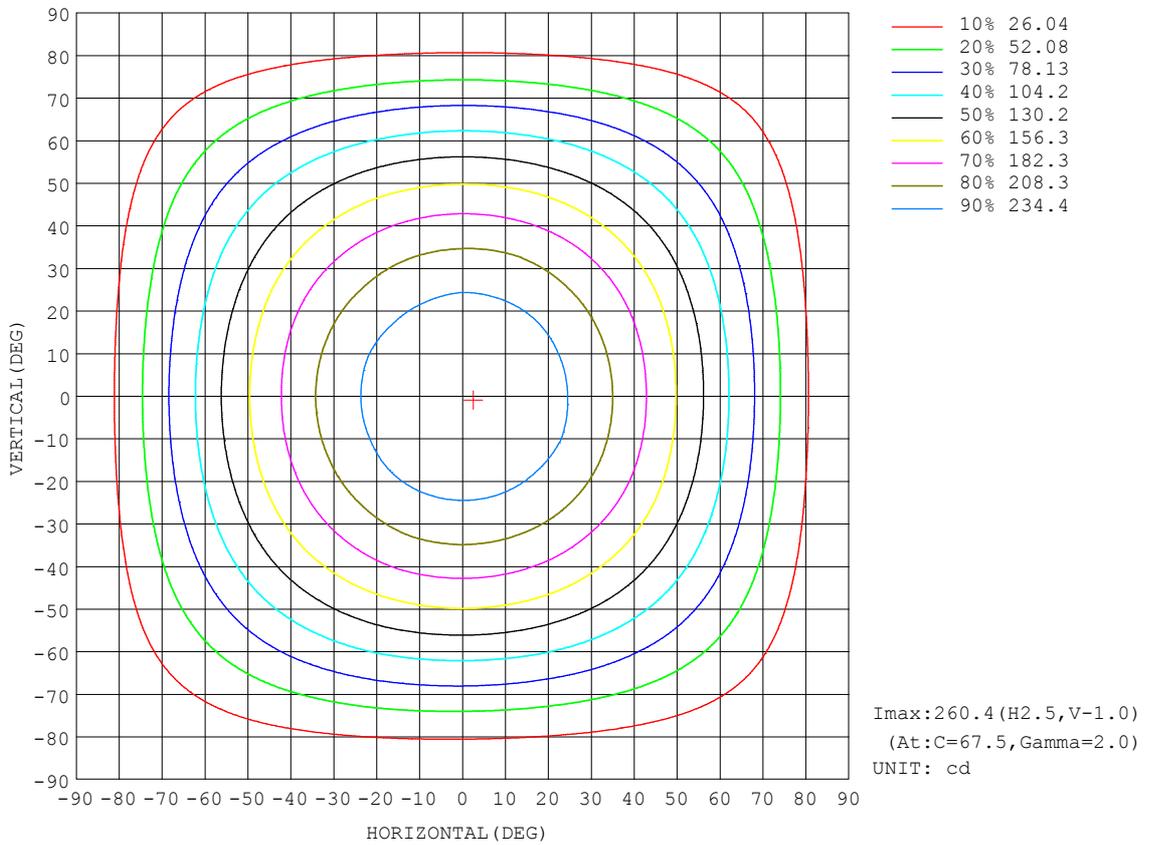


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

AAI Figure

Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

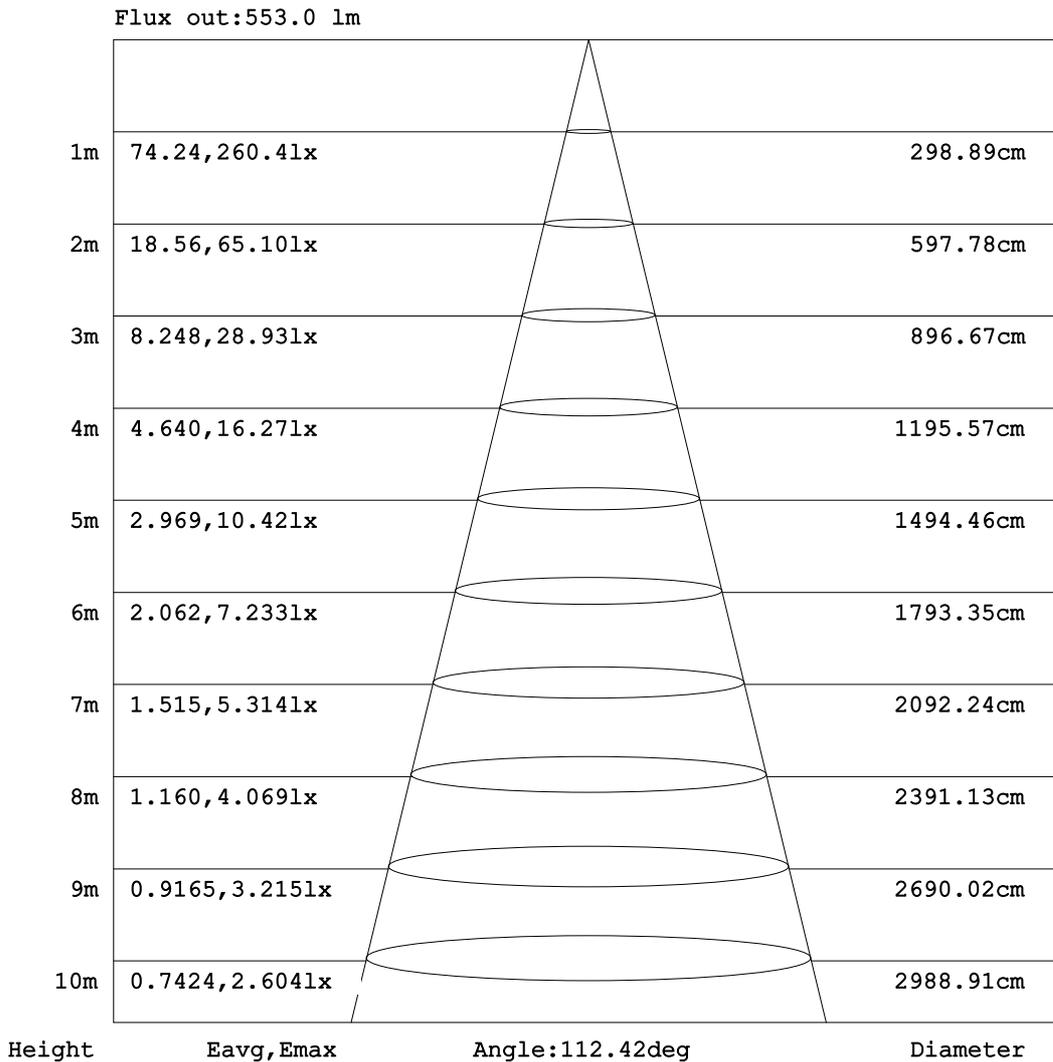


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOLUX DIAGRAM


Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

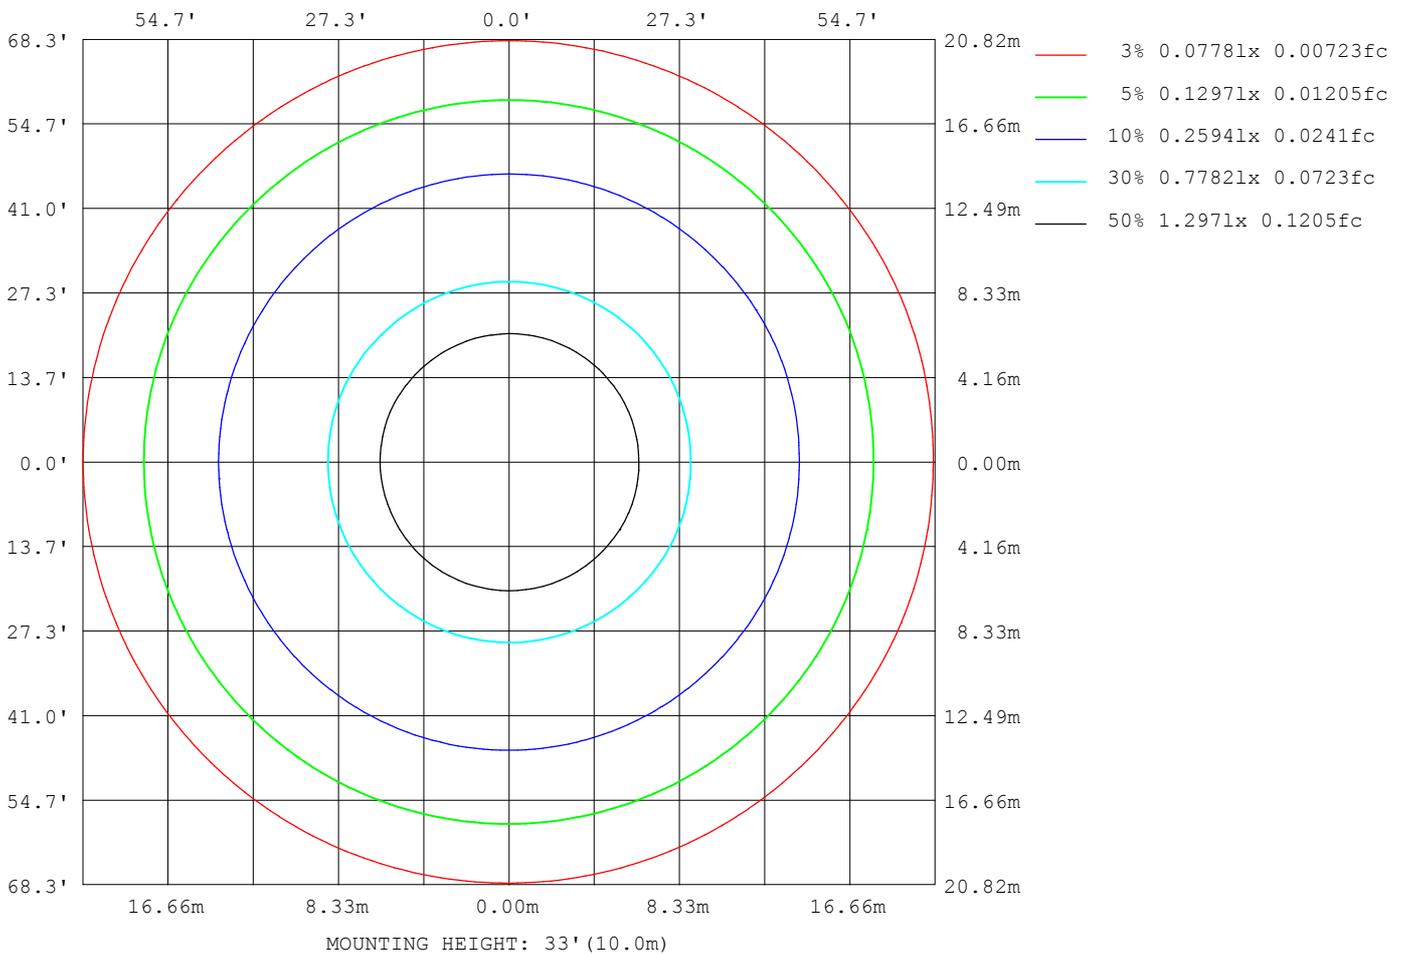

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

Planar Illuminance Curve

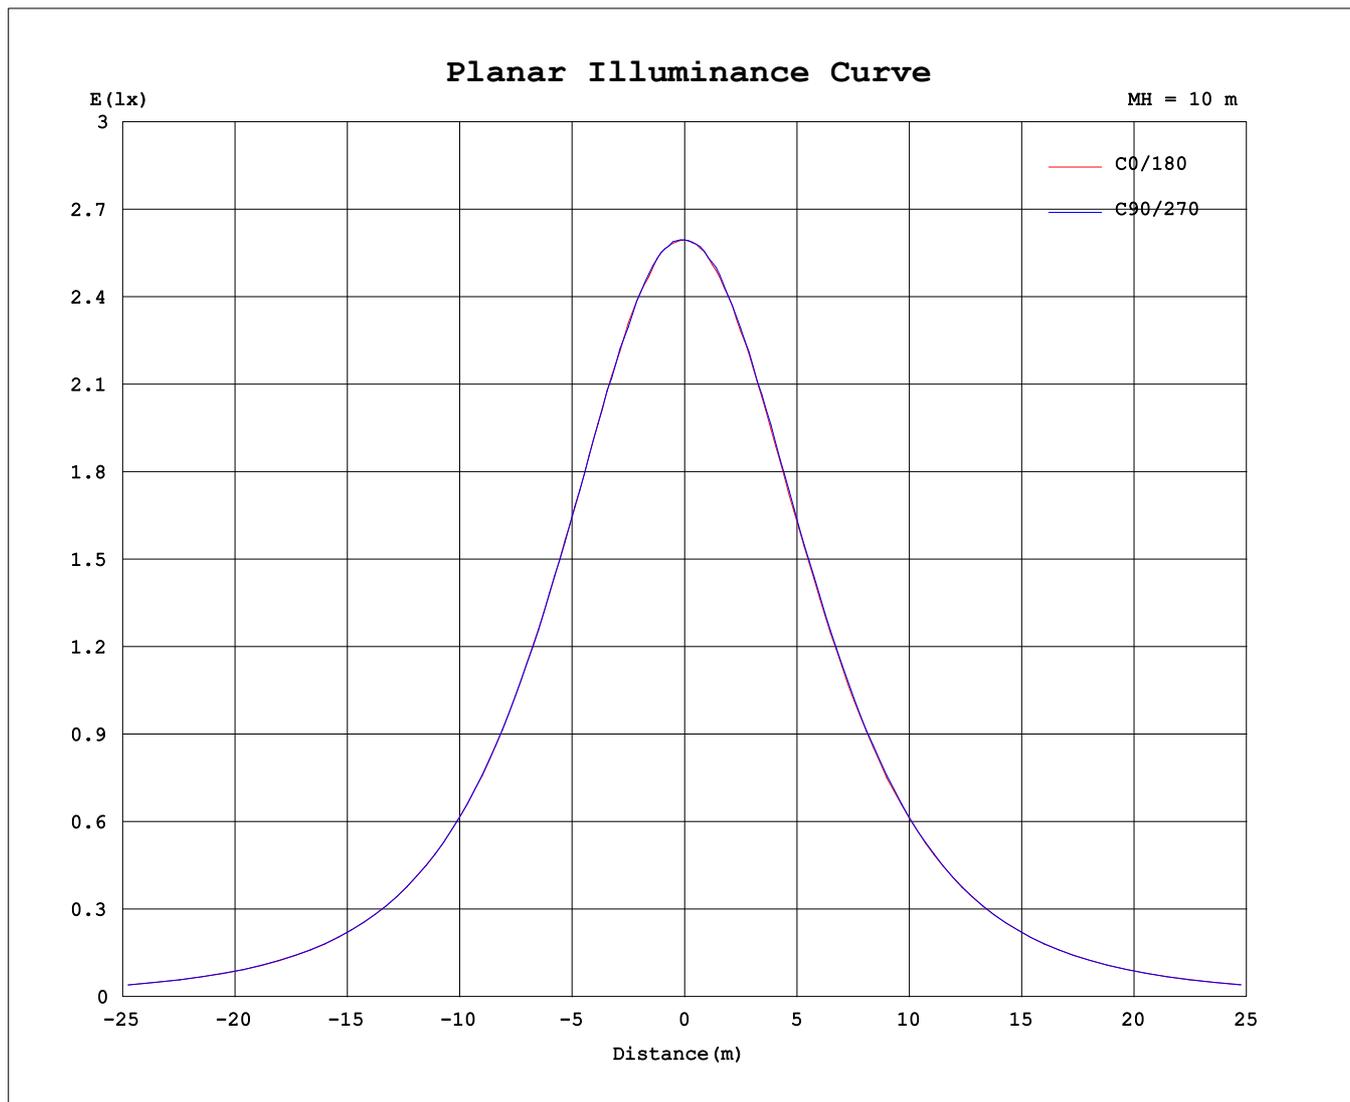

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Ethan
Test Date: 2022-05-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 26.000m [K=1.3807]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.1081A P:12.80W PF:0.9848 Freq:60.01Hz Lamp Flux:742.082x1 lm		
NAME: PD605-13S-952C5-120D-WH 2700K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

γ (DEG) \ C (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	260	260	260	260	260	260	260	260	260	260	260	260	260	260	260	260			
5	260	260	259	259	259	260	258	259	259	258	258	259	259	259	258	258			
10	256	256	257	258	257	256	254	255	255	254	254	255	255	255	255	255			
15	251	250	252	252	251	251	250	249	249	249	249	250	250	249	249	250			
20	244	243	244	244	243	243	242	241	241	241	241	242	242	242	242	243			
25	233	234	233	234	233	233	232	231	231	232	232	232	233	233	233	233			
30	222	222	222	223	222	222	220	219	220	219	219	220	221	222	221	222			
35	208	208	208	208	208	208	206	206	206	205	206	207	207	208	207	208			
40	192	192	192	192	192	192	190	190	191	190	190	191	192	193	191	193			
45	175	174	174	175	174	174	173	172	173	173	173	174	174	175	174	175			
50	156	155	155	156	156	155	154	155	155	155	154	155	155	156	156	156			
55	135	135	134	135	135	135	135	134	135	134	135	135	135	135	135	136			
60	114	113	113	114	114	114	113	113	114	113	113	114	114	114	114	114			
65	91.7	91.4	90.9	91.7	92.0	92.1	92.2	92.3	92.8	92.1	91.8	92.1	92.0	92.1	92.2	93.2			
70	69.7	69.4	69.1	69.3	69.6	70.5	70.9	70.6	71.4	70.9	70.2	70.2	70.3	70.5	70.4	70.8			
75	48.3	47.6	47.3	47.7	48.1	49.1	49.5	49.6	50.3	49.7	49.0	48.7	48.9	49.0	49.1	49.7			
80	28.2	27.9	27.7	27.8	28.3	29.1	29.7	29.8	30.4	29.5	28.7	28.3	28.5	28.7	28.9	29.2			
85	9.93	9.81	9.90	10.0	10.4	10.8	11.3	11.4	11.8	11.3	10.6	10.4	10.1	10.2	10.4	10.5			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	0.09	0.09	0.09	0.09	0.09	0.09			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	0.27	0.09	0.09	0.09	0.09	0.09			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.18	0.18	0.18	0.18	0.27	0.18	0.18			
170	0.18	0.00	0.27	0.00	0.00	0.27	0.00	0.18	0.18	0.27	0.18	0.27	0.36	0.27	0.36	0.18			
175	0.18	0.36	0.18	0.27	0.27	0.18	0.27	0.27	0.18	0.27	0.27	0.27	0.36	0.27	0.36	0.36			
180	0.36	0.36	0.18	0.36	0.09	0.18	0.18	0.00	0.18	0.36	0.27	0.18	0.36	0.36	0.27	0.18			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks: