
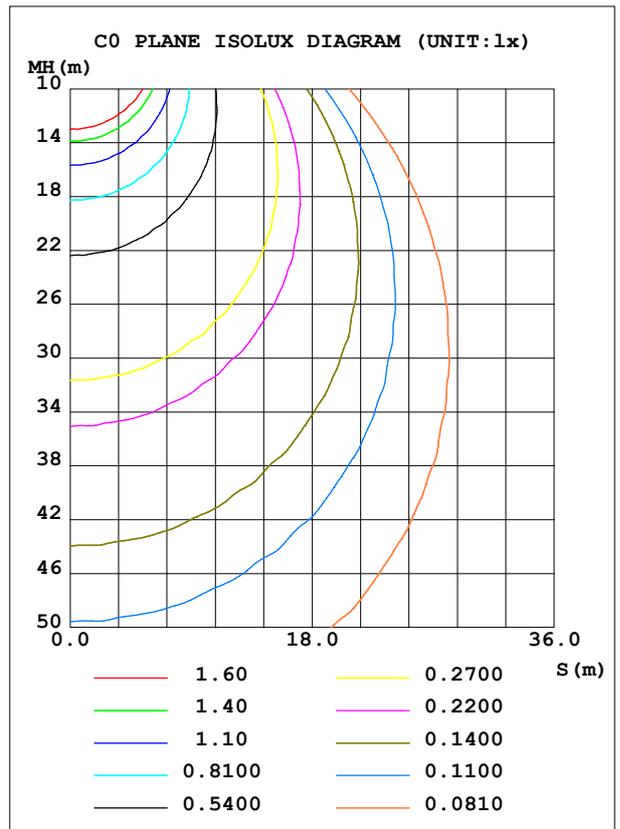


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 60.98 lm/W
MODEL		Imax (cd)	270.3	S/MH (C0/180)	1.25	
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)	1.26	
RATED VOLTAGE (V)	100-277	TOTAL FLUX (lm)	771.56	η UP, DN (C0-180)	0.0, 50.0	
NOMINAL FLUX (lm)	771.564	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

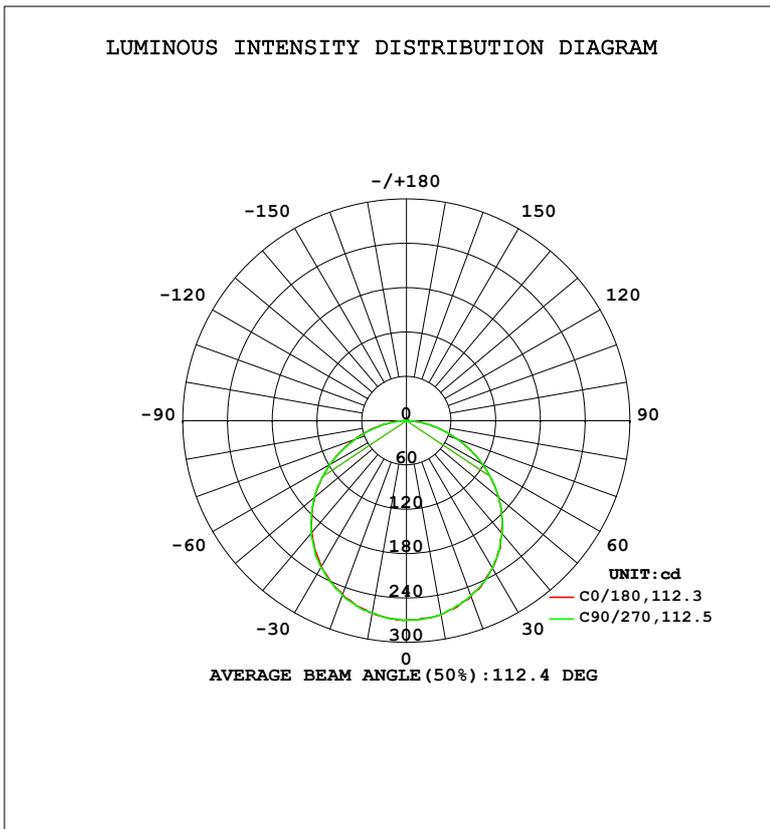

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2 °C
 Operators: Ethan
 Test Date: 2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	266.7	266.1	266.8	264.6	264.2	264.8	264.4	265.8	0- 10	25.56	25.56	3.31,3.31
20	253.2	253.6	252.3	251.8	250.5	250.5	251.6	252.3	10- 20	73.34	98.90	12.8,12.8
30	230.9	231.1	230.6	228.7	228.0	228.4	229.4	230.7	20- 30	111.5	210.4	27.3,27.3
40	199.7	200.7	199.8	198.3	198.1	197.9	199.4	200.3	30- 40	134.7	345.1	44.7,44.7
50	161.8	161.0	160.8	161.7	160.9	161.0	161.0	162.0	40- 50	139.5	484.5	62.8,62.8
60	117.4	117.7	117.9	118.2	118.8	117.6	118.2	118.6	50- 60	125.3	609.9	79,79
70	72.64	71.63	72.25	73.94	73.89	73.14	72.58	73.28	60- 70	94.61	704.5	91.3,91.3
80	29.45	28.81	29.50	31.07	31.78	30.08	29.55	30.28	70- 80	53.94	758.4	98.3,98.3
90	0	0	0	0	0	0	0	0	80- 90	13.06	771.5	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0000	771.5	100,100
110	0	0	0	0	0	0	0	0	100-110	0	771.5	100,100
120	0	0	0	0	0.0881	0	0	0	110-120	0.0003	771.5	100,100
130	0	0	0	0	0	0	0	0	120-130	0.0008	771.5	100,100
140	0	0	0	0	0.0046	0.0894	0	0	130-140	0.0007	771.5	100,100
150	0	0	0	0	0.0897	0	0.0899	0	140-150	0.0098	771.5	100,100
160	0	0	0	0	0.1795	0.1800	0.0899	0.1799	150-160	0.0201	771.5	100,100
170	0.1795	0.0059	0.2697	0.0009	0.1795	0.2699	0.2697	0.2699	160-170	0.0312	771.5	100,100
180	0.5339	0.1800	0.3596	0.2699	0.2692	0.2699	0.3596	0.4498	170-180	0.0258	771.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 415.41 lm

%lum = 53.8%

%lamp = 53.8%

Conical surface Flux(120deg): 609.86 lm

%lum = 79.0%


%lamp = 79.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

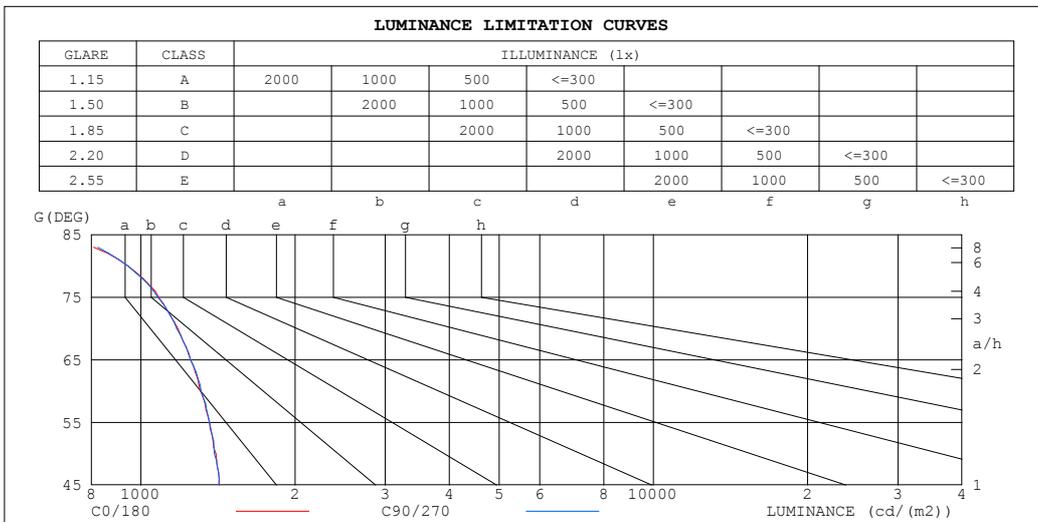

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	654	700
80	944	944
75	1083	1080
70	1182	1174
65	1250	1251
60	1308	1311
55	1360	1361
50	1401	1390
45	1420	1423


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization (CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.90	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.88	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

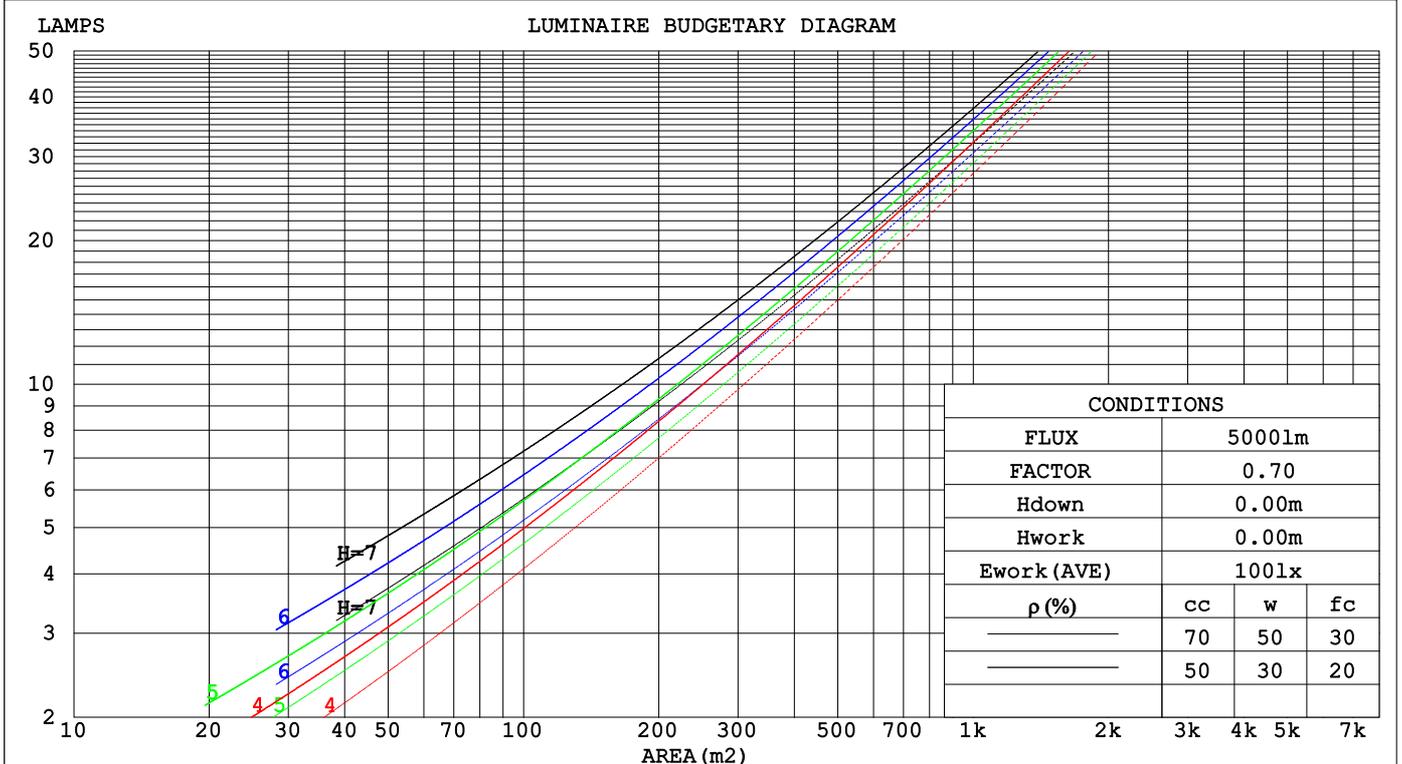

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

WEC AND CCEC

Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.055	.301	.171	.054	.287	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.291	.159	.049	.284	.157	.048	.273	.152	.047	.262	.147	.046	.252	.142	.045	
3.0	.269	.143	.043	.264	.141	.043	.253	.137	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.213	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.025	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.074	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.117	.065	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.9	15.5	14.2	15.7	15.9	13.9	15.5	14.2	15.7	15.9
3H	15.4	16.8	15.7	17.0	17.3	15.4	16.8	15.7	17.0	17.3
4H	16.0	17.3	16.3	17.6	17.8	16.0	17.3	16.3	17.6	17.8
6H	16.4	17.6	16.7	17.9	18.2	16.4	17.6	16.7	17.9	18.2
8H	16.5	17.7	16.8	18.0	18.3	16.5	17.7	16.8	18.0	18.3
12H	16.5	17.7	16.9	18.0	18.3	16.5	17.7	16.9	18.0	18.3
4H 2H	14.5	15.9	14.8	16.1	16.4	14.5	15.9	14.8	16.1	16.4
3H	16.2	17.3	16.5	17.6	17.9	16.2	17.3	16.5	17.6	17.9
4H	16.9	17.9	17.2	18.3	18.6	16.9	17.9	17.2	18.3	18.6
6H	17.4	18.3	17.8	18.7	19.1	17.4	18.3	17.8	18.7	19.0
8H	17.6	18.4	18.0	18.8	19.2	17.5	18.4	17.9	18.8	19.2
12H	17.6	18.4	18.1	18.8	19.2	17.6	18.4	18.0	18.8	19.2
8H 4H	17.1	18.0	17.5	18.4	18.8	17.1	18.0	17.5	18.4	18.7
6H	17.8	18.5	18.2	18.9	19.3	17.8	18.5	18.2	18.9	19.3
8H	18.0	18.7	18.5	19.1	19.5	18.0	18.6	18.4	19.1	19.5
12H	18.1	18.7	18.6	19.2	19.6	18.1	18.7	18.6	19.1	19.6
12H 4H	17.1	17.9	17.6	18.3	18.7	17.1	17.9	17.5	18.3	18.7
6H	17.8	18.5	18.3	18.9	19.3	17.8	18.5	18.3	18.9	19.3
8H	18.1	18.6	18.6	19.1	19.6	18.1	18.6	18.5	19.1	19.5

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.2	+ 0.2 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3

CIE Pub.117, 771.6 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.9)
Area: 0.18 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	87	77	71	83	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

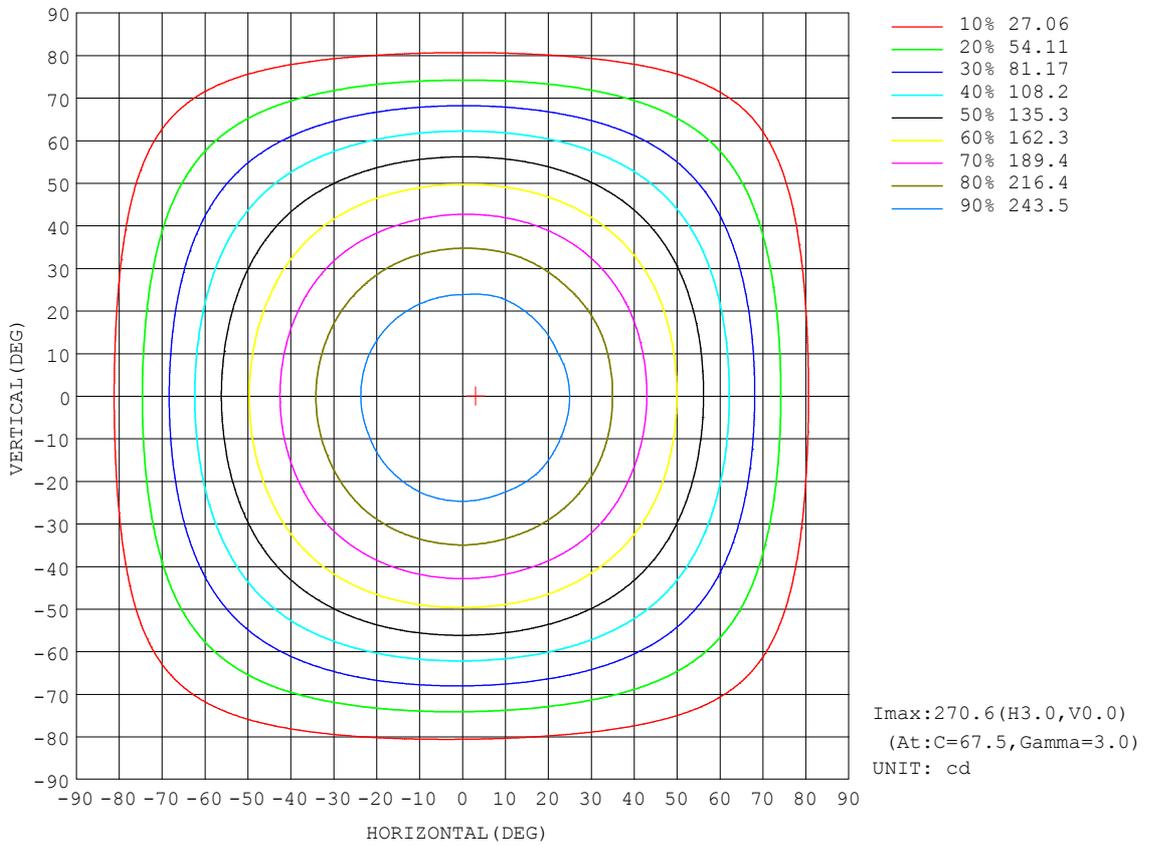


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

AAI Figure

Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Flux out:574.8 lm

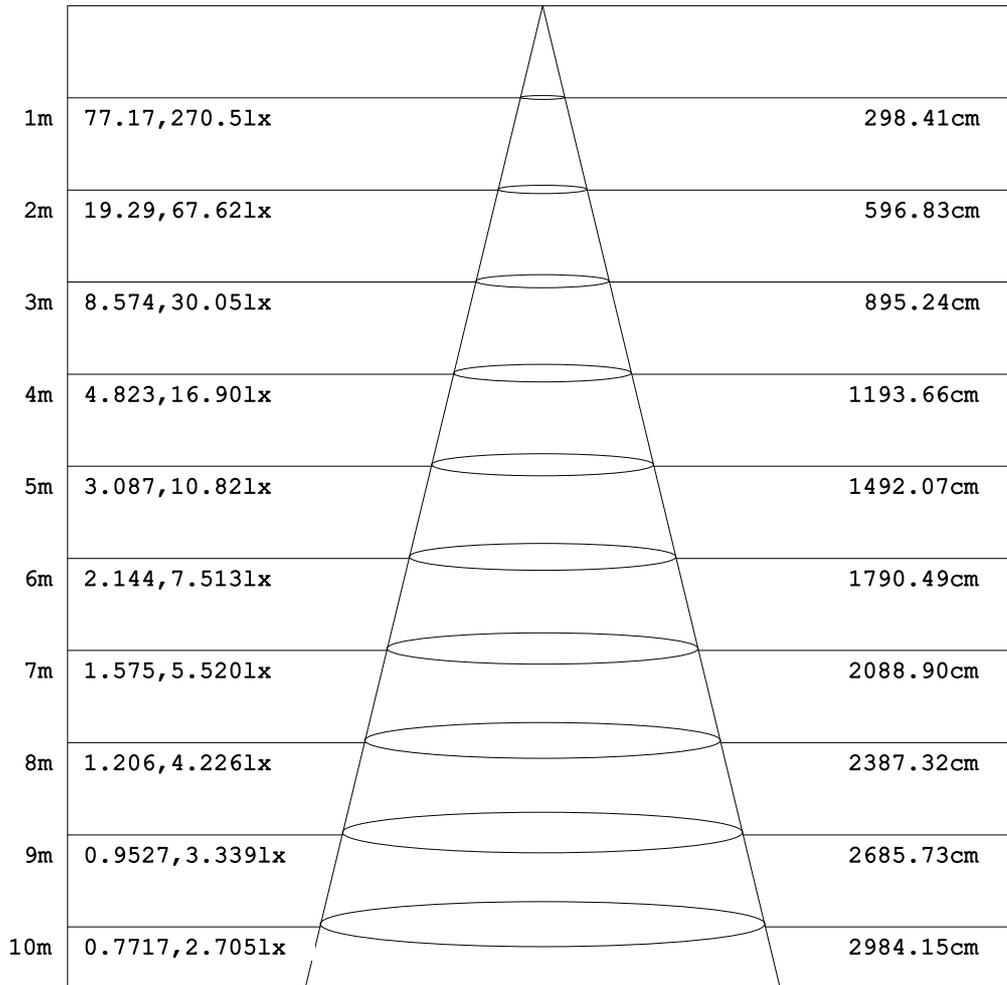


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: $\phi 125\text{mm}$	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

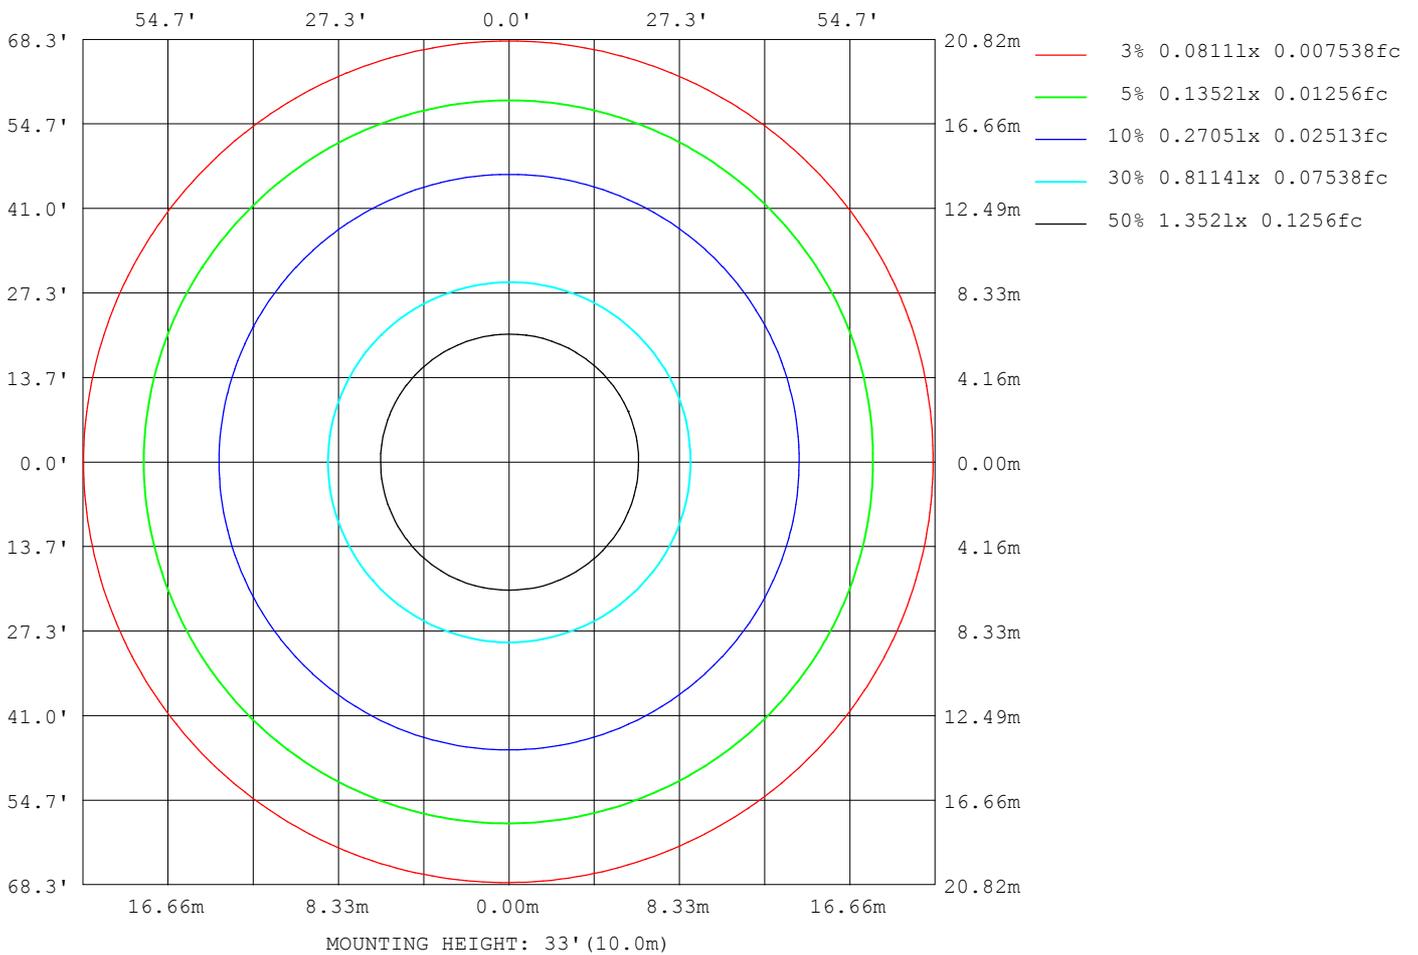

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

Planar Illuminance Curve

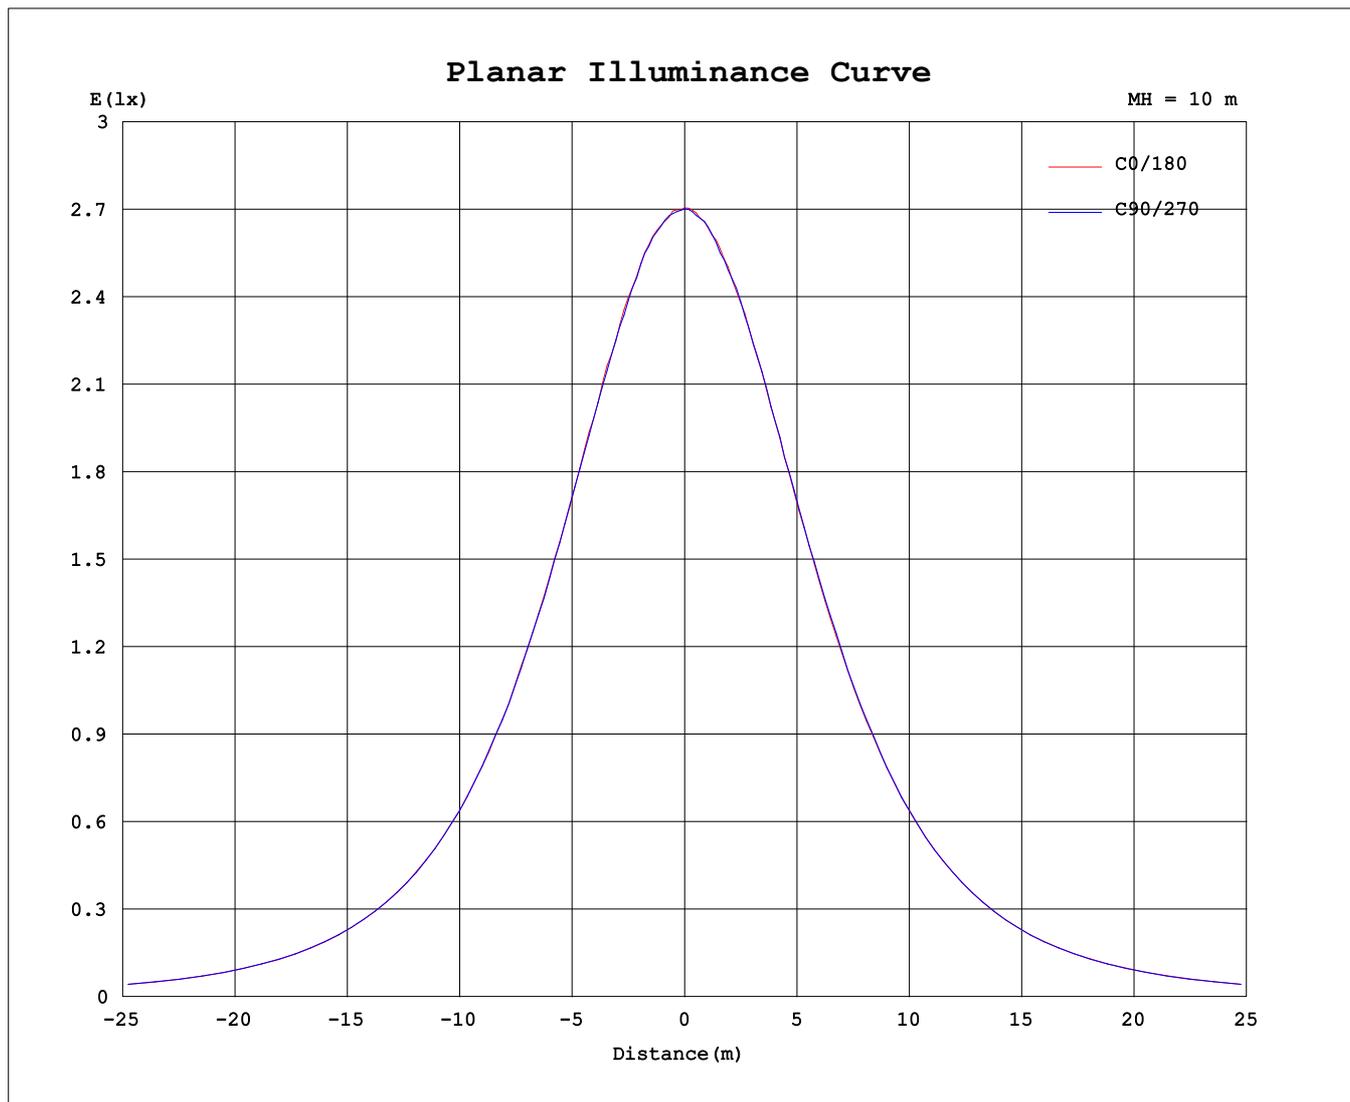

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Ethan
Test Date: 2022-05-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 26.000m [K=1.3807]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1070A P:12.65W PF:0.9845 Freq:60.01Hz Lamp Flux:771.564x1 lm		
NAME: PD605-13S-952C5-120D-WH 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	270	270	270	270	270	270	270	270	270	270	270	270	270	270	270	270			
5	268	269	270	269	269	270	269	269	268	268	268	269	269	269	268	269			
10	267	266	266	266	267	266	265	265	264	264	265	265	264	266	266	265			
15	261	261	262	261	259	260	260	259	259	258	258	259	259	260	260	260			
20	253	253	254	252	252	253	252	250	251	250	250	252	252	253	252	253			
25	243	243	244	243	243	243	241	241	240	241	240	242	241	243	242	243			
30	231	231	231	231	231	230	229	228	228	228	228	229	229	230	231	231			
35	216	217	216	216	216	216	216	214	214	213	214	215	215	216	216	217			
40	200	199	201	200	200	200	198	198	198	198	198	199	199	199	200	200			
45	180	181	181	181	181	182	181	179	180	179	180	180	181	181	182	182			
50	162	162	161	161	161	162	162	161	161	161	161	161	161	162	162	163			
55	140	140	140	141	140	141	140	140	140	140	140	140	140	140	141	141			
60	117	118	118	118	118	119	118	118	119	118	118	118	118	119	119	119			
65	94.9	94.8	94.9	94.8	95.1	96.0	96.0	96.0	96.2	95.7	95.6	95.8	95.4	95.5	96.1	96.7			
70	72.6	72.1	71.6	71.8	72.3	73.5	73.9	73.7	73.9	73.3	73.1	73.0	72.6	72.9	73.3	73.8			
75	50.3	50.0	49.7	49.9	50.3	51.4	52.1	52.3	52.4	51.6	51.1	50.6	50.4	50.9	51.3	51.5			
80	29.4	29.2	28.8	28.9	29.5	30.4	31.1	31.4	31.8	30.7	30.1	29.5	29.6	29.8	30.3	30.3			
85	10.2	10.3	10.3	10.5	11.0	11.5	11.9	12.1	12.3	11.6	11.1	10.7	10.5	10.7	10.8	10.8			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	0.00	0.09	0.09	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	0.00	0.09	0.09	0.09	0.00	0.09			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	0.09	0.09	0.09	0.09	0.00	0.09			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.18	0.18	0.09	0.09	0.09	0.18	0.09			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.27			
170	0.18	0.27	0.01	0.00	0.27	0.27	0.00	0.18	0.18	0.36	0.27	0.27	0.27	0.36	0.27	0.27			
175	0.27	0.27	0.18	0.27	0.36	0.36	0.36	0.36	0.18	0.27	0.36	0.27	0.45	0.36	0.27	0.27			
180	0.53	0.18	0.18	0.45	0.36	0.36	0.27	0.00	0.27	0.36	0.27	0.18	0.36	0.36	0.45	0.27			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks: