
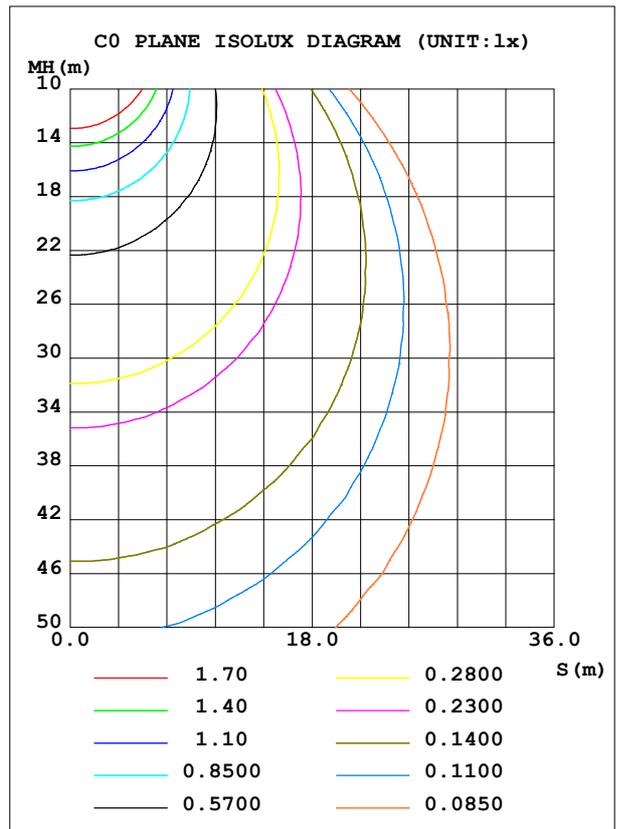


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 65.39 lm/W
MODEL		Imax (cd)	285.6	S/MH (C0/180)	1.26	
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)	1.26	
RATED VOLTAGE (V)	100-277	TOTAL FLUX (lm)	813.76	η UP, DN (C0-180)	0.0, 50.0	
NOMINAL FLUX (lm)	813.76	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

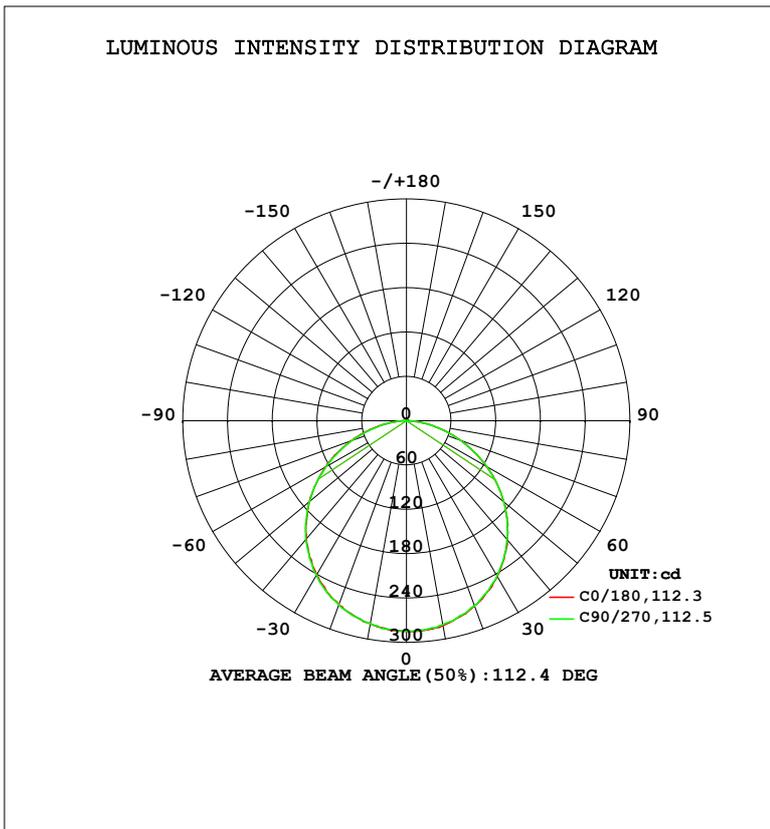

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2 °C
 Operators: Ethan
 Test Date: 2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	281.8	280.5	280.2	279.8	279.1	279.1	278.8	280.1	0- 10	26.95	26.95	3.31,3.31
20	266.7	266.9	266.6	264.2	265.3	264.3	265.3	266.0	10- 20	77.34	104.3	12.8,12.8
30	243.7	242.6	242.8	241.7	241.0	240.9	241.5	242.8	20- 30	117.6	221.9	27.3,27.3
40	210.4	210.5	210.1	209.5	209.1	209.0	210.5	210.6	30- 40	142.0	363.8	44.7,44.7
50	170.3	170.3	170.5	169.6	169.8	169.5	170.2	170.2	40- 50	147.1	510.9	62.8,62.8
60	124.5	123.7	124.8	124.9	125.6	124.4	124.8	125.8	50- 60	132.2	643.1	79,79
70	76.79	76.12	76.46	78.07	78.09	76.96	76.87	77.42	60- 70	99.82	742.9	91.3,91.3
80	31.14	30.35	31.11	32.80	33.53	31.59	31.24	31.72	70- 80	56.93	799.9	98.3,98.3
90	0	0	0	0	0	0	0	0	80- 90	13.79	813.7	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0000	813.7	100,100
110	0	0	0	0	0	0	0	0	100-110	0	813.7	100,100
120	0	0	0	0	0	0	0	0	110-120	0	813.7	100,100
130	0	0	0	0	0	0	0	0	120-130	0.0012	813.7	100,100
140	0	0	0	0	0	0	0	0	130-140	0.0002	813.7	100,100
150	0	0	0	0	0.0900	0.0899	0.0900	0.1793	140-150	0.0148	813.7	100,100
160	0	0	0	0	0.1806	0.1801	0.1800	0.2692	150-160	0.0258	813.7	100,100
170	0.2696	0.0026	0.1800	0.0907	0.1801	0.1798	0.4499	0.3592	160-170	0.0371	813.7	100,100
180	0.2701	0.1798	0.3599	0.1791	0.1801	0.4496	0.4499	0.3597	170-180	0.0271	813.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 438.01 lm

%lum = 53.8%

%lamp = 53.8%

Conical surface Flux(120deg): 643.11 lm

%lum = 79.0%


%lamp = 79.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

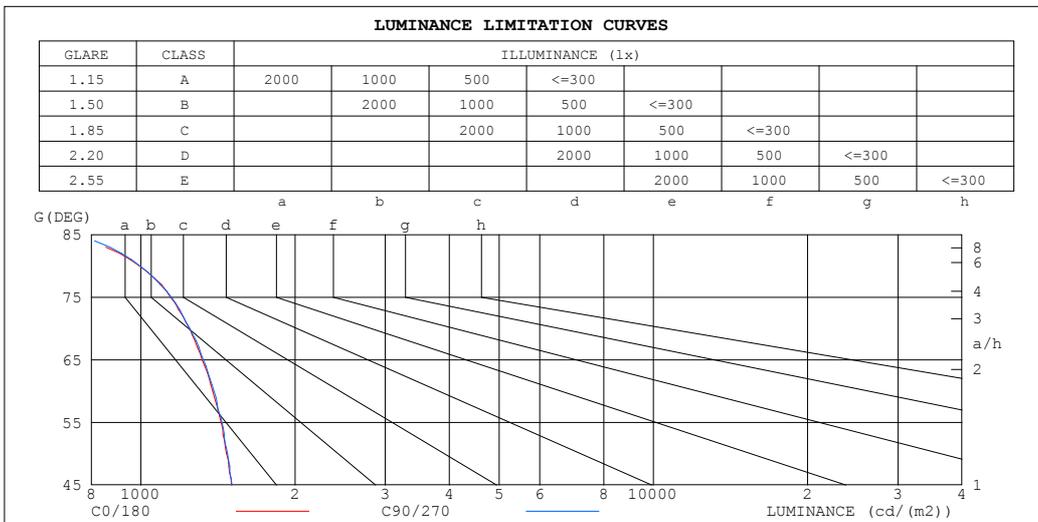

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	701	739
80	995	997
75	1142	1148
70	1246	1244
65	1317	1325
60	1382	1389
55	1435	1440
50	1470	1476
45	1502	1507


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization (CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.90	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.88	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

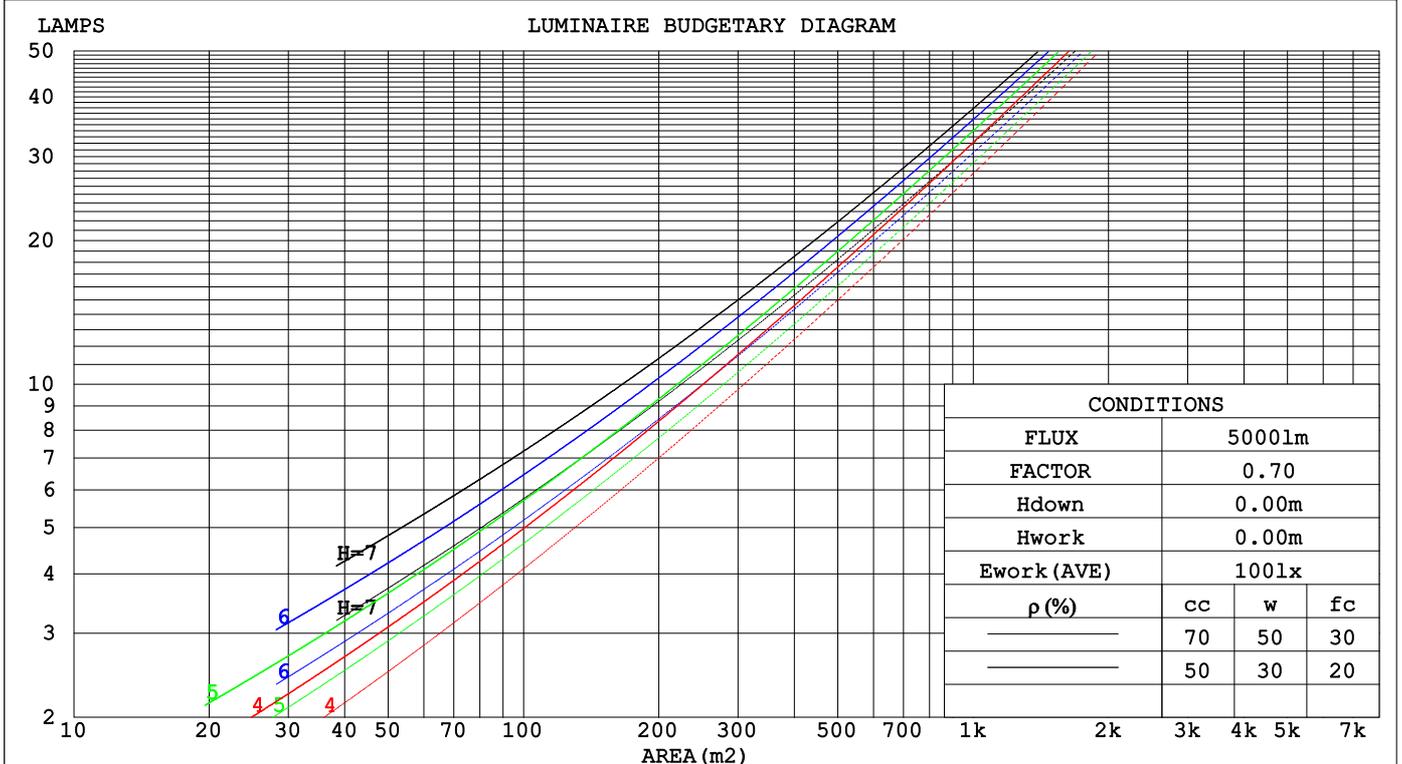

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

WEC AND CCEC

Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.055	.301	.172	.054	.287	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.291	.159	.049	.284	.157	.048	.273	.152	.047	.262	.147	.046	.252	.143	.045	
3.0	.269	.143	.043	.264	.141	.043	.253	.137	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.213	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.025	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.074	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.117	.065	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.1	15.6	14.4	15.8	16.0	14.1	15.7	14.4	15.9	16.1
3H	15.6	17.0	15.9	17.2	17.5	15.6	17.0	15.9	17.2	17.5
4H	16.2	17.5	16.5	17.8	18.0	16.2	17.5	16.5	17.8	18.0
6H	16.6	17.8	16.9	18.1	18.4	16.6	17.8	16.9	18.1	18.4
8H	16.7	17.9	17.0	18.2	18.5	16.7	17.9	17.0	18.2	18.5
12H	16.7	17.9	17.1	18.2	18.5	16.7	17.9	17.1	18.2	18.5
4H 2H	14.7	16.0	15.0	16.3	16.6	14.7	16.1	15.0	16.3	16.6
3H	16.4	17.5	16.7	17.8	18.1	16.4	17.5	16.7	17.8	18.1
4H	17.1	18.1	17.4	18.4	18.8	17.1	18.1	17.4	18.5	18.8
6H	17.6	18.5	18.0	18.9	19.2	17.6	18.5	18.0	18.9	19.3
8H	17.7	18.6	18.1	19.0	19.4	17.7	18.6	18.2	19.0	19.4
12H	17.8	18.6	18.2	19.0	19.4	17.8	18.6	18.3	19.0	19.4
8H 4H	17.3	18.2	17.7	18.6	18.9	17.3	18.2	17.7	18.6	19.0
6H	18.0	18.7	18.4	19.1	19.5	18.0	18.7	18.4	19.1	19.5
8H	18.2	18.8	18.7	19.3	19.7	18.2	18.8	18.7	19.3	19.7
12H	18.3	18.9	18.8	19.3	19.8	18.3	18.9	18.8	19.4	19.8
12H 4H	17.3	18.1	17.7	18.5	18.9	17.3	18.1	17.7	18.5	18.9
6H	18.0	18.7	18.5	19.1	19.5	18.0	18.7	18.5	19.1	19.5
8H	18.3	18.8	18.7	19.3	19.8	18.3	18.8	18.8	19.3	19.8

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.2	+ 0.2 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3

CIE Pub.117, 813.8 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.7)
Area: 0.18 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	87	77	71	83	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

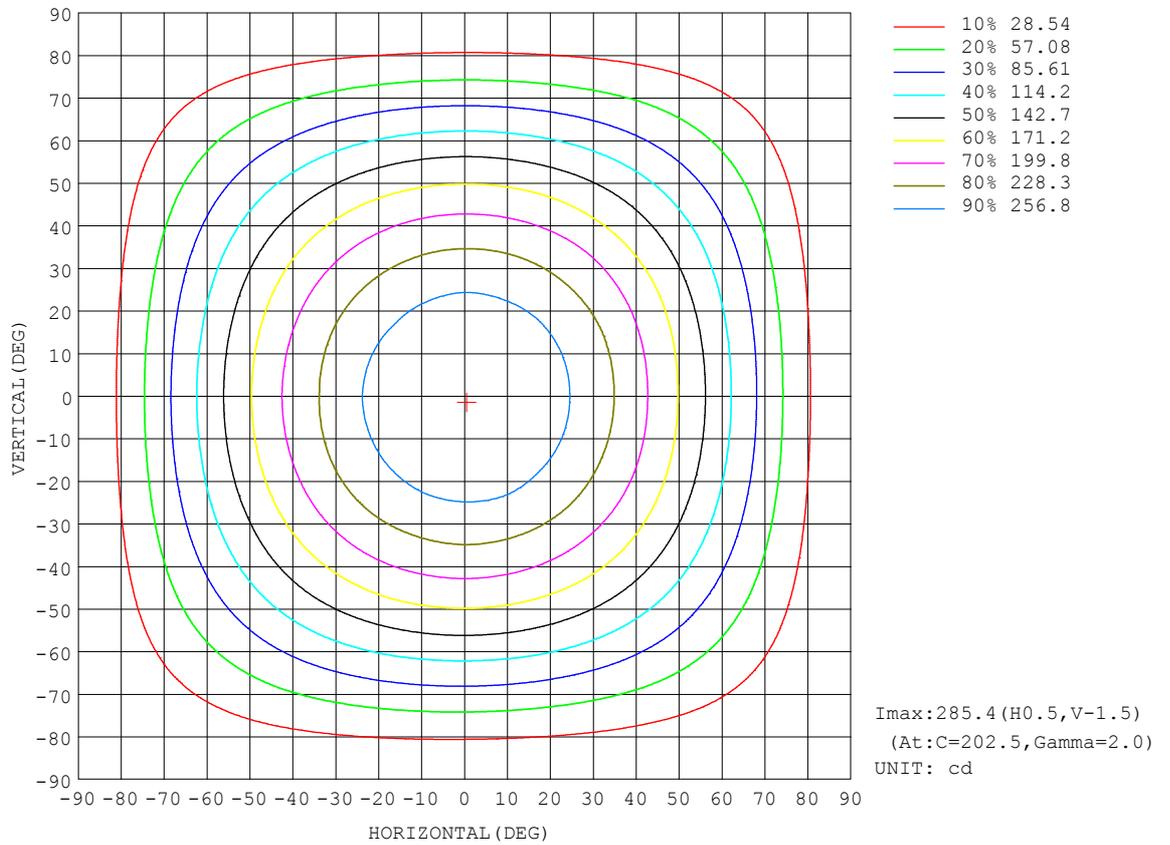


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

AAI Figure

Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Flux out:606.2 lm

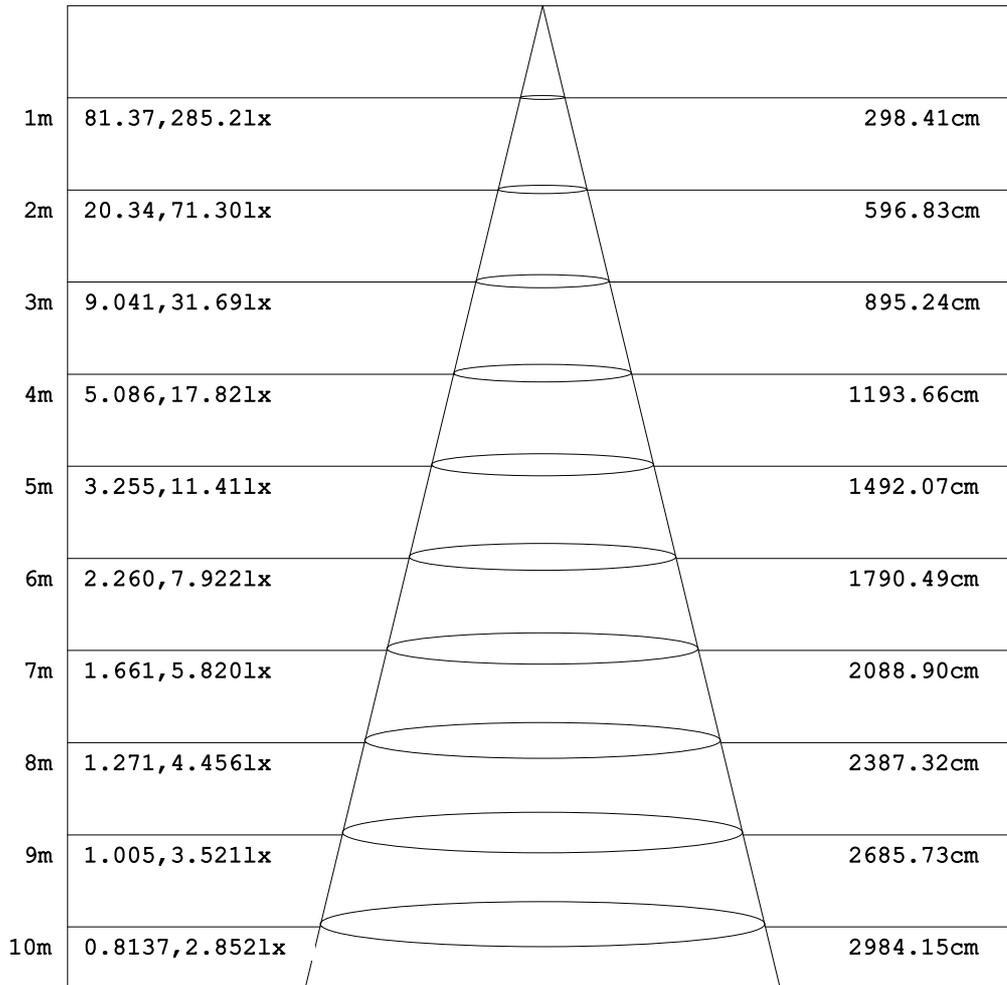


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

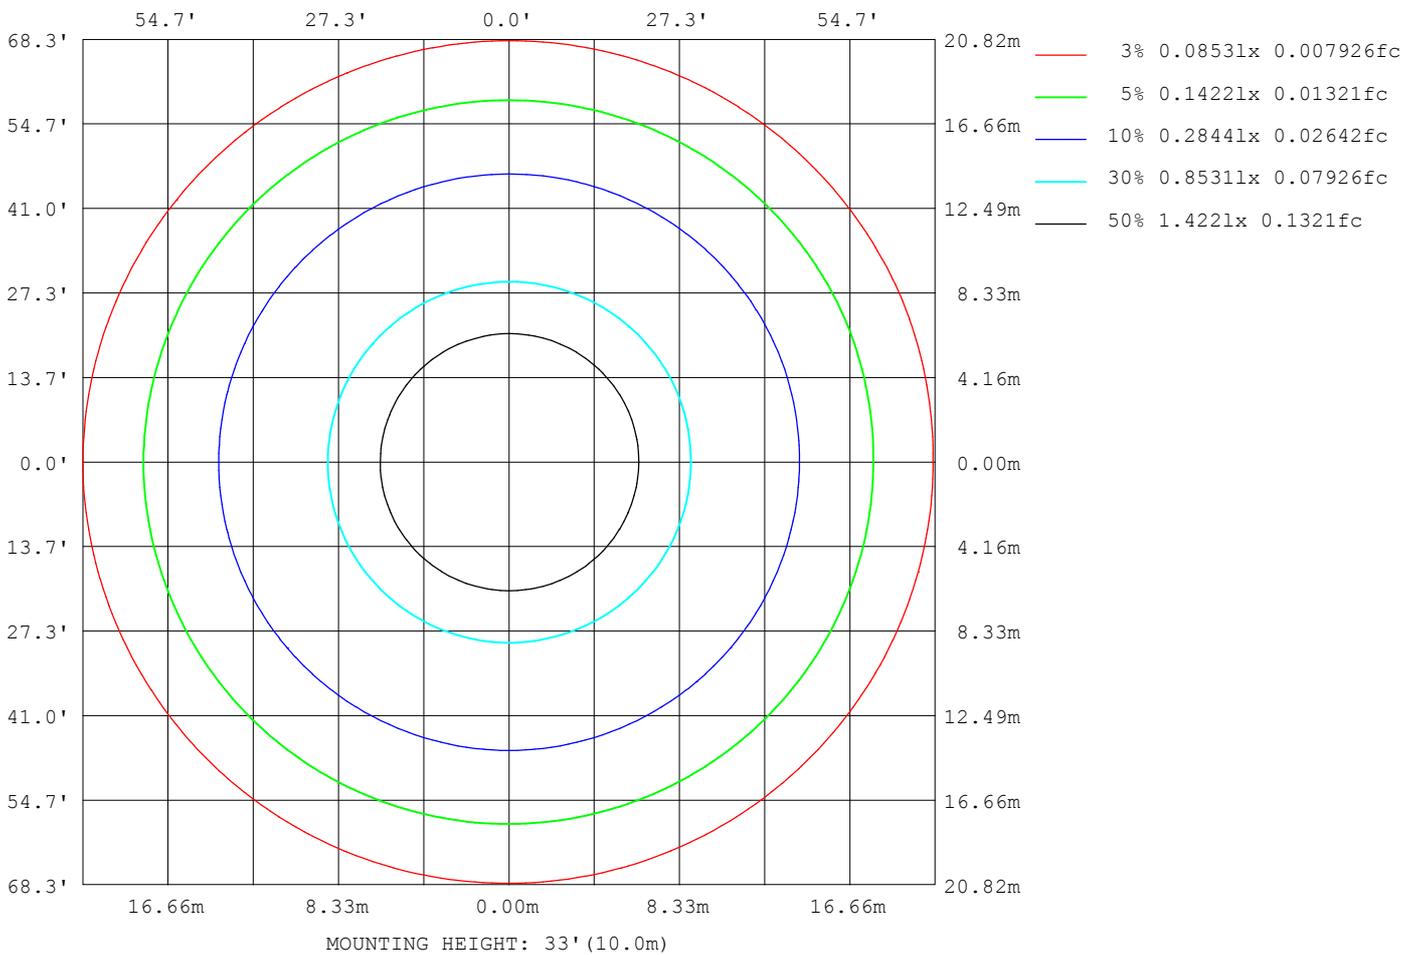

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

Planar Illuminance Curve

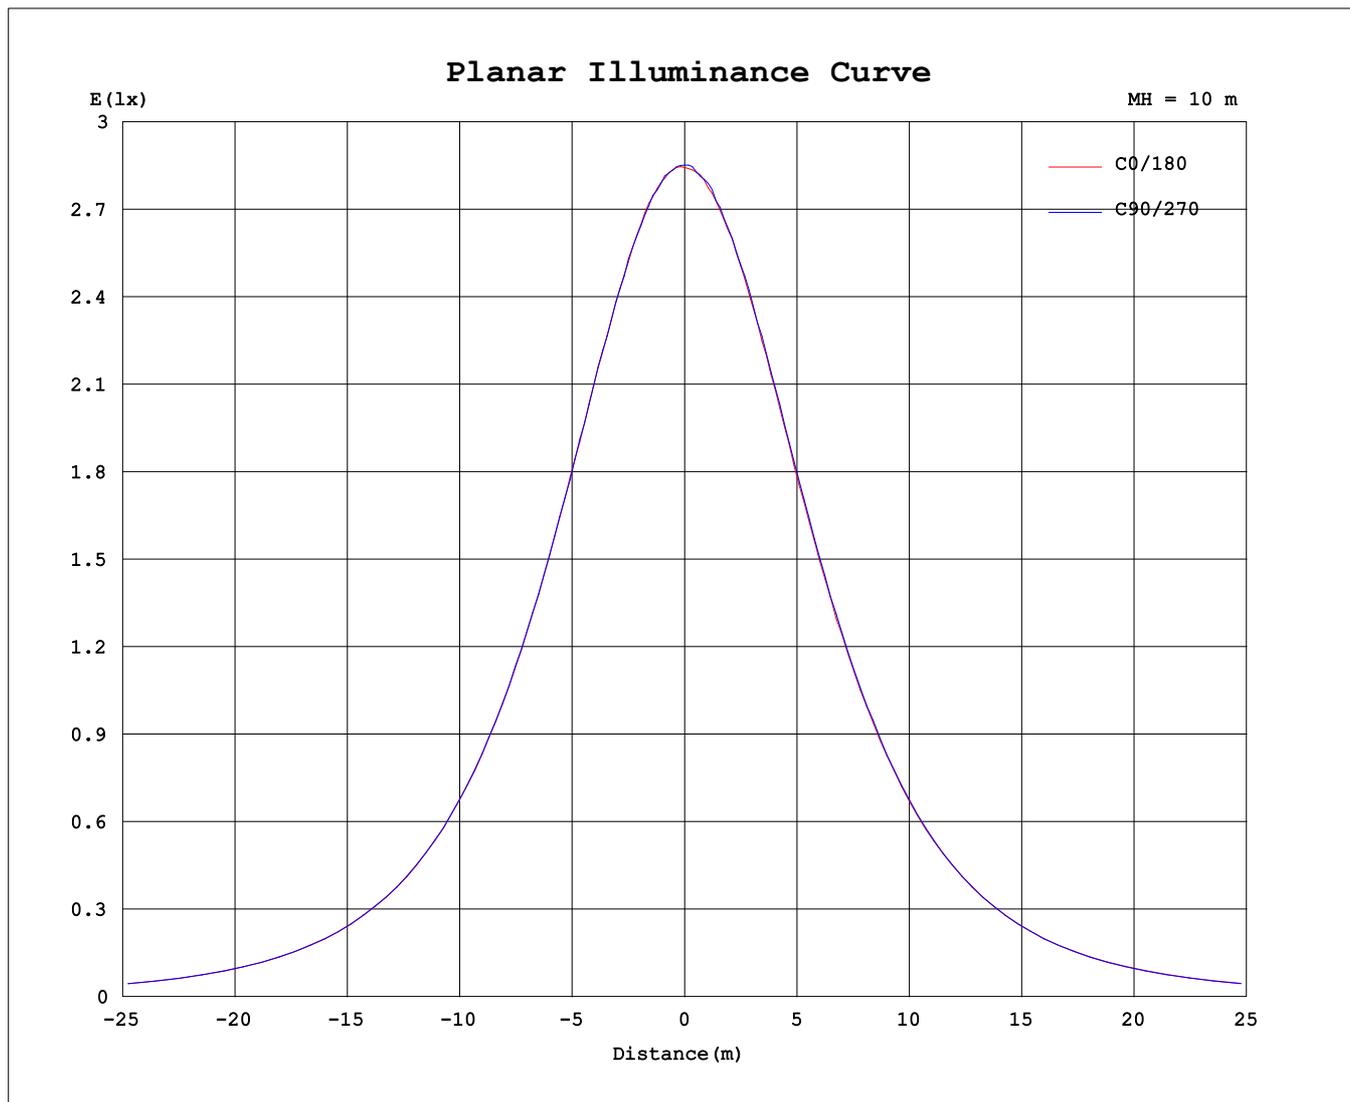

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Ethan
Test Date: 2022-05-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 26.000m [K=1.3807]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1053A P:12.45W PF:0.9842 Freq:60.01Hz Lamp Flux:813.76x1 lm		
NAME: PD605-13S-952C5-120D-WH 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	285	285	285	285	285	285	285	285	285	285	285	285	285	285	285	285			
5	284	284	284	283	284	283	283	284	284	283	283	283	283	283	284	285			
10	282	281	280	280	280	280	280	280	279	279	279	278	279	280	280	280			
15	275	275	275	274	274	275	273	274	273	273	273	273	274	274	275	275			
20	267	267	267	267	267	266	264	265	265	265	264	265	265	265	266	267			
25	256	256	256	257	256	256	255	254	255	252	254	255	255	255	256	256			
30	244	243	243	243	243	242	242	242	241	241	241	241	241	242	243	243			
35	228	228	228	227	228	226	226	226	226	226	225	226	227	227	228	229			
40	210	211	211	210	210	210	209	209	209	209	209	209	210	210	211	211			
45	191	191	191	192	192	191	190	190	190	190	190	190	191	190	192	192			
50	170	170	170	170	171	170	170	169	170	169	169	170	170	170	170	171			
55	148	148	148	148	148	148	148	148	148	148	148	147	148	148	149	149			
60	125	124	124	124	125	125	125	125	126	125	124	124	125	125	126	126			
65	100	100	99.8	100	101	101	101	101	102	101	101	100	101	101	101	102			
70	76.8	76.1	76.1	75.9	76.5	77.2	78.1	77.7	78.1	77.7	77.0	76.3	76.9	76.9	77.4	77.8			
75	53.3	53.0	52.5	52.7	53.4	54.2	55.0	55.2	55.2	54.4	53.7	53.2	53.4	53.5	54.3	54.4			
80	31.1	30.8	30.3	30.5	31.1	32.2	32.8	33.1	33.5	32.5	31.6	30.9	31.2	31.5	31.7	32.2			
85	11.0	11.0	10.9	11.2	11.6	12.1	12.5	12.8	12.9	12.3	11.6	11.1	11.1	11.2	11.4	11.5			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.18	0.00	0.00	0.09	0.09	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	0.09	0.09	0.09	0.09	0.18	0.09			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	0.18	0.09	0.09	0.09	0.09	0.09			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.18	0.18	0.18	0.18	0.18	0.27	0.09			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.18	0.27	0.18	0.18	0.18	0.36	0.18	0.18			
170	0.27	0.00	0.00	0.27	0.18	0.27	0.09	0.27	0.18	0.27	0.18	0.36	0.45	0.36	0.36	0.36			
175	0.36	0.27	0.18	0.27	0.27	0.36	0.18	0.27	0.18	0.27	0.36	0.18	0.36	0.45	0.45	0.27			
180	0.27	0.27	0.18	0.45	0.36	0.45	0.18	0.45	0.18	0.27	0.45	0.18	0.45	0.36	0.36	0.36			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks: