
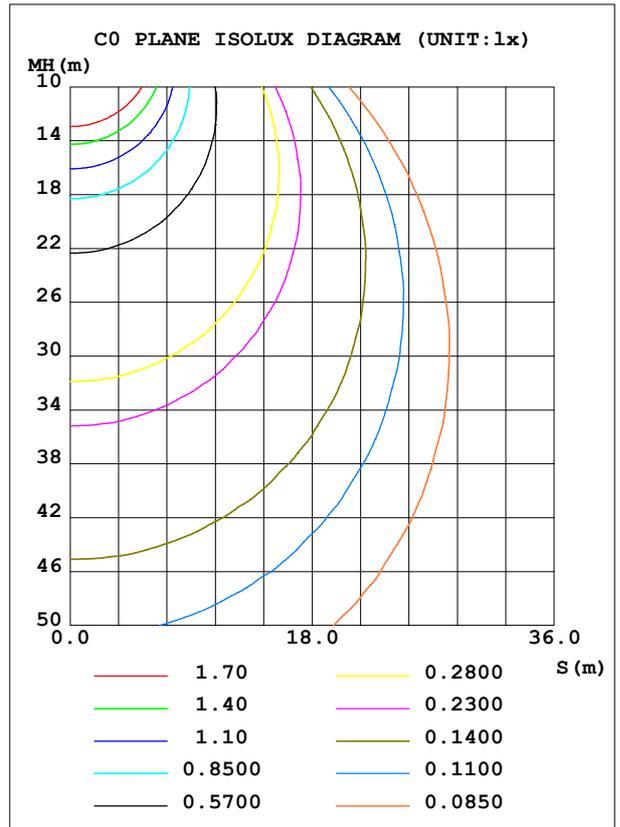


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.14lx1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 64.12 lm/W
MODEL		I _{max} (cd)	285.6	S/MH (C0/180)	1.26	
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)	1.26	
RATED VOLTAGE (V)	100-277	TOTAL FLUX (lm)	813.14	η UP, DN (C0-180)	0.0, 49.9	
NOMINAL FLUX (lm)	813.141	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

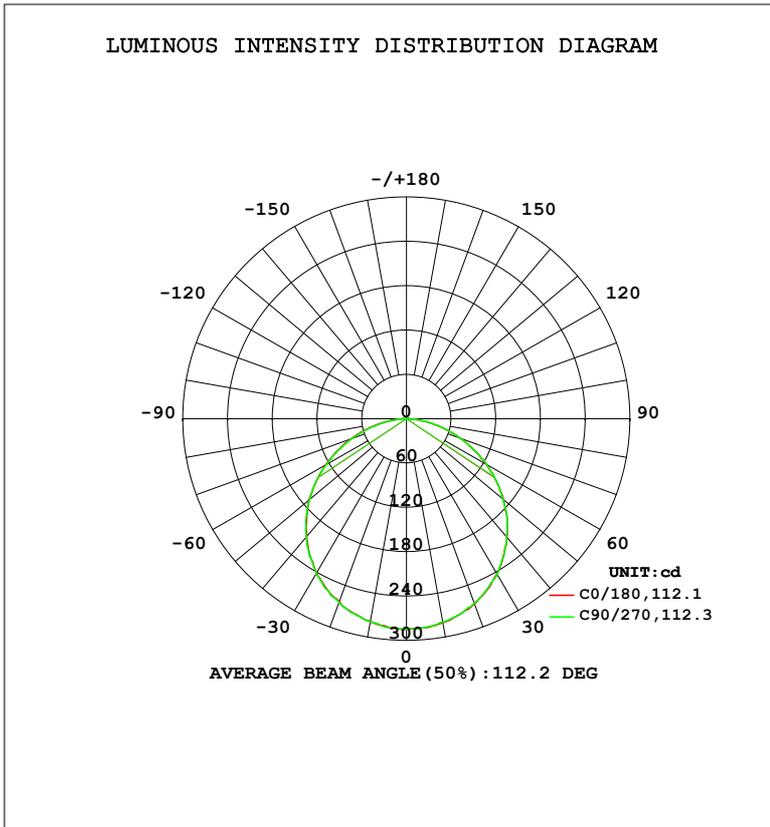

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2 °C
 Operators: Ethan
 Test Date: 2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	280.3	280.2	279.2	280.1	278.4	278.8	279.0	280.2	0- 10	26.94	26.94	3.31,3.31
20	266.8	266.2	265.8	265.3	263.5	264.0	265.0	266.8	10- 20	77.31	104.3	12.8,12.8
30	242.8	243.0	243.5	242.1	241.0	240.3	242.2	243.2	20- 30	117.5	221.8	27.3,27.3
40	209.8	209.9	209.4	209.4	208.5	207.9	209.4	210.5	30- 40	141.9	363.7	44.7,44.7
50	169.8	170.0	169.3	169.6	170.5	169.1	169.5	171.3	40- 50	147.0	510.6	62.8,62.8
60	123.9	123.4	124.3	124.6	125.4	124.5	124.0	125.5	50- 60	132.1	642.7	79,79
70	75.94	75.49	76.20	77.65	77.98	76.77	77.29	77.69	60- 70	99.74	742.4	91.3,91.3
80	30.83	30.03	30.88	32.55	33.59	31.78	31.28	32.06	70- 80	56.88	799.3	98.3,98.3
90	0	0	0	0	0	0	0	0	80- 90	13.78	813.1	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0000	813.1	100,100
110	0	0	0	0	0	0	0	0	100-110	0	813.1	100,100
120	0	0	0	0	0	0	0	0	110-120	0	813.1	100,100
130	0	0	0	0	0.0031	0	0	0	120-130	0.0000	813.1	100,100
140	0	0	0	0	0	0	0	0	130-140	0.0013	813.1	100,100
150	0	0	0	0	0	0	0.1783	0.0900	140-150	0.0018	813.1	100,100
160	0	0	0	0	0.1805	0.1797	0.1804	0.1800	150-160	0.0202	813.1	100,100
170	0	0	0	0.0007	0.2703	0.1797	0.2712	0.3599	160-170	0.0297	813.1	100,100
180	0.1797	0.3593	0.5390	0.4514	0.3594	0.3593	0.4496	0.4499	170-180	0.0224	813.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 437.78 lm

%lum = 53.8%

%lamp = 53.8%

Conical surface Flux(120deg): 642.67 lm

%lum = 79.0%


%lamp = 79.0%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.14lx1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

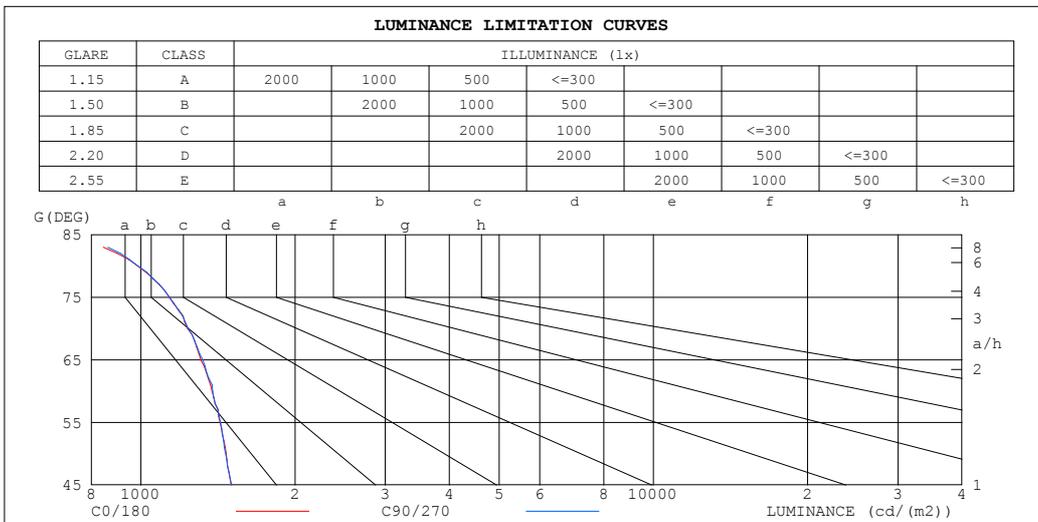

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	690	723
80	986	987
75	1135	1137
70	1234	1237
65	1308	1320
60	1377	1380
55	1427	1430
50	1468	1462
45	1503	1500


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.14lx1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization (CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.88	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

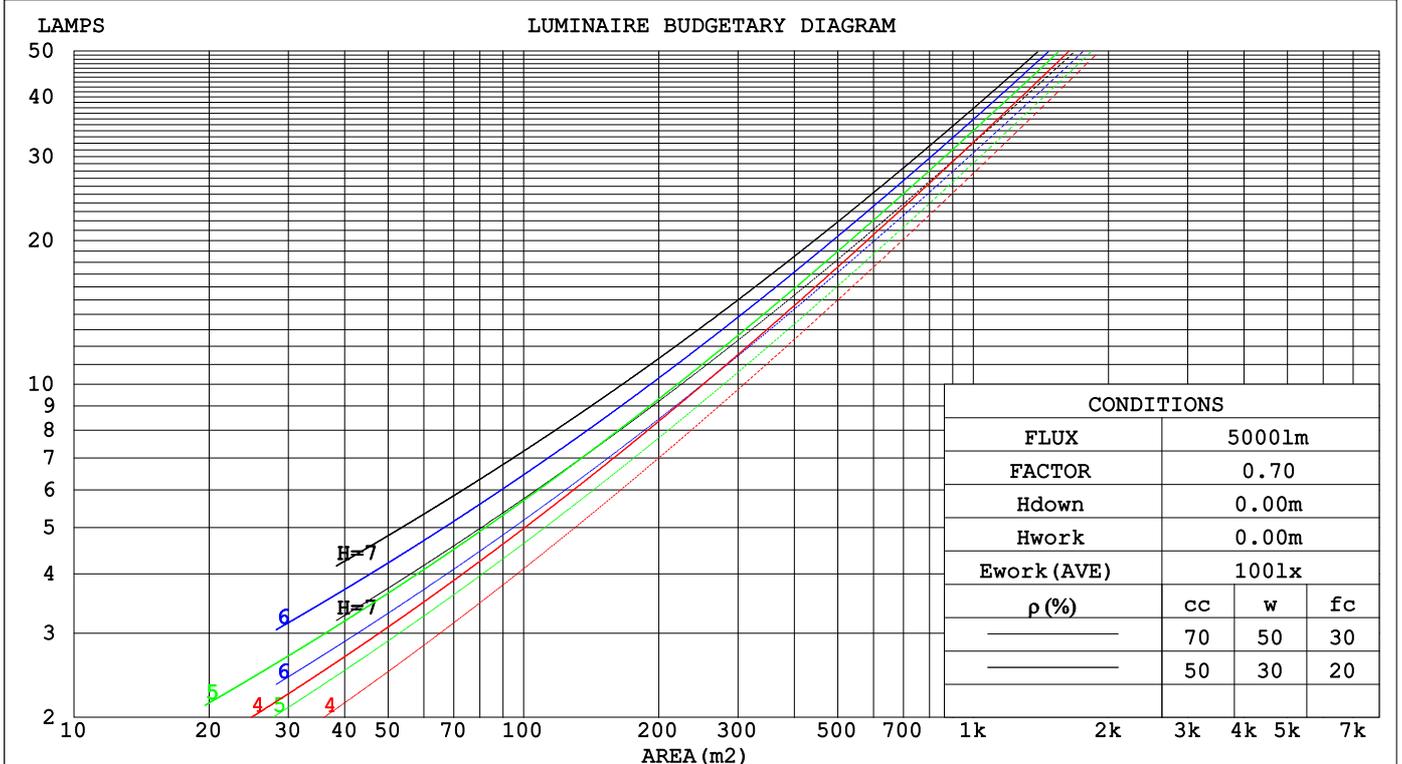

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

WEC AND CCEC

Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.141x1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.055	.301	.171	.054	.287	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.291	.159	.049	.284	.157	.048	.273	.152	.047	.262	.147	.046	.252	.142	.045	
3.0	.269	.143	.043	.264	.141	.043	.253	.137	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.213	.107	.031	.210	.106	.030	.202	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.025	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.074	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.117	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.14lx1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.1	15.6	14.4	15.8	16.0	14.1	15.6	14.4	15.8	16.0
3H	15.6	17.0	15.9	17.2	17.4	15.6	17.0	15.9	17.2	17.5
4H	16.1	17.5	16.5	17.7	18.0	16.1	17.5	16.5	17.7	18.0
6H	16.5	17.8	16.9	18.1	18.4	16.5	17.8	16.9	18.1	18.4
8H	16.6	17.9	17.0	18.1	18.4	16.7	17.9	17.0	18.2	18.4
12H	16.7	17.9	17.0	18.2	18.5	16.7	17.9	17.1	18.2	18.5
4H 2H	14.7	16.0	15.0	16.3	16.5	14.7	16.0	15.0	16.3	16.5
3H	16.3	17.5	16.7	17.8	18.1	16.3	17.5	16.7	17.8	18.1
4H	17.0	18.1	17.4	18.4	18.8	17.0	18.1	17.4	18.4	18.8
6H	17.6	18.5	18.0	18.9	19.2	17.5	18.5	17.9	18.8	19.2
8H	17.7	18.6	18.1	19.0	19.3	17.7	18.6	18.1	19.0	19.3
12H	17.8	18.6	18.2	19.0	19.4	17.8	18.6	18.2	19.0	19.4
8H 4H	17.3	18.2	17.7	18.5	18.9	17.3	18.2	17.7	18.5	18.9
6H	17.9	18.7	18.4	19.1	19.5	17.9	18.7	18.4	19.1	19.5
8H	18.2	18.8	18.6	19.2	19.7	18.2	18.8	18.6	19.2	19.7
12H	18.3	18.9	18.8	19.3	19.8	18.3	18.9	18.8	19.3	19.8
12H 4H	17.3	18.1	17.7	18.5	18.9	17.3	18.1	17.7	18.5	18.9
6H	18.0	18.6	18.4	19.1	19.5	18.0	18.6	18.4	19.1	19.5
8H	18.2	18.8	18.7	19.3	19.7	18.2	18.8	18.7	19.2	19.7

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.2	+ 0.2 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.2	+ 0.2 / - 0.3

CIE Pub.117, 813.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.7)
Area: 0.18 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Ethan
Test Date:2022-05-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity:55.3%
Test Distance:26.000m [K=1.3807]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.14lx1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	87	77	71	83	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.14lx1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

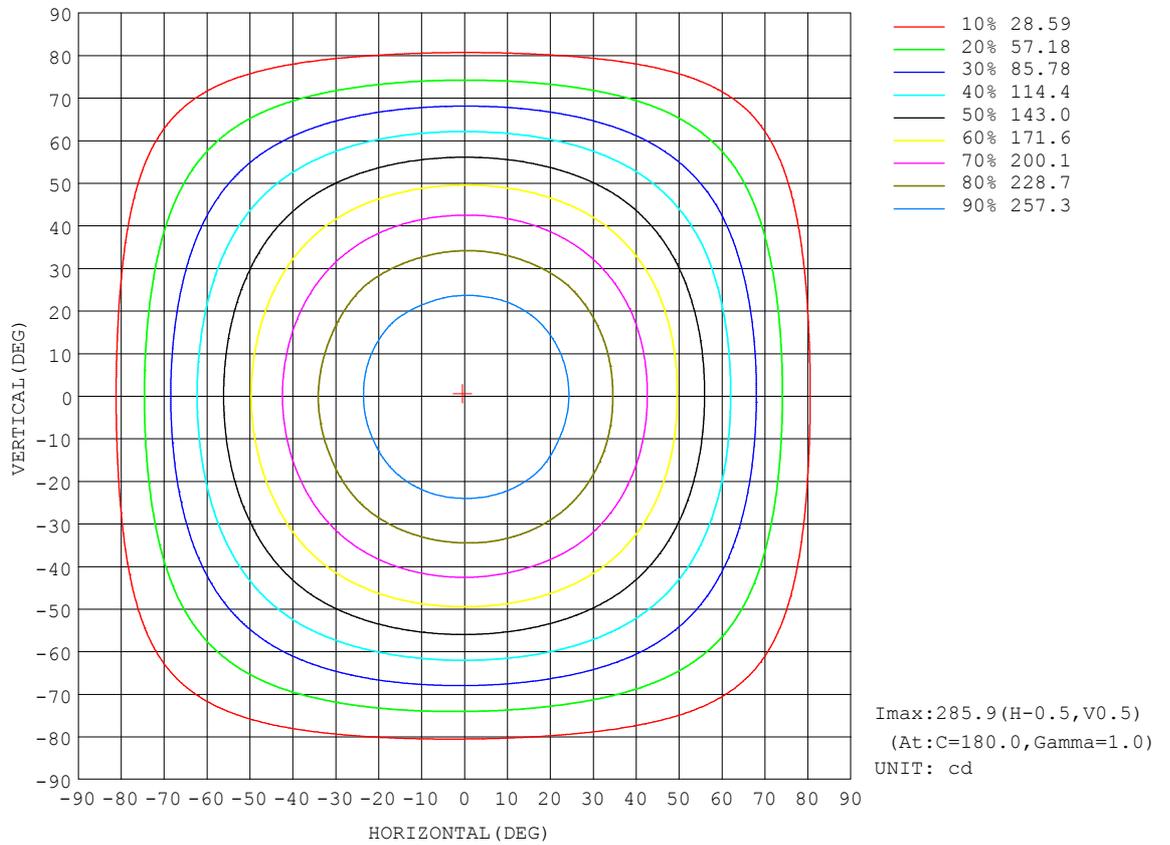


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

AAI Figure

Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.14lx1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

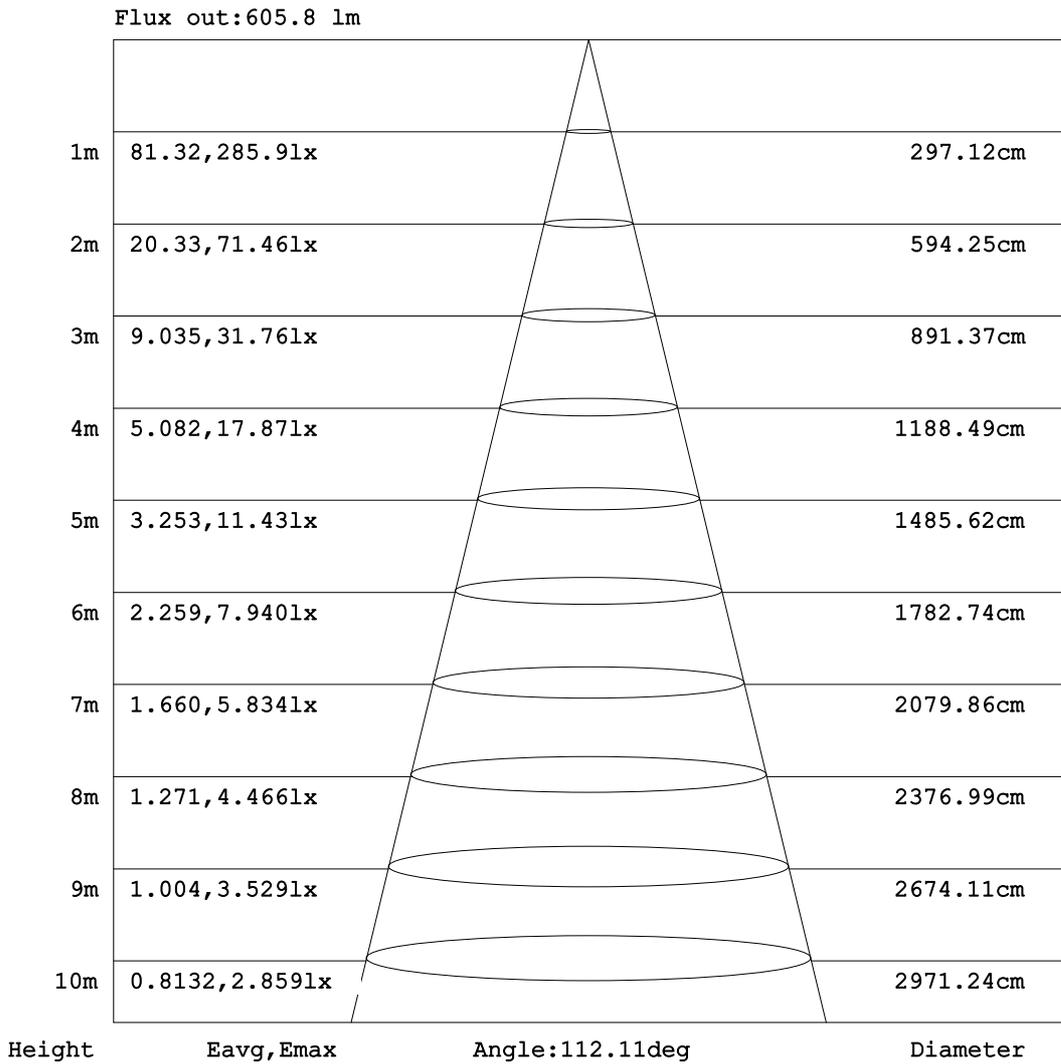


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2°C
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.14lx1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: ϕ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

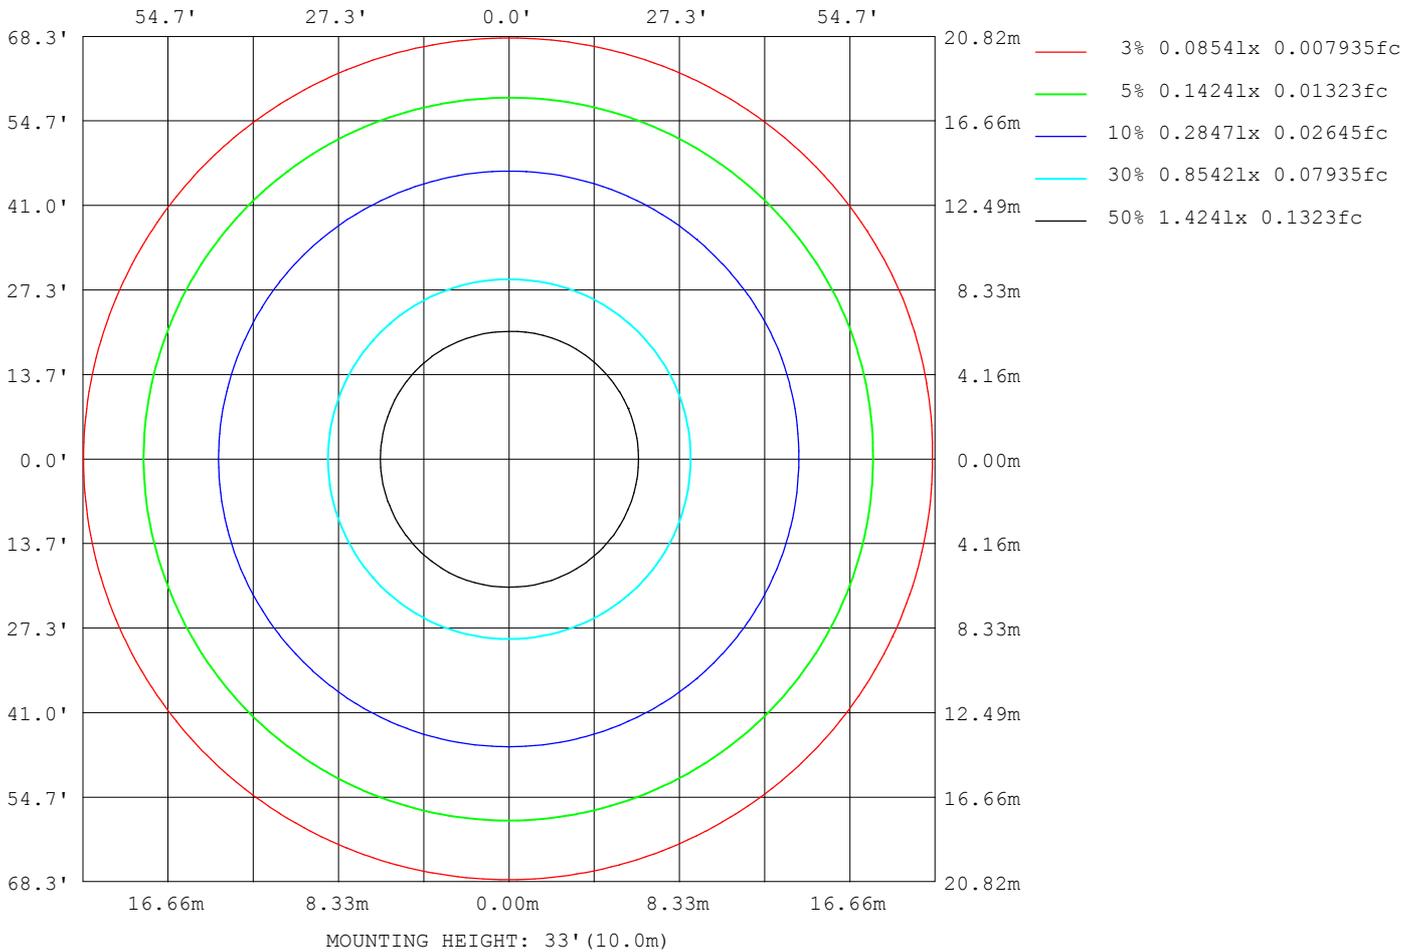

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Ethan
 Test Date: 2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.3%
 Test Distance: 26.000m [K=1.3807]
 Remarks:

Planar Illuminance Curve

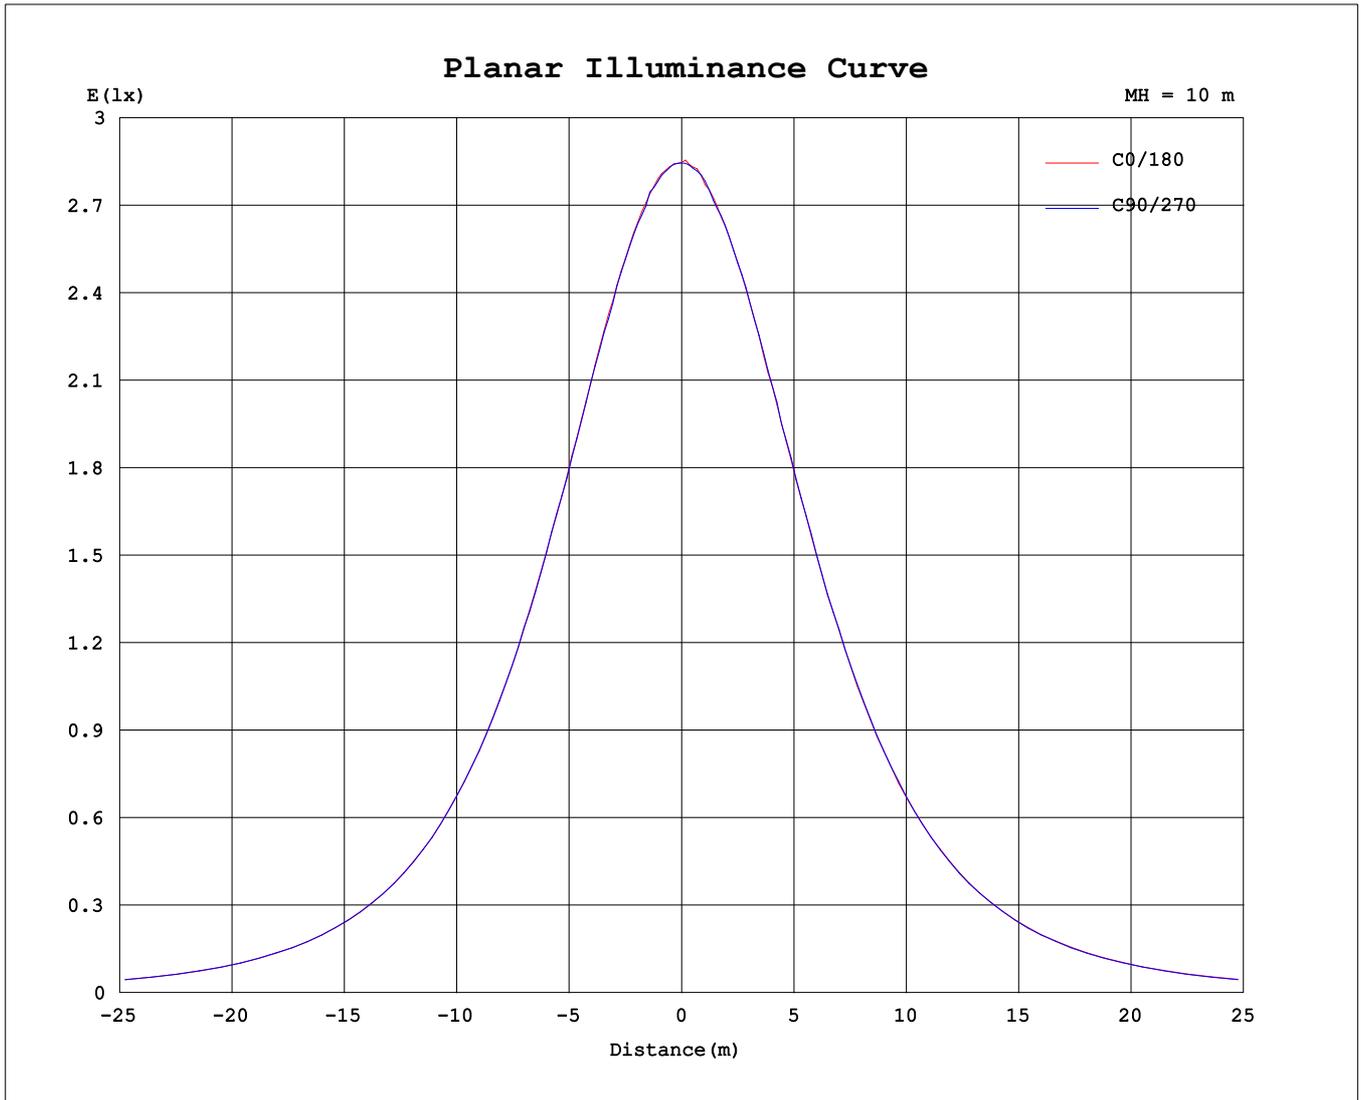

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Ethan
Test Date: 2022-05-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.459
Humidity: 55.3%
Test Distance: 26.000m [K=1.3807]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1072A P:12.68W PF:0.9845 Freq:60.01Hz Lamp Flux:813.14lx1 lm		
NAME: PD605-13S-952C5-120D-WH 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	285	285	285	285	285	285	285	285	285	285	285	285	285	285	285	285			
5	284	285	284	283	284	285	283	284	283	283	282	283	284	284	283	283			
10	280	280	280	281	279	281	280	279	278	279	279	279	279	280	280	280			
15	275	274	275	274	274	274	274	273	273	273	272	273	273	274	274	274			
20	267	267	266	266	266	266	265	264	264	264	264	265	265	266	267	266			
25	255	256	255	256	255	256	255	255	254	253	254	255	255	256	256	256			
30	243	243	243	242	243	243	242	241	241	241	240	241	242	242	243	243			
35	227	228	227	228	228	228	227	226	226	226	226	226	227	227	228	228			
40	210	210	210	211	209	210	209	208	209	208	208	210	209	210	210	212			
45	191	191	191	191	191	192	190	190	189	189	189	191	190	192	191	192			
50	170	170	170	170	169	170	170	169	170	170	169	169	170	171	171	171			
55	147	147	147	148	148	149	148	148	148	148	148	148	148	148	148	149			
60	124	124	123	124	124	125	125	124	125	125	124	125	124	125	125	126			
65	99.5	99.7	99.5	100	100	101	101	101	102	101	101	101	101	101	102	102			
70	75.9	75.8	75.5	75.7	76.2	77.6	77.6	77.7	78.0	77.9	76.8	76.9	77.3	77.3	77.7	77.6			
75	52.9	52.7	52.3	52.3	53.0	54.1	54.9	54.7	55.2	54.4	53.8	53.5	53.2	53.8	54.2	54.4			
80	30.8	30.5	30.0	30.2	30.9	31.9	32.5	32.6	33.6	32.7	31.8	31.3	31.3	31.6	32.1	32.2			
85	10.8	10.8	10.7	11.1	11.4	12.1	12.5	12.7	13.1	12.4	12.0	11.3	11.1	11.3	11.5	11.5			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.18	0.00	0.09	0.09		
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.00	0.09	0.09	0.09	0.09	0.09	0.09			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.09	0.18	0.09	0.18	0.18	0.18	0.09			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.18	0.18	0.18	0.27	0.18	0.18	0.27			
170	0.00	0.00	0.00	0.09	0.00	0.18	0.00	0.18	0.27	0.18	0.18	0.36	0.27	0.27	0.36	0.18			
175	0.09	0.18	0.27	0.36	0.27	0.36	0.18	0.18	0.27	0.18	0.27	0.27	0.45	0.45	0.36	0.36			
180	0.18	0.45	0.36	0.45	0.54	0.27	0.45	0.18	0.36	0.18	0.36	0.36	0.45	0.27	0.45	0.27			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Ethan
 Test Date:2022-05-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.459
 Humidity:55.3%
 Test Distance:26.000m [K=1.3807]
 Remarks: