
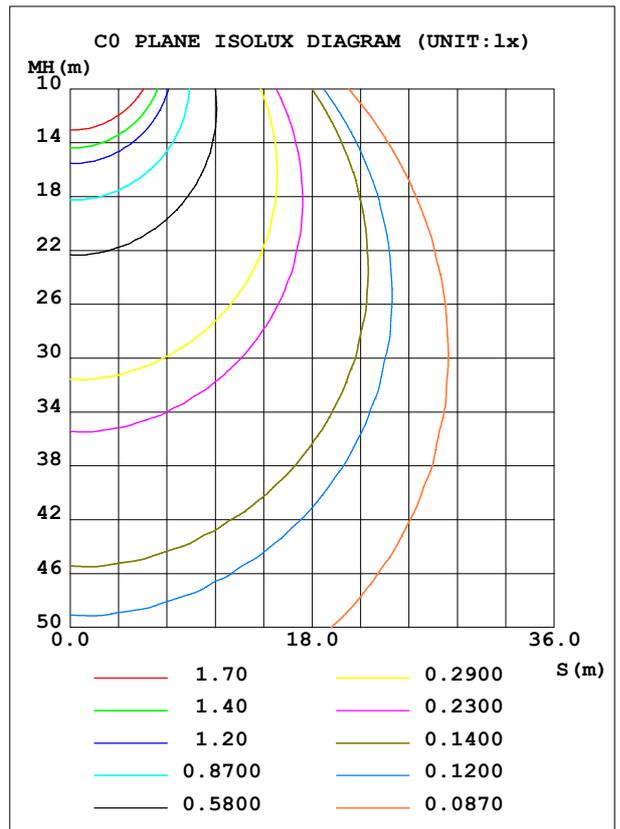


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 63.72 lm/W
MODEL		I <sub>max</sub> (cd)	290.5	S/MH (C0/180)		1.26
NOMINAL POWER (W)	13	LOR (%)	100.0	S/MH (C90/270)		1.26
RATED VOLTAGE (V)	100-277	TOTAL FLUX (lm)	825.22	η UP, DN (C0-180)		0.0, 49.9
NOMINAL FLUX (lm)	825.222	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 50.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX		1.35

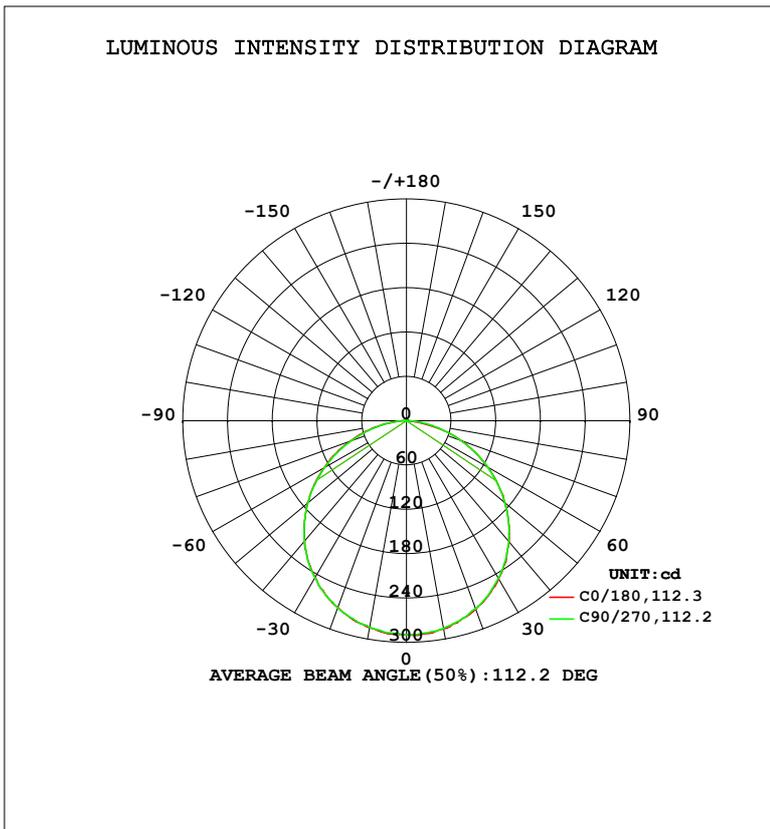

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.2 °C  
 Operators: Ethan  
 Test Date: 2022-05-27

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity: 55.3%  
 Test Distance: 26.000m [K=1.3807]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	286.0	285.7	285.5	284.1	284.9	284.1	283.9	283.9	0- 10	27.41	27.41	3.32,3.32
20	271.6	271.3	270.7	269.5	268.9	268.3	269.9	270.5	10- 20	78.64	106.0	12.9,12.9
30	247.3	247.0	246.5	245.4	244.8	245.6	245.8	246.3	20- 30	119.5	225.6	27.3,27.3
40	214.7	213.6	213.7	212.0	212.7	213.0	213.3	213.9	30- 40	144.4	370.0	44.8,44.8
50	172.2	172.7	172.4	171.7	173.1	172.4	172.6	172.9	40- 50	149.4	519.3	62.9,62.9
60	126.2	125.3	126.4	126.9	128.1	126.8	126.8	127.2	50- 60	134.2	653.5	79.2,79.2
70	77.40	76.70	77.08	78.74	79.89	78.61	77.85	78.58	60- 70	101.6	755.1	91.5,91.5
80	21.80	30.04	30.98	32.86	34.06	32.17	31.35	28.97	70- 80	56.95	812.0	98.4,98.4
90	0	0	0	0.0010	0	0	0	0	80- 90	13.00	825.1	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0000	825.1	100,100
110	0	0	0	0	0	0	0	0	100-110	0	825.1	100,100
120	0	0	0	0	0	0	0	0	110-120	0.0017	825.1	100,100
130	0	0	0	0	0	0	0	0	120-130	0	825.1	100,100
140	0	0	0	0	0.0895	0	0.0899	0	130-140	0.0043	825.1	100,100
150	0	0	0.0899	0	0.0895	0.0896	0.1800	0.0899	140-150	0.0247	825.1	100,100
160	0	0	0.1798	0	0.1790	0.1793	0.1800	0.2698	150-160	0.0495	825.1	100,100
170	0.3579	0.2689	0.4496	0.1799	0.2684	0.2716	0.2698	0.3596	160-170	0.0631	825.2	100,100
180	0.2723	0.2689	0.2698	0.1799	0.2684	0.2689	0.2698	0.4497	170-180	0.0287	825.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 445.33 lm

%lum = 54.0%

%lamp = 54.0%

Conical surface Flux(120deg): 653.53 lm

%lum = 79.2%


%lamp = 79.2%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.2℃  
 Operators:Ethan  
 Test Date:2022-05-27

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity:55.3%  
 Test Distance:26.000m [K=1.3807]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: $\phi$ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

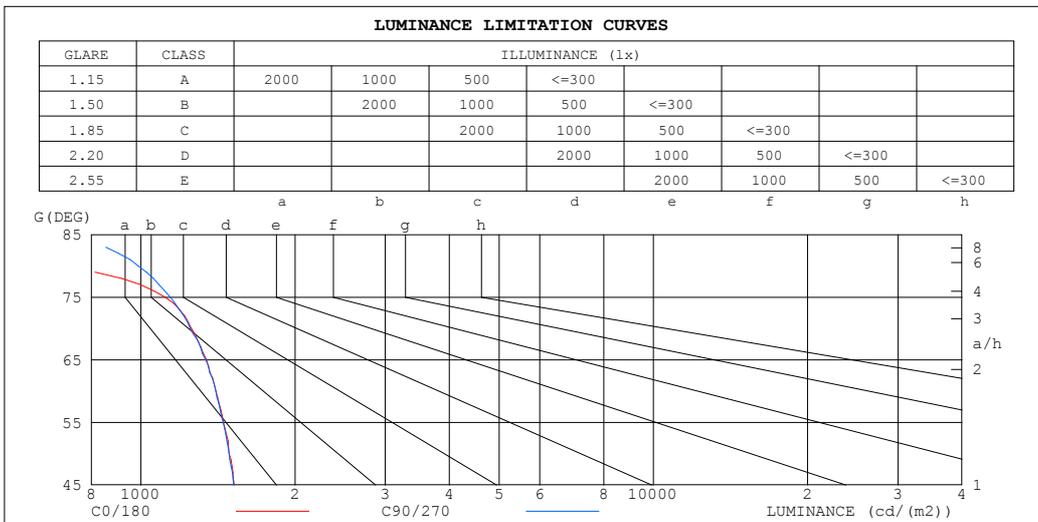

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	450	710
80	697	988
75	1117	1143
70	1256	1248
65	1343	1338
60	1400	1400
55	1449	1449
50	1486	1486
45	1521	1517


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.2°C  
 Operators: Ethan  
 Test Date: 2022-05-27

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity: 55.3%  
 Test Distance: 26.000m [K=1.3807]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization (CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.98	.94	.91	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.74	.79	.75	.72	.70
3.0	.80	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.54	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.51	.45	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

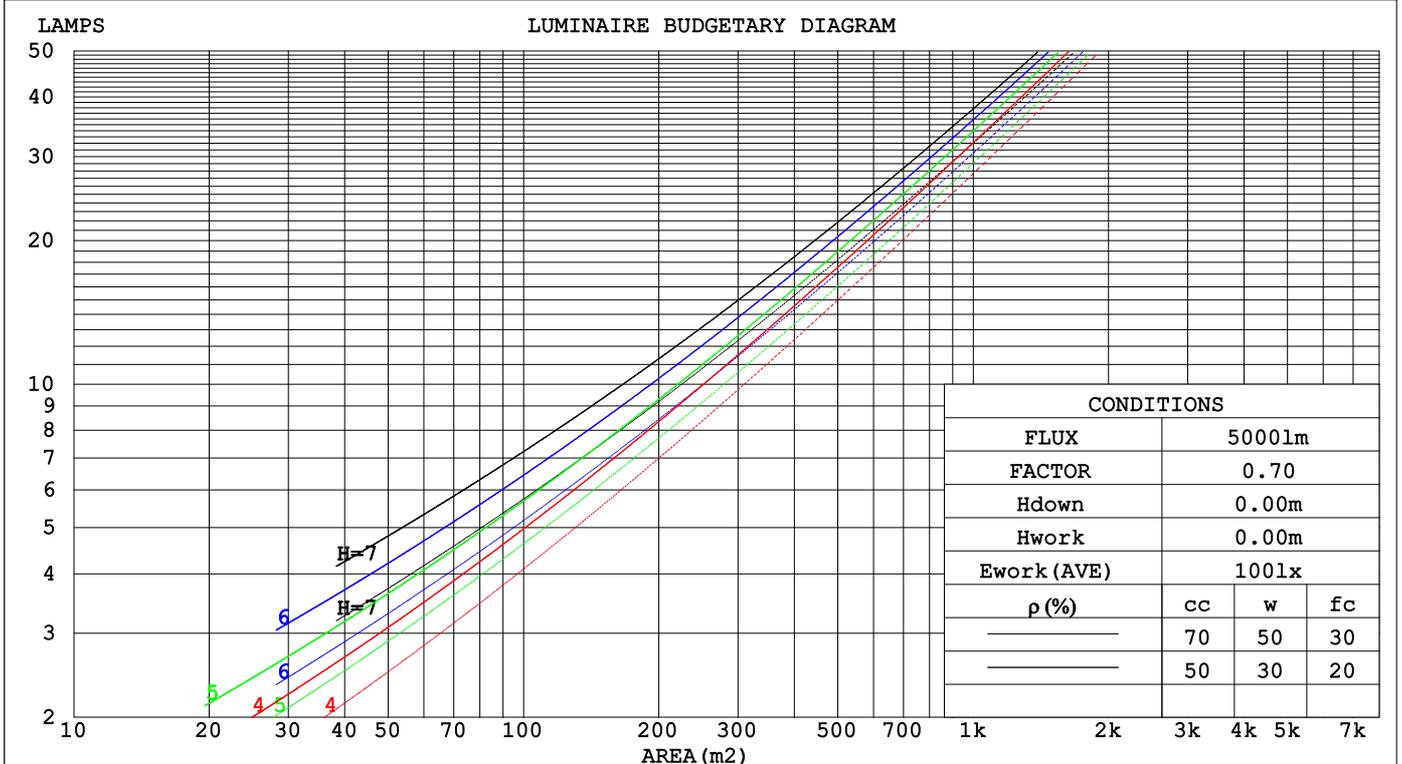

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.2°C  
 Operators:Ethan  
 Test Date:2022-05-27

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity:55.3%  
 Test Distance:26.000m [K=1.3807]  
 Remarks:

**WEC AND CCEC**

Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ρ <sub>cc</sub>	80%			70%			50%			30%			10%			0
ρ <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.306	.174	.055	.299	.171	.054	.286	.164	.052	.274	.158	.051	.262	.152	.049	
2.0	.290	.159	.049	.283	.156	.048	.272	.151	.047	.261	.146	.046	.251	.142	.045	
3.0	.269	.143	.043	.263	.141	.042	.253	.137	.042	.243	.133	.041	.234	.130	.040	
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036	
5.0	.230	.117	.034	.225	.116	.034	.217	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.183	.094	.027	.177	.092	.027	
8.0	.185	.091	.025	.182	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

ρ <sub>cc</sub>	80%			70%			50%			30%			10%			0
ρ <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.059	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.011	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.117	.065	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.2℃  
 Operators:Ethan  
 Test Date:2022-05-27

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity:55.3%  
 Test Distance:26.000m [K=1.3807]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.2	15.7	14.5	15.9	16.1	14.2	15.7	14.4	15.9	16.1
3H	15.7	17.1	16.0	17.3	17.5	15.6	17.0	15.9	17.3	17.5
4H	16.2	17.5	16.5	17.8	18.1	16.2	17.5	16.5	17.8	18.0
6H	16.5	17.7	16.8	18.0	18.3	16.6	17.8	16.9	18.1	18.4
8H	16.5	17.7	16.8	18.0	18.3	16.7	17.9	17.0	18.2	18.5
12H	16.5	17.6	16.8	17.9	18.2	16.7	17.9	17.1	18.2	18.5
4H 2H	14.8	16.1	15.1	16.4	16.6	14.8	16.1	15.1	16.4	16.6
3H	16.4	17.6	16.8	17.9	18.2	16.4	17.6	16.8	17.9	18.2
4H	17.1	18.2	17.5	18.5	18.8	17.1	18.2	17.5	18.5	18.8
6H	17.5	18.4	17.9	18.8	19.1	17.6	18.5	18.0	18.9	19.2
8H	17.5	18.4	17.9	18.8	19.1	17.7	18.6	18.1	19.0	19.4
12H	17.5	18.3	17.9	18.7	19.1	17.8	18.6	18.2	19.0	19.4
8H 4H	17.3	18.2	17.8	18.6	19.0	17.3	18.2	17.7	18.6	19.0
6H	17.8	18.6	18.3	19.0	19.4	18.0	18.7	18.4	19.1	19.5
8H	17.9	18.6	18.4	19.0	19.5	18.2	18.8	18.6	19.3	19.7
12H	18.0	18.5	18.5	19.0	19.5	18.3	18.9	18.8	19.3	19.8
12H 4H	17.4	18.2	17.8	18.5	19.0	17.3	18.1	17.8	18.5	18.9
6H	17.9	18.5	18.4	19.0	19.4	18.0	18.6	18.5	19.1	19.5
8H	18.0	18.6	18.5	19.0	19.5	18.3	18.8	18.7	19.3	19.7

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.2	+ 0.2 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3

CIE Pub.117, 825.2 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.7)  
Area: 0.18 m2

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.2℃  
Operators:Ethan  
Test Date:2022-05-27

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity:55.3%  
Test Distance:26.000m [K=1.3807]  
Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	87	78	71	84	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.2℃  
 Operators:Ethan  
 Test Date:2022-05-27

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity:55.3%  
 Test Distance:26.000m [K=1.3807]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: $\phi$ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

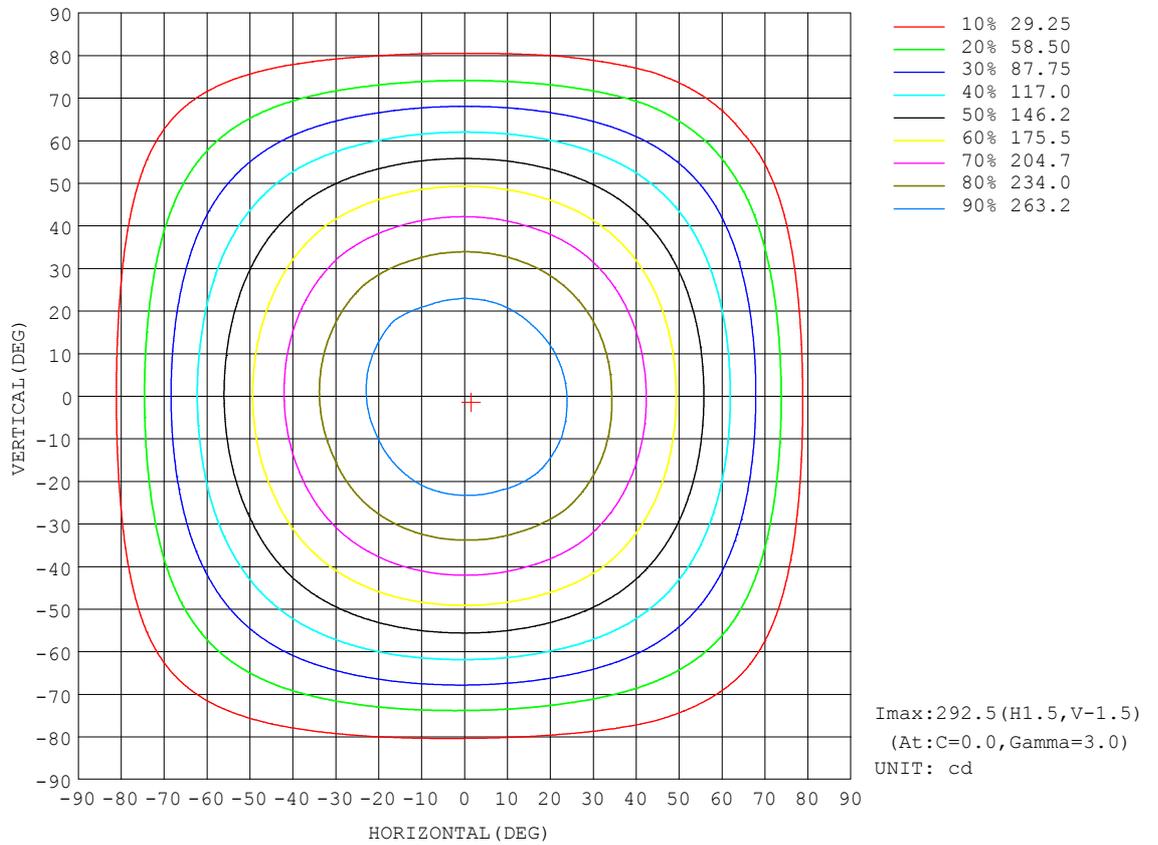


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.2°C  
 Operators:Ethan  
 Test Date:2022-05-27

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity:55.3%  
 Test Distance:26.000m [K=1.3807]  
 Remarks:

**AAI Figure**

Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: $\phi$ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

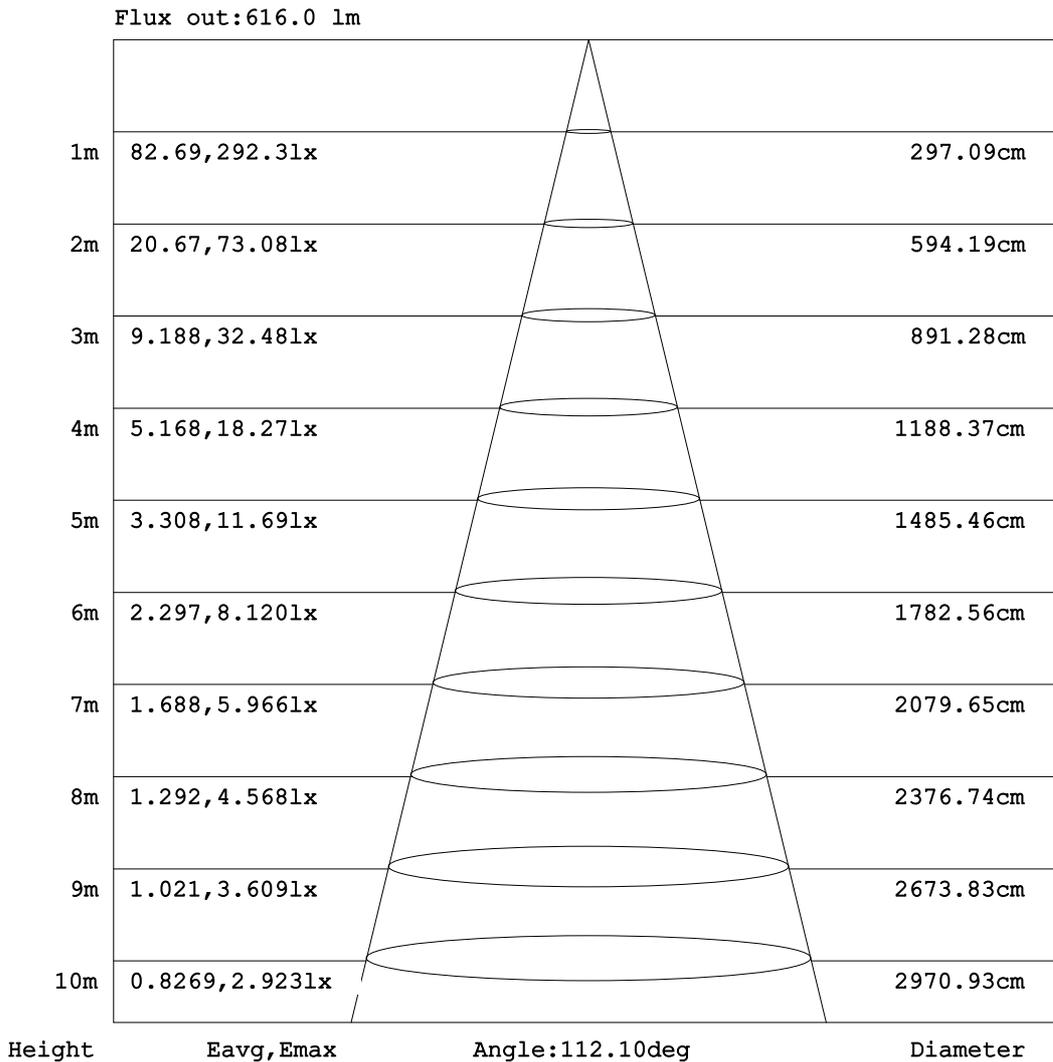


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.2°C  
 Operators:Ethan  
 Test Date:2022-05-27

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity:55.3%  
 Test Distance:26.000m [K=1.3807]  
 Remarks:

**ISOLUX DIAGRAM**


Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: $\phi$ 125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

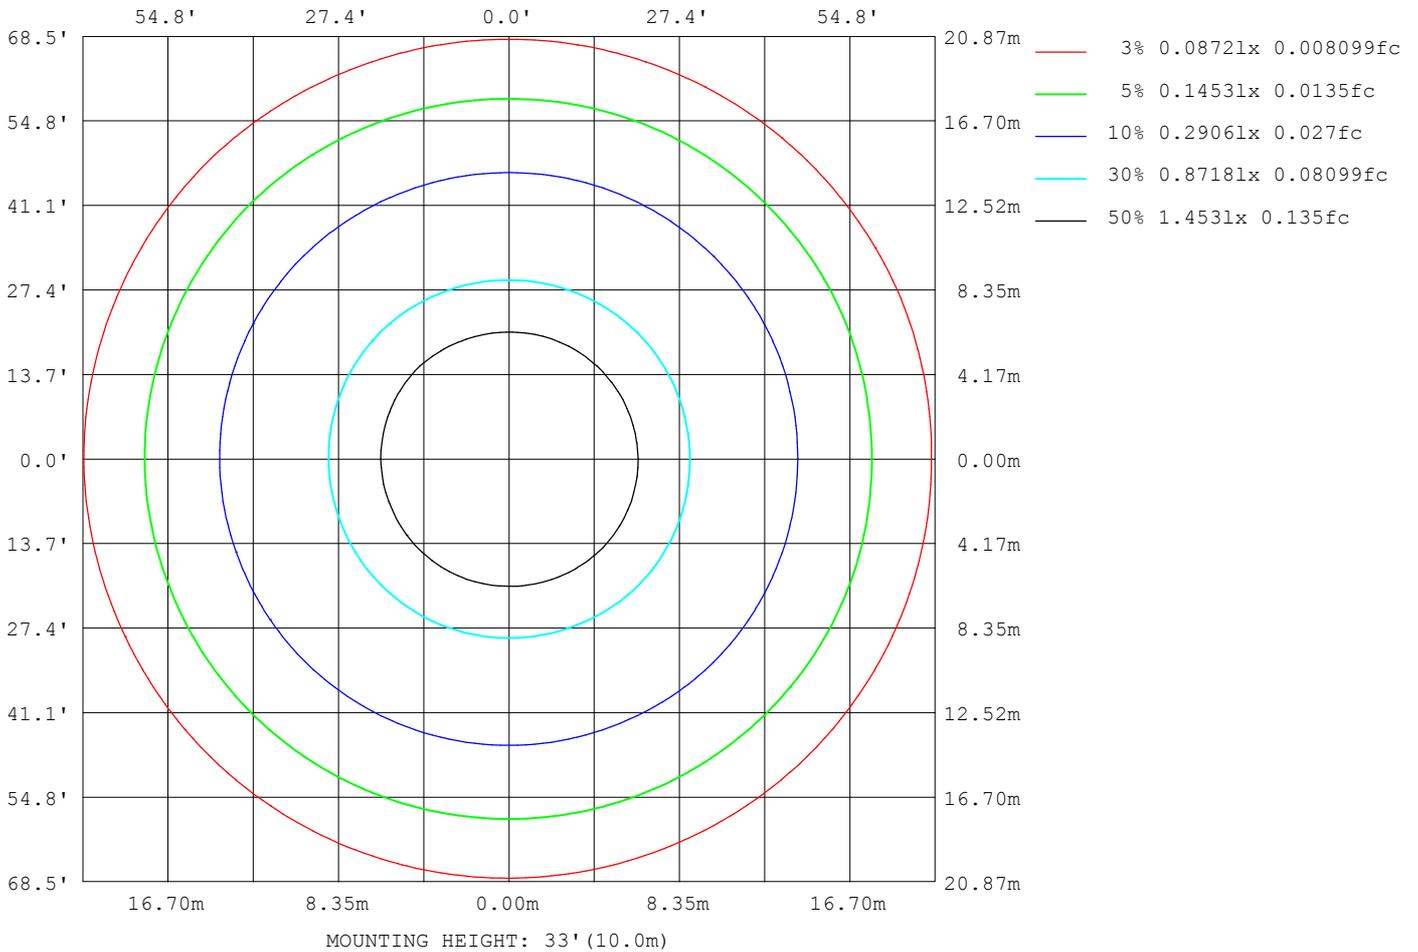

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.2°C  
 Operators:Ethan  
 Test Date:2022-05-27

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity:55.3%  
 Test Distance:26.000m [K=1.3807]  
 Remarks:

### Planar Illuminance Curve

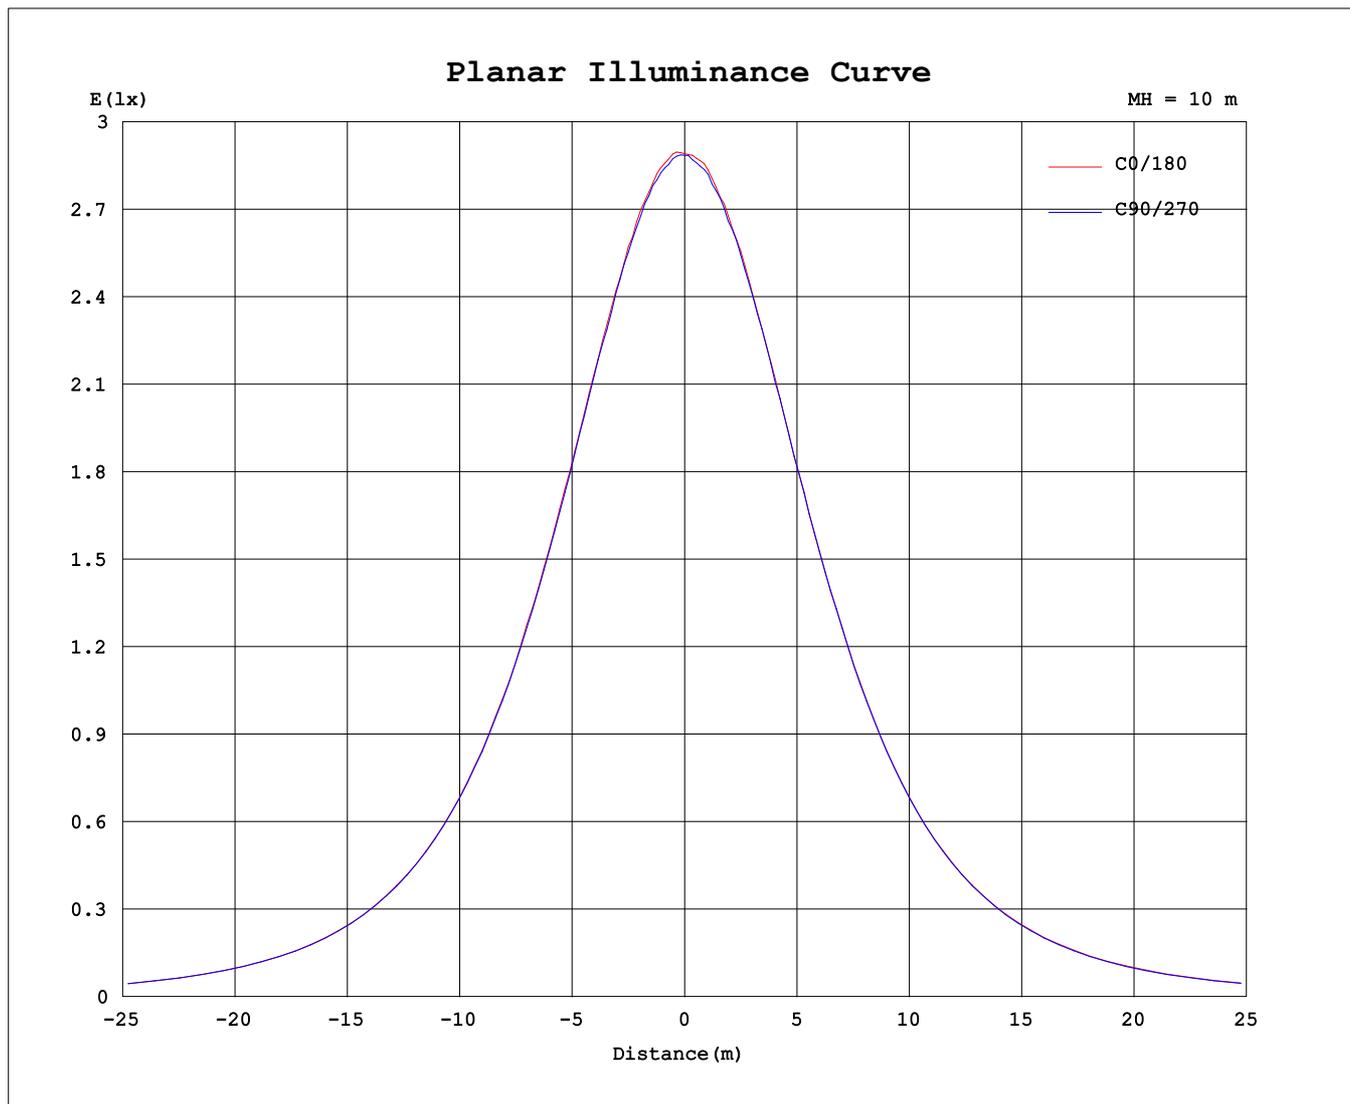

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.2°C  
Operators: Ethan  
Test Date: 2022-05-27

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
Humidity: 55.3%  
Test Distance: 26.000m [K=1.3807]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.1094A P:12.95W PF:0.9852 Freq:60.01Hz Lamp Flux:825.222x1 lm		
NAME: PD605-13S-952C5-120D-WH 5000K	TYPE:	WEIGHT:
SPEC.:	DIM.: φ125mm	SERIAL No.:
MFR.: FOSHAN LEDKEY LIGHTING CO.,LTD.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

γ (DEG) \ C (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289			
5	289	289	289	290	288	288	288	288	289	288	287	289	288	288	287	289			
10	286	285	286	286	285	285	284	285	285	285	284	284	284	284	284	285			
15	279	280	280	279	280	278	278	278	278	278	277	278	278	278	278	279			
20	272	272	271	272	271	270	269	270	269	269	268	269	270	270	270	271			
25	261	261	260	261	260	260	259	259	259	258	258	259	259	259	260	261			
30	247	247	247	248	247	246	245	245	245	245	246	246	246	246	246	248			
35	233	232	232	231	231	231	230	230	231	230	230	231	231	231	231	233			
40	215	214	214	214	214	213	212	212	213	212	213	213	213	214	214	215			
45	194	194	194	194	194	194	192	193	194	193	193	193	194	194	194	195			
50	172	172	173	173	172	173	172	173	173	172	172	173	173	173	173	173			
55	150	149	149	150	150	150	150	150	151	150	150	151	150	151	151	151			
60	126	126	125	126	126	127	127	127	128	127	127	128	127	127	127	127			
65	102	102	101	102	102	103	103	103	104	104	103	102	102	103	103	104			
70	77.4	76.8	76.7	76.8	77.1	78.4	78.7	79.1	79.9	79.4	78.6	78.6	77.8	78.4	78.6	78.7			
75	52.1	52.9	52.4	52.6	53.4	54.4	55.0	55.5	56.6	55.8	54.7	54.4	54.2	54.4	54.9	49.7			
80	21.8	27.1	30.0	30.5	31.0	32.2	32.9	33.2	34.1	33.0	32.2	31.5	31.3	31.8	29.0	21.1			
85	7.07	9.10	9.87	10.8	11.2	11.8	12.3	12.7	13.4	12.8	12.1	11.5	11.3	10.9	10.1	10.8			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	0.00	0.00	0.09	0.09	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00	0.09	0.09	0.09	0.09	0.09	0.00			
150	0.00	0.00	0.00	0.09	0.09	0.00	0.00	0.00	0.09	0.09	0.09	0.09	0.09	0.18	0.18	0.09			
155	0.00	0.00	0.00	0.00	0.18	0.18	0.00	0.00	0.18	0.18	0.18	0.18	0.09	0.18	0.18	0.18			
160	0.00	0.00	0.00	0.09	0.18	0.18	0.00	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.27			
165	0.27	0.27	0.09	0.18	0.27	0.18	0.27	0.36	0.18	0.36	0.35	0.36	0.36	0.27	0.18	0.27			
170	0.36	0.45	0.27	0.18	0.45	0.27	0.18	0.27	0.27	0.36	0.27	0.36	0.27	0.45	0.36	0.27			
175	0.27	0.27	0.36	0.27	0.27	0.27	0.18	0.27	0.27	0.36	0.45	0.27	0.27	0.36	0.36	0.18			
180	0.27	0.27	0.27	0.27	0.27	0.45	0.18	0.63	0.27	0.36	0.27	0.27	0.27	0.45	0.45	0.18			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.2℃  
 Operators:Ethan  
 Test Date:2022-05-27

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.459  
 Humidity:55.3%  
 Test Distance:26.000m [K=1.3807]  
 Remarks: