

IES INDOOR REPORT
PHOTOMETRIC FILENAME : PLB424000L30XX_IES.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] 102046181CHI-039
 [TESTLAB] INTERTEK
 [ISSUE DATE]
 [TESTDATE] 12/5/2016
 [MANUFAC] AFX INC.
 [LUMCAT] PLB424000L30EN
 [LUMINAIRE] LED OVERBED FIXTURE
 [LAMP] LED

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2421
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	46
Total Luminaire Watts	52.8
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	3.50 ft
Luminous Width (90-270)	0.46 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	3316	2739	1734
55	3995	3173	1704
65	5132	3881	1630
75	7637	5468	1475
85	20653	13931	1280

IES INDOOR REPORT
PHOTOMETRIC FILENAME : PLB424000L30XX_IES.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>	<u>202.5</u>
0.0	269.58	269.58	269.58	269.58	269.58	269.58	269.58	269.58	269.58	269.58
2.5	278.46	277.00	272.14	267.24	266.19	266.91	269.85	272.14	273.11	272.14
5.0	286.40	283.99	276.39	268.34	265.36	266.25	269.48	271.75	272.58	271.75
7.5	293.56	290.55	280.98	269.58	264.11	265.08	268.36	270.95	272.32	270.95
10.0	300.22	296.29	284.98	270.53	262.29	263.43	266.79	269.64	271.60	269.64
12.5	306.75	301.69	288.43	271.24	259.90	261.17	264.95	267.84	269.08	267.84
15.0	313.01	306.69	291.32	271.56	257.15	258.28	262.14	265.12	265.63	265.12
17.5	318.81	311.42	293.94	271.13	253.52	254.98	258.74	261.74	262.32	261.74
20.0	324.35	315.87	296.19	270.22	249.46	251.09	254.81	257.94	258.23	257.94
22.5	329.37	319.82	297.87	268.73	245.09	246.78	250.45	253.38	253.14	253.38
25.0	334.37	323.41	298.99	266.58	240.10	241.90	245.40	248.51	248.10	248.51
27.5	338.88	326.91	299.73	263.97	234.50	236.46	240.10	243.28	242.86	243.28
30.0	342.48	329.79	299.94	261.01	228.60	230.55	234.19	237.47	236.84	237.47
32.5	345.52	331.92	299.65	257.54	222.19	224.29	227.57	230.84	230.16	230.84
35.0	348.04	333.24	298.98	253.38	215.21	217.46	220.66	224.03	223.38	224.03
37.5	349.84	334.17	297.51	248.72	207.95	210.07	213.27	216.90	215.99	216.90
40.0	351.01	334.32	295.60	243.58	200.35	202.28	205.51	209.29	208.10	209.29
42.5	351.34	333.84	293.03	238.11	192.21	194.22	197.35	201.19	199.86	201.19
45.0	351.01	332.64	289.98	232.16	183.58	185.56	188.87	192.70	191.28	192.70
47.5	349.92	331.09	286.30	225.74	174.84	176.49	180.21	183.81	182.39	183.81
50.0	348.20	328.78	282.27	219.07	165.92	167.32	171.44	174.66	173.22	174.66
52.5	345.81	325.90	277.70	212.04	156.43	157.70	162.39	165.37	164.01	165.37
55.0	343.05	322.31	272.44	204.37	146.30	147.84	152.92	155.64	154.43	155.64
57.5	339.50	318.22	266.52	196.30	135.86	137.45	142.73	145.68	144.43	145.68
60.0	335.40	313.25	260.03	187.69	125.34	126.89	131.96	135.46	134.46	135.46
62.5	330.35	307.53	253.07	178.76	114.36	115.96	121.15	125.12	124.35	125.12
65.0	324.72	301.19	245.54	169.33	103.12	104.85	110.37	114.69	113.75	114.69
67.5	318.13	294.44	237.70	159.61	91.65	93.57	99.09	103.95	104.04	103.95
70.0	311.39	287.37	229.43	149.66	80.59	82.49	87.73	93.51	92.91	93.51
72.5	303.66	279.69	220.68	139.63	68.92	70.95	77.77	82.85	82.76	82.85
75.0	295.91	271.72	211.89	129.53	57.16	59.01	66.54	71.89	72.47	71.89
77.5	288.21	263.91	203.43	119.45	45.75	47.71	55.30	61.01	61.62	61.01
80.0	280.60	256.33	195.08	109.82	34.94	36.88	45.32	50.17	51.26	50.17
82.5	273.92	249.46	187.49	101.13	25.10	26.53	34.83	40.73	42.05	40.73
85.0	269.49	244.86	181.78	94.11	16.70	18.05	26.55	31.92	32.85	31.92
87.5	268.73	243.85	179.30	89.63	10.56	11.70	18.90	23.32	24.09	23.32
90.0	269.56	244.30	179.65	88.73	7.80	7.87	15.23	20.18	21.74	20.18
92.5	269.27	244.00	179.46	89.30	9.12	10.58	18.18	22.78	25.51	22.78
95.0	269.29	245.08	182.08	93.94	14.41	14.85	24.25	30.39	33.75	30.39
97.5	274.55	250.74	188.92	101.38	22.74	21.45	31.54	37.85	41.10	37.85
100.0	281.97	258.47	197.28	110.48	33.00	31.64	37.56	46.83	50.38	46.83
102.5	289.65	266.83	206.54	120.78	44.64	42.89	47.41	52.94	56.98	52.94
105.0	298.11	275.40	216.30	131.85	57.09	54.64	58.60	62.39	65.60	62.39
107.5	306.58	284.18	226.19	143.15	69.82	66.94	70.06	73.50	76.57	73.50
110.0	314.46	292.48	235.76	154.40	82.70	79.53	82.05	85.28	88.36	85.28
112.5	322.11	300.34	245.01	165.63	95.82	92.56	94.51	97.39	100.39	97.39
115.0	329.45	308.69	254.38	176.93	109.22	105.69	107.19	109.67	113.20	109.67
117.5	336.34	316.67	263.87	188.28	122.62	118.78	119.71	121.79	125.38	121.79
120.0	342.74	324.13	272.77	199.10	135.72	131.54	132.56	133.82	137.15	133.82
122.5	348.69	330.67	280.73	209.55	148.69	144.25	145.44	145.96	149.03	145.96
125.0	354.44	336.79	288.11	219.90	161.49	156.92	157.87	157.92	161.04	157.92
127.5	360.16	342.70	295.49	229.91	173.74	169.33	170.48	170.24	173.38	170.24
130.0	366.35	347.56	302.28	239.33	186.11	181.83	182.72	182.12	185.12	182.12
132.5	371.37	352.03	308.95	248.33	197.72	193.73	194.36	193.76	197.03	193.76

IES INDOOR REPORT
PHOTOMETRIC FILENAME : PLB424000L30XX_IES.IES

CANDELA TABULATION - (Cont.)

135.0	375.47	356.29	314.69	257.34	209.36	205.46	205.66	205.30	208.69	205.30
137.5	378.15	359.78	320.40	265.58	220.49	217.10	216.63	216.51	220.01	216.51
140.0	380.25	362.37	325.22	273.45	231.26	228.10	227.57	227.64	230.73	227.64
142.5	382.19	364.78	329.60	280.68	241.16	238.56	238.27	237.95	241.26	237.95
145.0	382.32	365.96	332.91	287.94	251.13	248.74	248.04	248.29	251.77	248.29
147.5	382.24	366.36	335.71	294.07	260.35	258.20	257.72	258.05	261.82	258.05
150.0	380.04	365.91	337.60	299.09	268.95	267.14	266.89	267.59	271.37	267.59
152.5	377.43	364.57	339.17	303.81	276.75	275.69	275.55	276.34	280.69	276.34
155.0	374.10	362.40	339.98	308.28	283.88	283.27	282.98	284.06	289.07	284.06
157.5	369.93	359.90	340.64	312.56	290.06	290.07	290.01	291.19	296.44	291.19
160.0	365.12	357.09	340.27	315.30	296.42	296.20	296.64	297.91	303.03	297.91
162.5	361.75	353.90	338.94	317.50	301.84	301.98	302.18	303.70	308.76	303.70
165.0	358.00	350.70	337.82	319.21	306.33	306.73	308.21	309.47	314.51	309.47
167.5	353.99	346.23	335.95	319.83	310.34	311.26	313.10	314.81	320.56	314.81
170.0	348.65	341.47	333.56	319.81	313.13	314.58	316.67	318.72	324.91	318.72
172.5	343.22	336.47	329.70	319.46	315.46	317.12	319.44	321.50	327.51	321.50
175.0	336.42	330.90	325.41	319.48	317.48	318.97	321.53	323.10	329.09	323.10
177.5	330.99	325.91	323.19	319.99	318.85	320.39	322.79	324.79	330.37	324.79
180.0	323.56	323.56	323.56	323.56	323.56	323.56	323.56	323.56	323.56	323.56

Vert. Angles **Horizontal Angles**

	<u>225.0</u>	<u>247.5</u>	<u>270.0</u>	<u>292.5</u>	<u>315.0</u>	<u>337.5</u>	<u>360.0</u>
0.0	269.58	269.58	269.58	269.58	269.58	269.58	269.58
2.5	269.85	266.91	266.19	267.24	272.14	277.00	278.46
5.0	269.48	266.25	265.36	268.34	276.39	283.99	286.40
7.5	268.36	265.08	264.11	269.58	280.98	290.55	293.56
10.0	266.79	263.43	262.29	270.53	284.98	296.29	300.22
12.5	264.95	261.17	259.90	271.24	288.43	301.69	306.75
15.0	262.14	258.28	257.15	271.56	291.32	306.69	313.01
17.5	258.74	254.98	253.52	271.13	293.94	311.42	318.81
20.0	254.81	251.09	249.46	270.22	296.19	315.87	324.35
22.5	250.45	246.78	245.09	268.73	297.87	319.82	329.37
25.0	245.40	241.90	240.10	266.58	298.99	323.41	334.37
27.5	240.10	236.46	234.50	263.97	299.73	326.91	338.88
30.0	234.19	230.55	228.60	261.01	299.94	329.79	342.48
32.5	227.57	224.29	222.19	257.54	299.65	331.92	345.52
35.0	220.66	217.46	215.21	253.38	298.98	333.24	348.04
37.5	213.27	210.07	207.95	248.72	297.51	334.17	349.84
40.0	205.51	202.28	200.35	243.58	295.60	334.32	351.01
42.5	197.35	194.22	192.21	238.11	293.03	333.84	351.34
45.0	188.87	185.56	183.58	232.16	289.98	332.64	351.01
47.5	180.21	176.49	174.84	225.74	286.30	331.09	349.92
50.0	171.44	167.32	165.92	219.07	282.27	328.78	348.20
52.5	162.39	157.70	156.43	212.04	277.70	325.90	345.81
55.0	152.92	147.84	146.30	204.37	272.44	322.31	343.05
57.5	142.73	137.45	135.86	196.30	266.52	318.22	339.50
60.0	131.96	126.89	125.34	187.69	260.03	313.25	335.40
62.5	121.15	115.96	114.36	178.76	253.07	307.53	330.35
65.0	110.37	104.85	103.12	169.33	245.54	301.19	324.72
67.5	99.09	93.57	91.65	159.61	237.70	294.44	318.13
70.0	87.73	82.49	80.59	149.66	229.43	287.37	311.39
72.5	77.77	70.95	68.92	139.63	220.68	279.69	303.66
75.0	66.54	59.01	57.16	129.53	211.89	271.72	295.91
77.5	55.30	47.71	45.75	119.45	203.43	263.91	288.21
80.0	45.32	36.88	34.94	109.82	195.08	256.33	280.60

IES INDOOR REPORT
PHOTOMETRIC FILENAME : PLB424000L30XX_IES.IES

CANDELA TABULATION - (Cont.)

82.5	34.83	26.53	25.10	101.13	187.49	249.46	273.92
85.0	26.55	18.05	16.70	94.11	181.78	244.86	269.49
87.5	18.90	11.70	10.56	89.63	179.30	243.85	268.73
90.0	15.23	7.87	7.80	88.73	179.65	244.30	269.56
92.5	18.18	10.58	9.12	89.30	179.46	244.00	269.27
95.0	24.25	14.85	14.41	93.94	182.08	245.08	269.29
97.5	31.54	21.45	22.74	101.38	188.92	250.74	274.55
100.0	37.56	31.64	33.00	110.48	197.28	258.47	281.97
102.5	47.41	42.89	44.64	120.78	206.54	266.83	289.65
105.0	58.60	54.64	57.09	131.85	216.30	275.40	298.11
107.5	70.06	66.94	69.82	143.15	226.19	284.18	306.58
110.0	82.05	79.53	82.70	154.40	235.76	292.48	314.46
112.5	94.51	92.56	95.82	165.63	245.01	300.34	322.11
115.0	107.19	105.69	109.22	176.93	254.38	308.69	329.45
117.5	119.71	118.78	122.62	188.28	263.87	316.67	336.34
120.0	132.56	131.54	135.72	199.10	272.77	324.13	342.74
122.5	145.44	144.25	148.69	209.55	280.73	330.67	348.69
125.0	157.87	156.92	161.49	219.90	288.11	336.79	354.44
127.5	170.48	169.33	173.74	229.91	295.49	342.70	360.16
130.0	182.72	181.83	186.11	239.33	302.28	347.56	366.35
132.5	194.36	193.73	197.72	248.33	308.95	352.03	371.37
135.0	205.66	205.46	209.36	257.34	314.69	356.29	375.47
137.5	216.63	217.10	220.49	265.58	320.40	359.78	378.15
140.0	227.57	228.10	231.26	273.45	325.22	362.37	380.25
142.5	238.27	238.56	241.16	280.68	329.60	364.78	382.19
145.0	248.04	248.74	251.13	287.94	332.91	365.96	382.32
147.5	257.72	258.20	260.35	294.07	335.71	366.36	382.24
150.0	266.89	267.14	268.95	299.09	337.60	365.91	380.04
152.5	275.55	275.69	276.75	303.81	339.17	364.57	377.43
155.0	282.98	283.27	283.88	308.28	339.98	362.40	374.10
157.5	290.01	290.07	290.06	312.56	340.64	359.90	369.93
160.0	296.64	296.20	296.42	315.30	340.27	357.09	365.12
162.5	302.18	301.98	301.84	317.50	338.94	353.90	361.75
165.0	308.21	306.73	306.33	319.21	337.82	350.70	358.00
167.5	313.10	311.26	310.34	319.83	335.95	346.23	353.99
170.0	316.67	314.58	313.13	319.81	333.56	341.47	348.65
172.5	319.44	317.12	315.46	319.46	329.70	336.47	343.22
175.0	321.53	318.97	317.48	319.48	325.41	330.90	336.42
177.5	322.79	320.39	318.85	319.99	323.19	325.91	330.99
180.0	323.56	323.56	323.56	323.56	323.56	323.56	323.56

IES INDOOR REPORT
PHOTOMETRIC FILENAME : PLB424000L30XX_IES.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	103.97	N.A.	4.30
0-30	228.45	N.A.	9.40
0-40	388.87	N.A.	16.10
0-60	754.55	N.A.	31.20
0-80	1062.95	N.A.	43.90
0-90	1169.09	N.A.	48.30
10-90	1142.99	N.A.	47.20
20-40	284.90	N.A.	11.80
20-50	466.08	N.A.	19.30
40-70	535.02	N.A.	22.10
60-80	308.39	N.A.	12.70
70-80	139.05	N.A.	5.70
80-90	106.14	N.A.	4.40
90-110	242.74	N.A.	10.00
90-120	415.23	N.A.	17.20
90-130	609.54	N.A.	25.20
90-150	986.97	N.A.	40.80
90-180	1251.73	N.A.	51.70
110-180	1008.99	N.A.	41.70
0-180	2420.82	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	26.09
10-20	77.88
20-30	124.48
30-40	160.42
40-50	181.18
50-60	184.50
60-70	169.34
70-80	139.05
80-90	106.14
90-100	105.16
100-110	137.58
110-120	172.49
120-130	194.31
130-140	197.45
140-150	179.98
150-160	142.85
160-170	90.98
170-180	30.93


IES INDOOR REPORT
PHOTOMETRIC FILENAME : PLB424000L30XX_IES.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	55	55	55	48
1	95	90	86	81	87	83	79	75	69	66	63	57	54	52	45	43	42	36
2	86	78	71	65	79	71	65	60	59	55	51	48	45	42	38	36	34	29
3	78	67	59	53	71	62	55	49	52	46	42	42	38	35	33	30	28	23
4	71	59	51	44	65	54	47	41	45	40	35	37	33	29	29	26	23	19
5	65	52	44	37	59	48	40	35	40	34	30	33	28	25	26	23	20	17
6	60	47	38	32	54	43	35	30	36	30	26	30	25	21	24	20	17	14
7	55	42	34	28	50	39	31	26	33	27	22	27	22	19	21	18	15	12
8	51	38	30	24	46	35	28	23	30	24	20	24	20	16	20	16	13	11
9	47	35	27	21	43	32	25	20	27	21	17	22	18	15	18	14	12	10
10	44	32	24	19	40	29	22	18	25	19	15	21	16	13	17	13	11	9

POLAR GRAPH

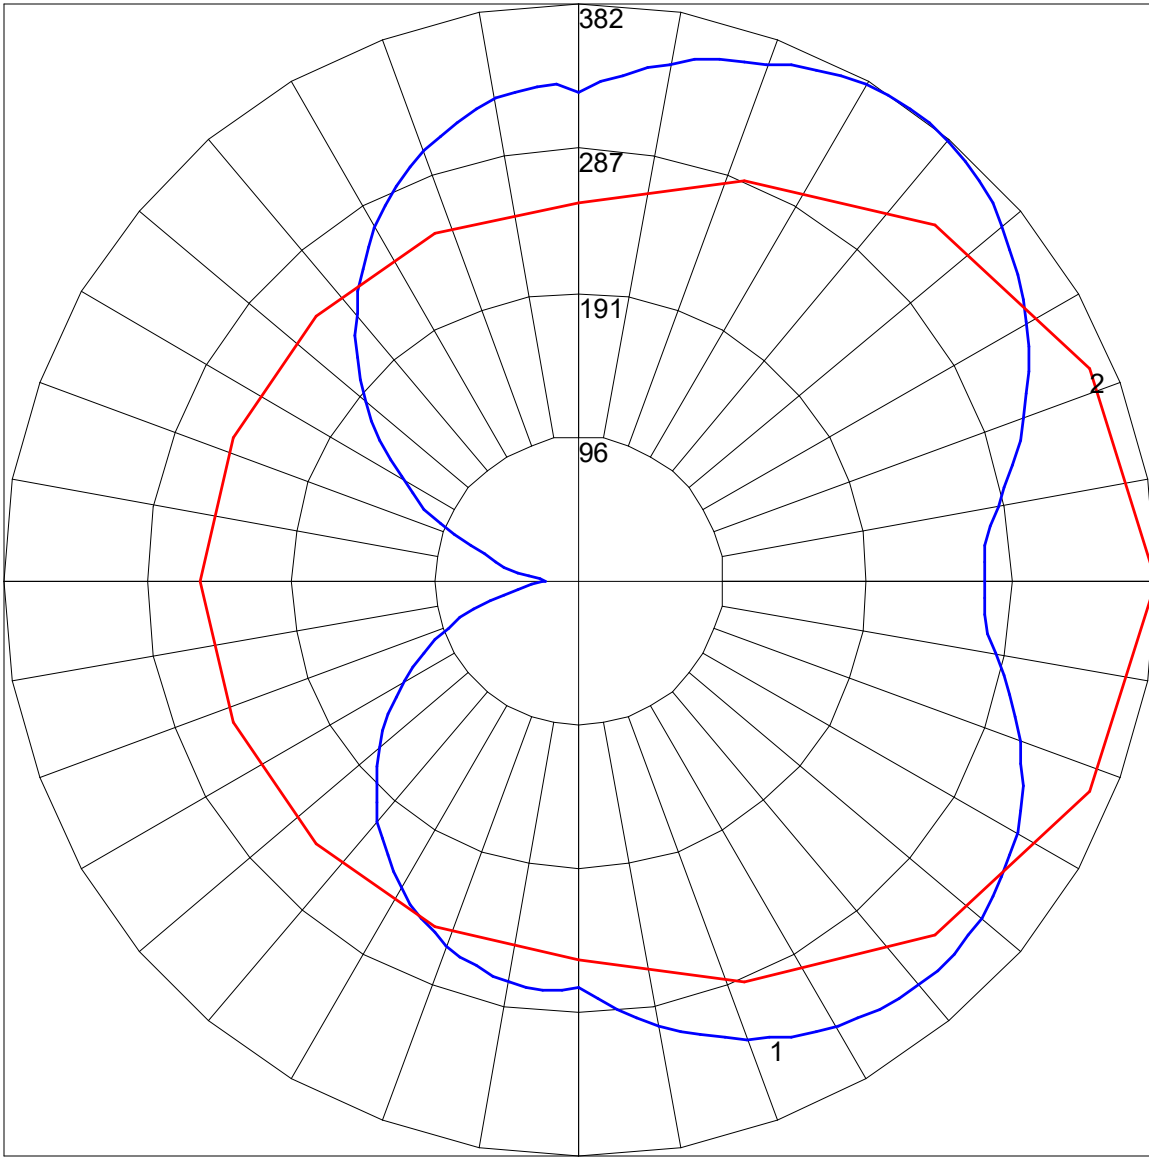

Maximum Candela = 382.32 Located At Horizontal Angle = 0, Vertical Angle = 145
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (145) (Through Max. Cd.)