



## Atlas ATL/ATLF Series

### Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

### Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

### Finish

Satin Nickel or Oil-Rubbed Bronze frame finish.

### Diffuser

White diffuser is made of engineered LED acrylic material.

### Electrical

Input 120VAC / 60 Hz.

The LED driver is dimmable with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

### LED

Fixture includes LED modules capable of producing:

26W = 2600 source lumens

39W = 3900 source lumens

3000K (CCT). Rated for 50,000 Hrs., 90 CRI.

### Certification

All fixtures are cETLus listed for damp locations.

ENERGY STAR® Qualified

Title 24/JA8 Compliant

### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.



### Specifications and dimensions

subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



**Limited Quantities Remain.  
Consult Factory.**

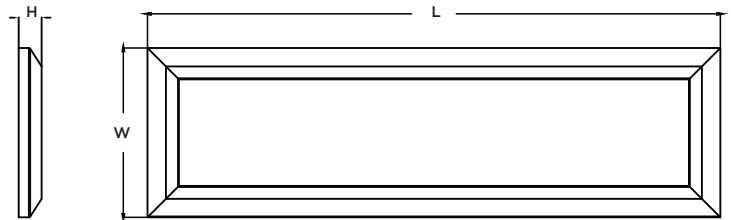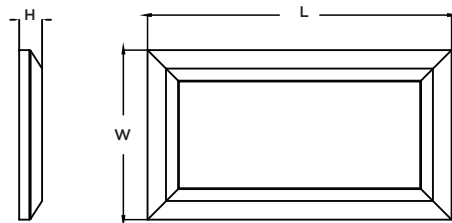

## Ordering Information:

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	CCT	L	W	H
ATLF12241800L30D1SN	ATL12483200L30D1RB	26W	2600	3000K	26-3/4"	15"	2"
ATL12483200L30D1SN		39W	3900	3000K	50-3/8"	15"	2"

### Wall Dimmer Compatibility Chart

Product can be dimmed to 10% of full scale using a standard two-wire dimmer.

Brand	Model #
Lutron®	MACL-153M