



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

*
Bailey LED Linear
BAYL Series

Features

Decorative linear fixture with a metal finish and a white acrylic diffuser. Ideal use in hallways, entrances or anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).



Bi-Level Motion Sensor (Optional '-MS')

- Built-in daylight sensor
- Detection area, time delay and daylight threshold can be precisely set via DIP switch
- Wide detection area, range up to 50 ft. (16 m) max

Emergency Back-Up (Optional '-BB') - 46" ONLY

- 90 minute run-time
- 7.4V 2500 mAh Lithium Ion Battery
- 8 watts

Construction

Die-formed steel construction. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Black or Satin Nickel.

Diffuser

White acrylic.

Electrical

Input 120-277 VAC 60 HZ.
 Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers. TRIAC and ELV dimming only at 120 VAC.

LED

Integrated LED modules capable of producing:
 25W = 1875 delivered lumens
 45W = 3975 delivered lumens
 Selectable 2700K, 3000K, 3500K, 4000K, 5000K (CCT).
 Rated for 50,000 Hrs., 90 CRI.

Certification

All fixtures are cETLus listed for indoor damp locations.
 *Title 24/JA8 Compliant


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Products ordered with battery back-up:

Fixture must be installed and the battery energized within six months of the purchase date to remain eligible for warranty coverage. Failure to comply may result in complete battery discharge, rendering it irrecoverable and thereby voiding the warranty.

Specifications and dimensions subject to change without notice.

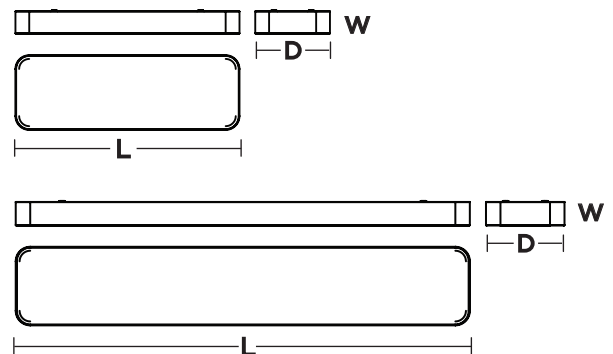

Ordering Information:

Black	Satin Nickel	LED	Delivered Lumens	Adjustable CCT	L	W	D
BAYL2408LAJUDBK*	BAYL2408LAJUDSN*	25W	1875	2700K/3000K/3500K/4000K/5000K	23-3/4"	8"	2-1/2"
BAYL2408LAJUDBK-MS	BAYL2408LAJUDSN-MS	25W	1875	2700K/3000K/3500K/4000K/5000K	23-3/4"	8"	2-1/2"
BAYL4608LAJUDBK*	BAYL4608LAJUDSN*	45W	3975	2700K/3000K/3500K/4000K/5000K	45-1/2"	8"	2-1/2"
BAYL4608LAJUDBK-MS	BAYL4608LAJUDSN-MS	45W	3975	2700K/3000K/3500K/4000K/5000K	45-1/2"	8"	2-1/2"
BAYL4608LAJUDBK-BB	BAYL4608LAJUDSN-BB	45W	3975	2700K/3000K/3500K/4000K/5000K	45-1/2"	8"	2-1/2"
BAYL4608LAJUDBK-MSBB	BAYL4608LAJUDSN-MSBB	45W	3975	2700K/3000K/3500K/4000K/5000K	45-1/2"	8"	2-1/2"