



Boon LED Flush Mount BOF Series

Features

Decorative cut metal with edge-lit panel construction. Ideal use in kitchens, hallways, and anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed steel. Standard mounting holes and hardware included. Power supply connections must be made inside junction box (not included).

Finish

Painted White or Black metal finish.

Diffuser

White acrylic.

Electrical

D1 Driver

Input 120 VAC, 60 Hz. The LED driver is dimmable with a 2-wire (TRIAC) or electronic low voltage (ELV) dimmer switch.

D2 Driver

Input 120-277 VAC 60 Hz. LED driver is dimmable 0-10V DC.

LED

Integrated LED modules capable of producing:
17.5W = 1400 source lumens, 823 delivered lumens
31W = 2600 source lumens, 1551 delivered lumens
3000K (CCT). Rated for 50,000 Hrs. 90 CRI.

Certification

All fixtures are cETLus listed for indoor damp locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.


Specifications and dimensions

subject to change without notice.


LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



**Limited Quantities Remain.
Consult Factory.**

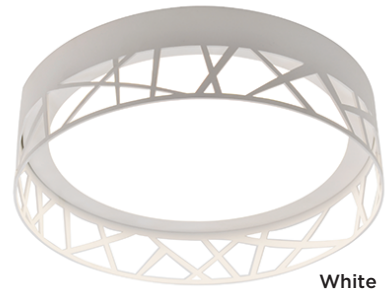

White

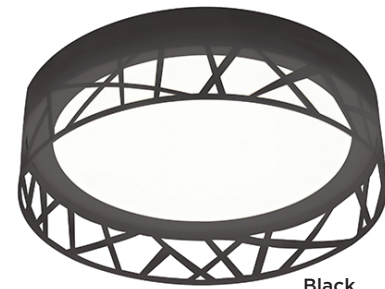

Black



Ordering Information:

White	Black	LED	Source Lumens	Delivered Lumens	CCT	DIA.	D
BOF121400L30D1WH	BOF121400L30D1BK	17.5W	1400	823	3000K	12"	4"
BOF121400L30D2WH	BOF121400L30D2BK	17.5W	1400	823	3000K	12"	4"
BOF162600L30D1WH	BOF162600L30D1BK	31W	2600	1511	3000K	16"	4-1/2"
BOF162600L30D2WH	BOF162600L30D2BK	31W	2600	1511	3000K	16"	4-1/2"