



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Brio LED Sconce BRS Series

Features

Half-round wall mount sconce offers high quality decorative extruded aluminum bands. Open top and bottom for wall wash effect. Fixture mounts to standard junction box (not included).

Construction

Back plate is die-formed of 22-gauge steel. Decorative bands are .060" extruded aluminum with an apparent thickness of .100" that are screwed to a 22-gauge back plate. Power supply connections must be made inside a junction box (not included).

Finish

Available in satin nickel or oil-rubbed bronze finish.

Diffuser

Diffuser is .100" thick matte white extruded acrylic lens that installs from the top and slides into position. Allow 18" from top of fixture to any obstruction to clear lens installation.

Electrical

Input 120-277 VAC 60 Hz. 0.14A at 120 VAC.
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers. TRIAC and ELV dimming only at 120VAC.

LED

Integrated LED modules capable of producing:
17W, 1400 source lumens
Adjustable Choice 3000K, 3500K, 4000K (CCT).
Rated for 50,000 Hrs. 90 CRI.

Certification

All fixtures are cETLus listed for indoor damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.


Ordering Information:

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	Adjustable CCT	H	W	D	MC
BRS071814LAJUDSN	BRS071814LAJUDRB	17W	1400	3000K/3500K/4000K	18"	7-1/4"	4"	9"

**Limited Quantities Remain.
Consult Factory.**



3in1 color temperature
3000K/3500K/4000K

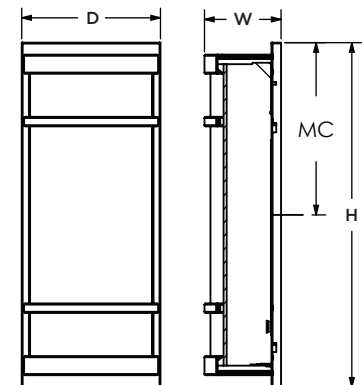

MC - Mounting Center