



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Brio LED Sconce BRW Series

Features

Half round wall mount sconce offers decorative extruded aluminum bands. Open top and bottom for wall wash effect. Fixture mounts to standard junction box (not included).

Construction

Back plate is die-formed of 22-gauge steel. Decorative bands are .060" extruded aluminum with an apparent thickness of .100" that are screwed to a 22-gauge back plate. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Back plate and bands are finished in satin nickel.

Diffuser

Diffuser is .100" thick matte white extruded acrylic lens that installs from the top and slides into position. Allow 18" from top of fixture to any obstruction to clear lens installation.

Electrical

This unit is direct wired with a low voltage electronic LED driver. The constant current LED driver is rated for 120-277 VAC input, And is 0-10V dimmable (D2).

Lamping

Fixture includes LED Modules capable of producing 1400 or 2200 lumens at 3000K CCT. Rated for 50,000 hrs.


Certification

All fixtures are cETLus listed for wet locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

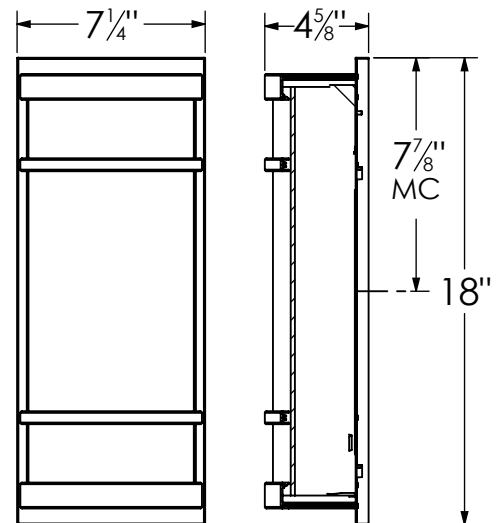

MC - Mounting Center

Ordering Information:

Satin Nickel	LED	Source Lumens	H	W	D
BRW07181400L30D2SN	20W	1400	18"	7-1/4"	4-5/8"
BRW07182100L30D2SN	30W	2100	18"	7-1/4"	4-5/8"