



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

## Cirrus LED Flush Mount - Universal Driver C2F Series

### Features

A round floating cloud style with a white diffuser. Adjustable output on 14" model. Ideal use in kitchens, hallways, and anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).



### Emergency Back-Up (Optional '-BB') Excludes 11"

- 90 minute run-time
- 7.4V 2500 mAh Lithium Ion Battery
- 8 watts

### Construction

A 22-gauge steel housing made by stamping process and painted in lighting grade white. Standard mounting holes and hardware included. Power supply connections must be made inside a junction box (not included).

### Finish

White finish.

### Diffuser

Smooth white acrylic diffuser.

### Electrical

Input 120-277VAC / 60 Hz.  
0-10V dimming (120-277V), TRIAC/ELV (120V)

### LED

Integrated LED modules capable of producing:

- 11" - 17W = 1520 delivered lumens
  - 14" - 17/34W = 1360/2690 delivered lumens
  - 19" - 34W = 2930 delivered lumens
- Adjustable Choice 2700K, 3000K, 3500K, 4000K, 5000K (CCT).  
Rated for 50,000 Hrs. 90 CRI.

### Certification

All fixtures are cETLus listed for indoor damp locations.  
T24-JA8 Compliant.  
Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.


### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

### Products ordered with battery back-up:

Fixture must be installed and the battery energized within six months of the purchase date to remain eligible for warranty coverage. Failure to comply may result in complete battery discharge, rendering it irrecoverable and thereby voiding the warranty.

Specifications and dimensions subject to change without notice.

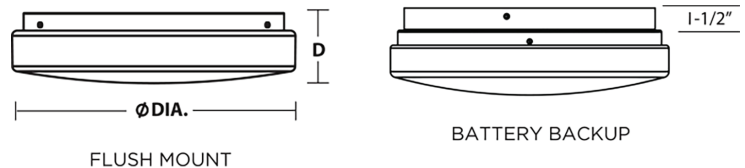

FLUSH MOUNT

BATTERY BACKUP

## Ordering Information:

White	LED	Delivered Lumens	Adjustable CCT	DIA.	D
C2F11L5AJUDWH	17W	1520	2700K/3000K/3500K/4000K/5000K	11"	3-1/4"
C2F14L5AJUDWH	17W/34W	1360/2690	2700K/3000K/3500K/4000K/5000K	14"	3-3/8"
C2F14L5AJUDWH-BB	17W/34W	1360/2690	2700K/3000K/3500K/4000K/5000K	14"	3-3/8"
C2F19L5AJUDWH	34W	2930	2700K/3000K/3500K/4000K/5000K	19"	3-3/8"
C2F19L5AJUDWH-BB	34W	2930	2700K/3000K/3500K/4000K/5000K	19"	3-3/8"