



## Carlisle LED Flush Mount - Adjustable CCT CAF Series

### Features

Metal trim bands with a white floating diffuser. Ideal use in kitchens, hallways, and anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).

### Construction

A 22-gauge steel pan made by stamping process and painted in lighting grade white. A vacuum formed diffuser is secured with decorative dual metal bands. Standard mounting holes and hardware included. Power supply connections must be made inside a junction box (not included).

### Finish

Satin nickel metal trim bands.

### Diffuser

0.080" thick vacuum formed smooth white acrylic.

### Electrical

Input 120 VAC / 60 Hz.

Compatible with TRIAC and ELV dimmers.

### LED

Integrated LED modules capable of producing:

12W = 967 delivered lumens

27W = 1810 delivered lumens

35W = 2947 delivered lumens

12" & 14" Adjustable Choice 2700K, 3000K, 3500K, 4000K, 5000K (CCT)

24" Adjustable Choice 3000K, 3500K, 4000K (CCT)

### Certification

All fixtures are cETLus listed for indoor damp locations.

Title 24/JA8 Compliant

Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.

### Options for 14" and 24" ONLY

Emergency Battery Back-Up (add -BB to the end of the model number)

### Warranty



Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

### Products ordered with battery back-up:

Fixture must be installed and the battery energized within six months of the purchase date to remain eligible for warranty coverage. Failure to comply may result in complete battery discharge, rendering it irrecoverable and thereby voiding the warranty.

Specifications and dimensions subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

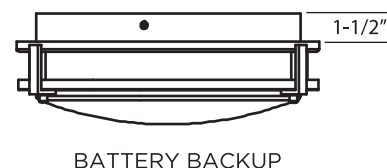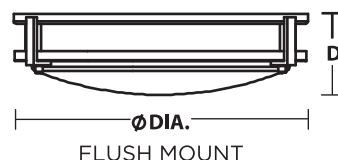

## Ordering Information:

Satin Nickel	LED	Delivered Lumens	Adjustable CCT	DIA.	D
CAF121200L5AJD1	12W	967	2700K/3000K/3500K/4000K/5000K	12"	3-1/2"
CAF142400L5AJD1	27W	1810	2700K/3000K/3500K/4000K/5000K	14"	4"
CAF243100LAJD1	35W	2947	3000K/3500K/4000K	24"	5"