



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Charlotte LED Sconce CHS Series

Features

Contemporary wall mount sconce with perforated metal ends.
Fixture mounts to standard junction box (not included).

Construction

Back plate is die-formed of 22-gauge steel. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

All cast metal components are finished in satin nickel or oil-rubbed bronze.

Diffuser

White linen shade.

Electrical

This unit is direct wired with a constant current LED driver rated for 120-277V. Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers. TRIAC and ELV dimming only at 120VAC.

Lamping

7W = 700 source lumens
3000K (CCT). Rated for 50,000 Hrs., 90 CRI.


Certification

All fixtures are cETLus listed for damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

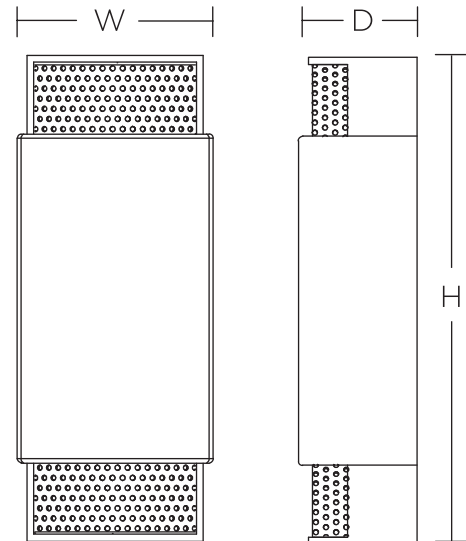

Ordering Information:

Satin Nickel	Oil-Rubbed Bronze	Source		CCT	H	W	D
		LED	Lumens				
CHS614700L27UDSN	CHS614700L27UDRB	7W	700	2700K	13-3/4	5-1/2"	3-3/8"
CHS614700L30UDSN	CHS614700L30UDRB	7W	700	3000K	13-3/4	5-1/2"	3-3/8"