



Cortez LED Sconce CZS Series

Features

This contemporary clean line design provides a dramatic look with the metal plate and arms details and an outer sheer shade and a linen inner shade.

Construction

The frame assembly is mounted to a 20-gauge stamped steel back plate. It features a unitized construction for easy lamp replacement. Power supply connections must be made inside a junction box (not included).

Finish

Fabricated stamped metal components are plated in one of the following finishes:

- Satin Nickel (SN) • Oakley Bronze (KB)

Diffuser

A shade-in-shade design with a sheer fabric outer shade. Available in a white (WHWH) or bronze (BZWH) outer shade with a white linen inner shade.

Electrical

This unit is direct wired with a constant current LED driver rated for 120-277V. Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers. TRIAC and ELV dimming only at 120VAC.

Lamping

25" - 1400 source lumens
31" - 2100 source lumens
2700K or 3000K (CCT)
50,000 hr. LED life - 90 CRI

Certification


All fixtures are cETLus listed for damp locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

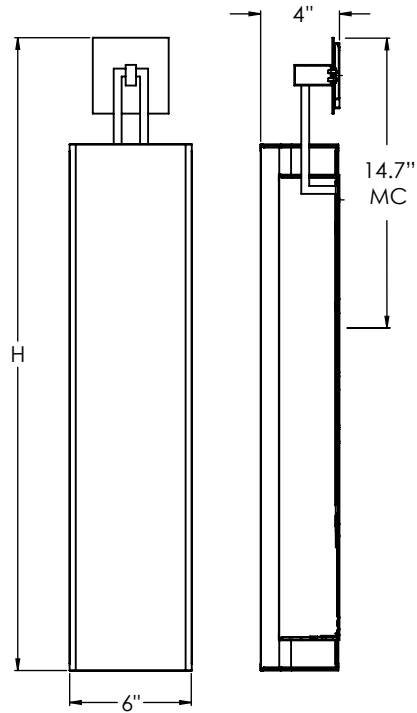

Ordering Information:

25" H x 6" W x 4" D
31-1/4" H x 6" W x 4" D

Series	Size (Inches)		Source Lumens	LED	CCT	Driver	Finish	Shade-In-Shade
	W	H						
CZS	6	22 (25")	= 1400	L	27 2700K	UD Voltage (120-277V Universal Dimming)	KB Oakley Bronze SN Satin Nickel	WHWH White/White BZWH Bronze/White
	6	31	= 2100		30 3000K			

Example: CZS6221400L27UDKB-BZWH