



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

DAX LED Vanity DAXV Series

Features

Simple style elegant geometry. Diffuser is retained with threads for a tight clean appearance against the housing. This product is ideal for corridor and vanity applications. Fixture can be mounted horizontally or vertically to a standard junction box (not included) on a wall.

Construction

The frosted white acrylic diffuser is mounted into a decorative steel cylinder. Wall plate is stamped steel and held in place with 2 screws located within the floating recess. Power supply connections must be made inside a junction box (not included).

Finish

Black, Satin Brass or Satin Nickel backplate and accents.

Diffuser

Diffuser is .316" thick frosted white acrylic diffuser.

Electrical

Input 120 VAC 60 Hz.
Compatible with residential TRIAC and ELV dimmers.

LED

Integrated LED modules capable of producing:
30W = 3300 source lumens, 2200 delivered lumens
35W = 3800 source lumens, 2900 delivered lumens
3000K (CCT). Rated for 50,000 hours, 90 CRI.



Certification

All fixtures are cULus listed for indoor damp locations.
ADA Compliant.
Title 24/JA8 Compliant.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

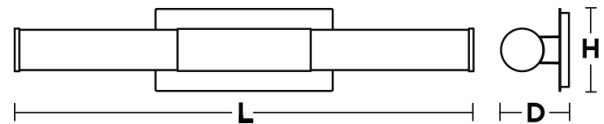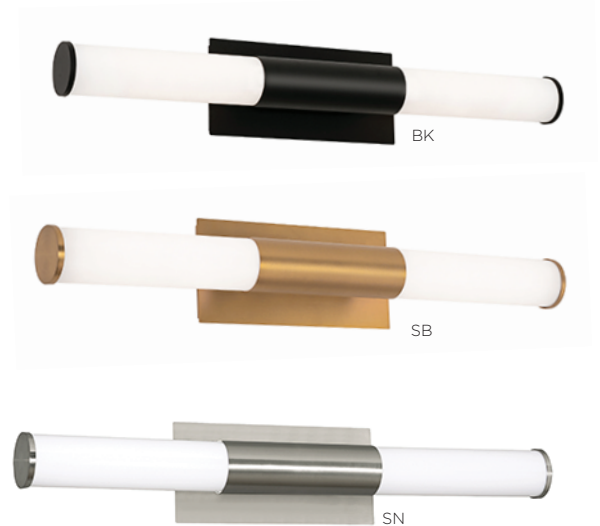

Ordering Information:

Black	Satin Brass	Satin Nickel	LED	Source Lumens	Delivered Lumens	CCT	L	H	D
DAXV2705L30D1BK	DAXV2705L30D1SB	DAXV2705L30D1SN	30W	3300	2200	3000K	27-1/4"	4-7/8"	4"
DAXV3605L30D1BK	DAXV3605L30D1SB	DAXV3605L30D1SN	35W	3800	2900	3000K	36-1/4"	4-7/8"	4"