AFX®

Edge Round Large LED Surface Mount Disc Light
EGRF Series

3in1 CCT   **ENERGY STAR**   **TITLE 24 JA8 COMPLIANT**

Features
This ultra low profile design provides a dramatic look and features an edge-lit light panel construction. Products can be used in various applications including corridors, closets, bath, showers, hallway, kitchen and anywhere general lighting is needed.
Indoor use only - Wall or ceiling mount.
Outdoor use only - Covered ceiling mount.

Construction
Edge-lit technology housing is injection molded with steel backplate.
Twist and lock bracket.
Mounts to standard junction box (not included).
Power supply connections must be made inside junction box.

Finish
White or Black finish.

Diffuser
White acrylic diffuser.
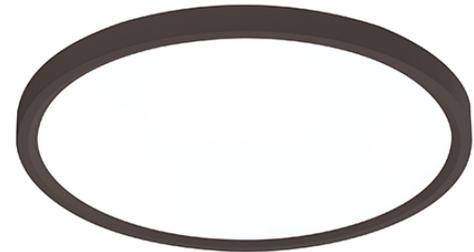
Electrical
D1 Driver
Input 120 VAC, 60 Hz. The LED driver is dimmable with a
2-wire (TRIAC) or electronic low voltage (ELV) dimmer switch.

D2 Driver
Input 120-277 VAC 60 Hz. LED driver is dimmable with 0-10V dimmer.

Lamping
Intergrated LED modules capable of producing:
25W = 2525 delivered lumens
40W = 3375 delivered lumens
Adjustable Choice 3000K, 4000K, 5000K (CCT). Preset at 3000K.
Rated for 50,000 Hrs. 90 CRI.
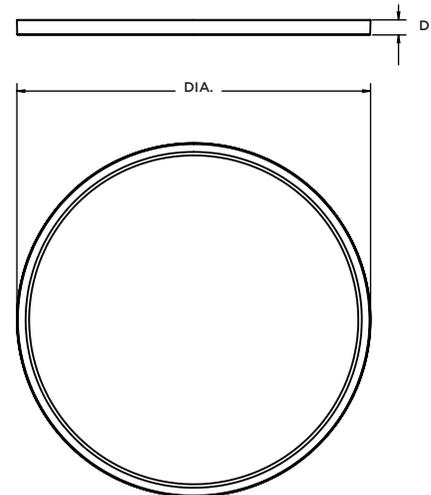
Certification
cETLus listed
ENERGY STAR® Qualified
Title 24/JA8 Compliant
Wet location rated for indoor use. Outdoor wet location rated for covered ceiling mount applications ONLY (not recommended for any other outdoor use).
Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.

Warranty
Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions subject to change without notice.

Ordering Information:

White	Black	LED	Delivered Lumens	Adjustable CCT	DIA.	D
EGRF1625LAJD1WH	EGRF1625LAJD1BK	25W	2525	3000K/4000K/5000K	15-5/8"	15/16"
EGRF1625LAJD2WH	EGRF1625LAJD2BK	25W	2525	3000K/4000K/5000K	15-5/8"	15/16"
EGRF2440LAJD1WH	EGRF2440LAJD1BK	40W	3375	3000K/4000K/5000K	23-5/8"	1"
EGRF2440LAJD2WH	EGRF2440LAJD2BK	40W	3375	3000K/4000K/5000K	23-5/8"	1"