



Fulton LED Outdoor Sconce FTNW Series

Features

Modern design. Provides lighting in residential, commercial, and hospitality applications. Fixture mounts to standard junction box (not included). Vertical or horizontal mounting. Meets ADA requirements. Fixture mounts to standard junction box (not included).

Emergency Back-Up (Optional '-BB')

- 90 minute run-time
- 9.6VDC LiFePO4 battery
- 8 watts

Construction

Aluminum housing. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Black powder coated finish.

Diffuser

White acrylic diffuser.

Electrical

Input 120-277 VAC 60 HZ.
0-10V dimming (120-277V), TRIAC (120V).
Minimum starting temp -4° F / -20°C

Lamping

Fixture includes a LED modules capable of producing:
20W = 1300 delivered lumens
25W = 1600 delivered lumens
30W = 1900 delivered lumens
40W = 2600 delivered lumens
Adjustable 2700K, 3000K, 3500K, 4000K, 5000K (CCT).
Rated for 50,000 Hrs. 90 CRI.

Certification


All fixtures are cETLus listed for wet locations.
ADA Compliant
Title 24/AJ8 Compliant

Warranty

5 Year Limited Warranty:
Restrictions apply based on location.

**Specifications and dimensions
subject to change without notice.**

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

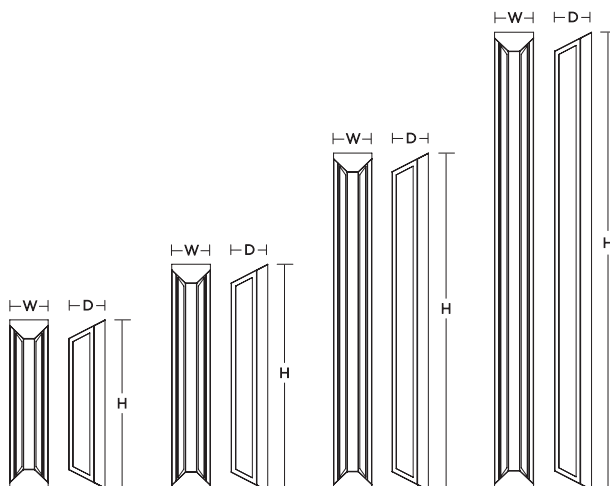

Ordering Information:

Black	LED	Delivered Lumens	Adjustable CCT	H	W	D
FTNW0418LAJDBK	20W	1300	2700K/3000K/3500K/4000K/5000K	18"	4-1/8"	3-7/8"
FTNW0418LAJDBK-BB	20W	1300	2700K/3000K/3500K/4000K/5000K	18"	4-1/8"	3-7/8"
FTNW0424LAJDBK	25W	1600	2700K/3000K/3500K/4000K/5000K	24"	4-1/8"	3-7/8"
FTNW0424LAJDBK-BB	25W	1600	2700K/3000K/3500K/4000K/5000K	24"	4-1/8"	3-7/8"
FTNW0436LAJDBK	30W	1900	2700K/3000K/3500K/4000K/5000K	36"	4-1/8"	3-7/8"
FTNW0436LAJDBK-BB	30W	1900	2700K/3000K/3500K/4000K/5000K	36"	4-1/8"	3-7/8"
FTNW0448LAJDBK	40W	2600	2700K/3000K/3500K/4000K/5000K	48"	4-1/8"	3-7/8"
FTNW0448LAJDBK-BB	40W	2600	2700K/3000K/3500K/4000K/5000K	48"	4-1/8"	3-7/8"