



Fulton LED Outdoor Sconce FTNW Series

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Features

Modern design. Provides lighting in residential, commercial, and hospitality applications. Fixture mounts to standard junction box (not included). Vertical or horizontal mounting. Meets ADA requirements. Fixture mounts to standard junction box (not included).



Emergency Back-Up (Optional 'BB')

- 90 minute run-time
- 9.6VDC LiFePO4 battery
- 8 watts

Construction

Aluminum housing. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Diffuser

Black powder coated finish.

Finish

White acrylic.

Electrical

Input 120-277 VAC 60 HZ.
0-10V dimming (120-277V), TRIAC (120V).
Minimum starting temp -4° F / -20°C

Lamping
Fixture includes a LED modules capable of producing:
20W = 1300 delivered lumens
25W = 1600 delivered lumens
30W = 1900 delivered lumens
40W = 2600 delivered lumens
Adjustable 2700K, 3000K, 3500K, 4000K, 5000K (CCT).
Rated for 50,000 Hrs. 90 CRI.



Certification


All fixtures are cETLus listed for wet locations.
ADA Compliant
Title 24/AJ8 Compliant

Warranty

5 Year Limited Warranty:

Restrictions apply based on location.

**Specifications and dimensions
subject to change without notice.**

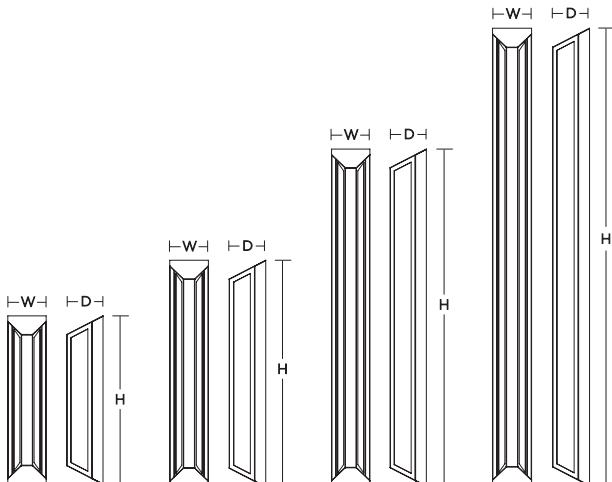

Ordering Information:

Black	LED	Delivered Lumens	Adjustable CCT
FTNW0418LAJUDBK	20W	1300	2700K/3000K/3500K/4000K/5000K
FTNW0418LAJUDBK-BB	20W	1300	2700K/3000K/3500K/4000K/5000K
FTNW0424LAJUDBK	25W	1600	2700K/3000K/3500K/4000K/5000K
FTNW0424LAJUDBK-BB	25W	1600	2700K/3000K/3500K/4000K/5000K
FTNW0436LAJUDBK	30W	1900	2700K/3000K/3500K/4000K/5000K
FTNW0436LAJUDBK-BB	30W	1900	2700K/3000K/3500K/4000K/5000K
FTNW0448LAJUDBK	40W	2600	2700K/3000K/3500K/4000K/5000K
FTNW0448LAJUDBK-BB	40W	2600	2700K/3000K/3500K/4000K/5000K

H	W	D
18"	4-1/8"	3-7/8"
18"	4-1/8"	3-7/8"
24"	4-1/8"	3-7/8"
24"	4-1/8"	3-7/8"
36"	4-1/8"	3-7/8"
36"	4-1/8"	3-7/8"
48"	4-1/8"	3-7/8"
48"	4-1/8"	3-7/8"