



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Glo LED Sconce/Vanity GLOS/GLOV Series

Features

Sleek contemporary styling with die-cast circular metal backplate. Vertical or horizontal mounting. Ideal use in hallways, entrances or anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).

Construction

Back plate is die-formed of 22-gauge steel. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Black, Satin Brass or Satin Nickel finish.

Diffuser

White acrylic diffuser.

Electrical

Input 120 VAC 60 Hz.

Compatible with residential TRIAC and ELV dimmers.

LED

Integrated LED modules capable of producing:

12W = 600 delivered lumens

15W = 1000 delivered lumens

3000K (CCT) rated for 50,000 hrs., 90 CRI.

Certification

All fixtures are cETLus listed for indoor damp locations.

ADA



Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions

subject to change without notice.

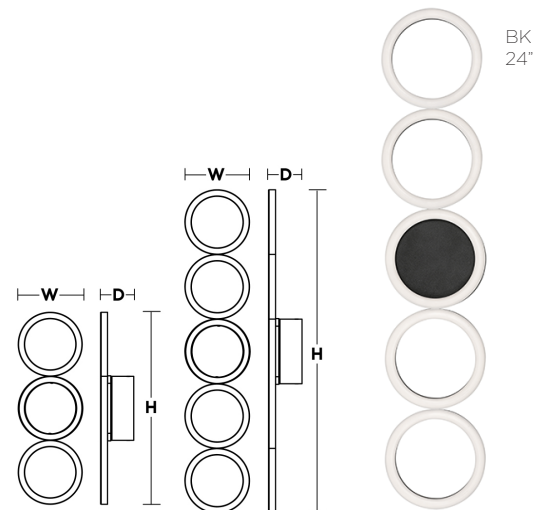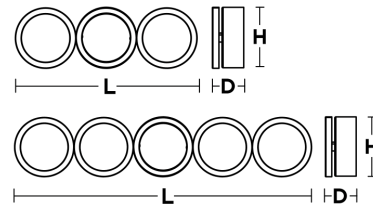

Ordering Information:

Black	Satin Brass	Satin Nickel	LED	Delivered Lumens	CCT	H/L	W	D
GLOS0514L30D1BK	GLOS0514L30D1SB	GLOS0514L30D1SN	12W	600	3000K	14-1/4"	4-3/4"	2-1/2"
GLOV2405L30D1BK	GLOV2405L30D1SB	GLOV2405L30D1SN	15W	1000	3000K	24"	4-3/4"	2-1/2"