



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

## Gallery LED Sconce GLYS Series



### Features

Modern design featuring a metal backplate and decorative band. Clear glass diffuser with printed pattern. Ideal use in hallways, entrances or anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Meets ADA requirements. Fixture mounts to standard junction box (not included).

### Construction

Die-cast metal diffuser bracket, stamped metal backplate. Power supply connections must be made inside a junction box (not included).

### Finish

Satin Brass or Satin Nickel finish.

### Diffuser

Clear glass diffuser with printed pattern.

### Electrical

Input 120 VAC / 60 Hz.  
Compatible with residential TRIAC and ELV dimming.

### LED

Fixture includes an LED module capable of producing:  
15W = 1200 source lumens, 426 delivered lumens  
3000K (CCT). Rated for 50,000 Hrs., 90 CRI.

### Certification

All fixtures are ETL listed for indoor damp locations.  
ADA

### Warranty


Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

**Specifications and dimensions  
subject to change without notice.**



Satin Brass

Satin Nickel

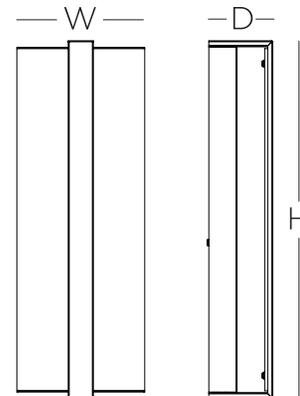

## Ordering Information:

Satin Brass	Satin Nickel	LED	Source Lumens	Delivered Lumens	CCT	H	W	D
GLYS140512L30D1SB	GLYS140512L30D1SN	15W	1200	426	3000K	14"	5"	2-1/2"