



Gallery LED Sconce GLYS Series

Features

Modern design featuring a metal backplate and decorative band. Clear glass diffuser with printed pattern. Ideal use in hallways, entrances or anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Meets ADA requirements. Fixture mounts to standard junction box (not included).

Construction

Die-cast metal diffuser bracket, stamped metal backplate. Power supply connections must be made inside a junction box (not included).

Finish

Black, Light Antique Brass or Satin Nickel finish.

Diffuser

Clear glass diffuser with printed pattern.

Electrical

Input 120-277 VAC 60 HZ.

Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers. TRIAC and ELV dimming only at 120 VAC.

LED

Fixture includes an LED module capable of producing:

15W = 1200 source lumens, 426 delivered lumens

Selectable 2700K, 3000K, 3500K, 4000K, 5000K (CCT).

Rated for 50,000 Hrs., 90 CRI.

Certification

All fixtures are ETL listed for indoor damp locations.

Title 24/JA8 Compliant



ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		Fixture Type
CATALOG NUMBER		

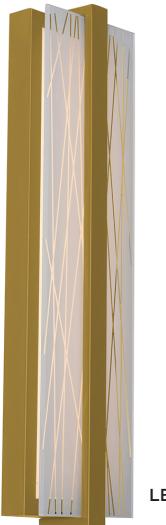

Ordering Information:

Black GLYS0514LAJUDBK GLYS0520LAJUDBK	Light Antique Brass GLYS0514LAJUDLB GLYS0520LAJUDLB	Satin Nickel GLYS0514LAJUDSN GLYS0520LAJUDSN	LED 14W 20W	Delivered Lumens 426 640	Adjustable CCT 2700K/3000K/3500K/4000K/5000K 2700K/3000K/3500K/4000K/5000K	H 14" 20"	W 5" 5"	D 2-1/2" 2-1/2"
---	---	--	-------------------	-----------------------------------	--	-----------------	---------------	-----------------------