



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Haven LED Flush Mount HVNF Series

Features

Decorative flush mount with a white acrylic diffuser and metal geometric pattern.
Ideal use in kitchens, hallways, and anywhere general lighting is needed.
Provides lighting in residential, commercial and hospitality applications.
Fixture mounts to standard junction box (not included).



Construction

The canopy is 22-gauge stamped steel. Standard mounting holes and hardware included. Power supply connections must be made inside a junction box (not included).

Finish

Satin Nickel, Black or Satin Brass*.

Diffuser

White acrylic diffuser.

Electrical

Input 120-277 VAC 60 HZ.
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.
TRIAC and ELV dimming only at 120VAC.

LED

Integrated LED modules capable of producing:
17W = 1400 source lumens, 946 delivered lumens
29W = 2400 source lumens, 1600 delivered lumens
40W = 3200 source lumens, 1919 delivered lumens
Adjustable Choice 3000K, 3500K, 4000K (CCT).
Rated for 50,000 Hrs., 90 CRI.

Certification

All fixtures are cETLus listed for indoor damp locations.

Options for 17" and 21" ONLY

Emergency Battery Back-Up (add -BB to the end of the model number)
Motion Sensor (add -MS to the end of the model number)
Emergency Battery Back-Up with Motion Sensor (add -MSBB to the end of the model number)



Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.


Products ordered with battery back-up:

Fixture must be installed and the battery energized within six months of the purchase date to remain eligible for warranty coverage. Failure to comply may result in complete battery discharge, rendering it irrecoverable and thereby voiding the warranty.

Specifications and dimensions subject to change without notice.

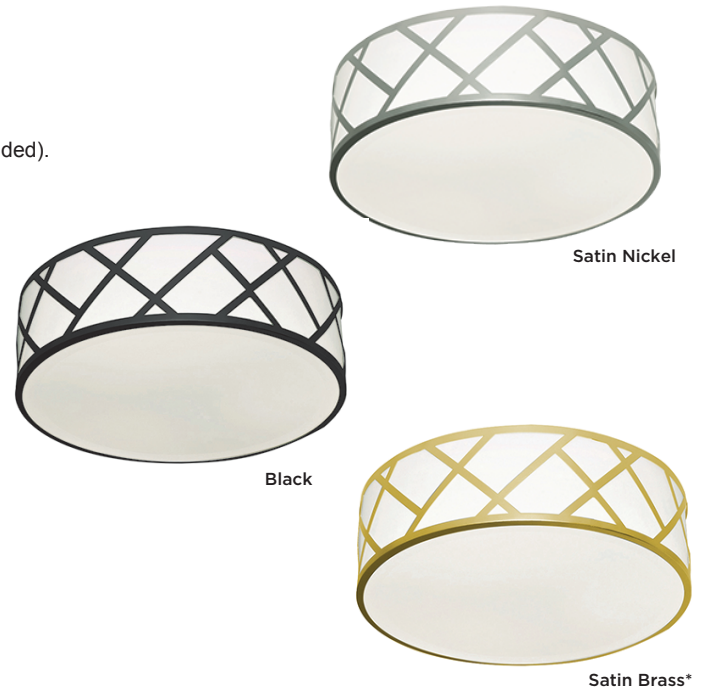

FLUSH MOUNT



BATTERY BACKUP

Ordering Information:

Satin Nickel	Black	Satin Brass*	LED	Source Lumens	Delivered Lumens	Adjustable CCT	DIA.	D
HVNF13LAJUDSN	HVNF13LAJUDBK	HVNF13LAJUDSB	17W	1400	946	3000K/3500K/4000K	12-5/8"	5-3/4"
HVNF17LAJUDSN	HVNF17LAJUDBK	HVNF17LAJUDSB	29W	2400	1600	3000K/3500K/4000K	16-3/4"	5-3/4"
HVNF21LAJUDSN	HVNF21LAJUDBK	HVNF21LAJUDSB	40W	3200	1919	3000K/3500K/4000K	21"	5-3/4"

*Special order - consult factory for MOQ and lead time.