



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



Indra LED Vanity IDRV Series

Features

Simple style elegant geometry. Horizontal or vertical mounting.
Provides lighting in residential, commercial and hospitality applications.
This fixture mounts to a standard junction box (not included).

Construction

Back plate is die-formed of 22-gauge steel. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Black, Satin Brass or Satin Nickel finish.

Diffuser

White acrylic diffuser.

Electrical

Input 120-277 VAC 60 HZ.
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.
TRIAC and ELV dimming only at 120 VAC.

LED

Integrated LED modules capable of producing:
22W = 1625 delivered lumens
30W = 2050 delivered lumens
Adjustable Choice 2700K, 3000K, 3500K, 4000K, 5000K (CCT).
Rated for 50,000 Hrs., 90 CRI.


Certification

All fixtures are cULus listed for indoor damp locations.
ADA Compliant
Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

**Specifications and dimensions
subject to change without notice.**

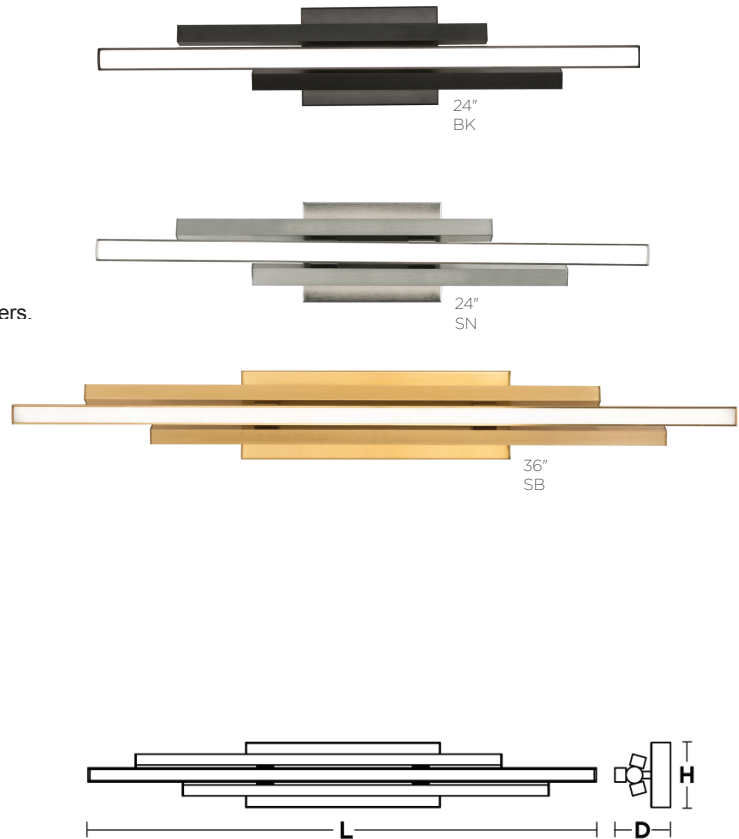

Ordering Information:

Black	Satin Brass	Satin Nickel	LED	Delivered Lumens	Adjustable CCT	L	H	D
IDRV2405LAJUBK	IDRV2405LAJUDSB	IDRV2405LAJUDSN	22W	1625	2700K/3000K/3500K/4000K/5000K	24"	4-1/2"	4"
IDRV3605LAJUBK	IDRV3605LAJUDSB	IDRV3605LAJUDSN	30W	2050	2700K/3000K/3500K/4000K/5000K	36"	4-1/2"	4"