



| | | |
|----------------|--|--------------|
| LOCATION | | DATE |
| PREPARED BY | | QUANTITY |
| COMMENTS | | FIXTURE TYPE |
| CATALOG NUMBER | | |

LED Striplight LSL Series

Features

This clean appearance striplight can be mounted to a ceiling or wall and provides wide distribution of light with a white diffuser. 5 in 1 CCT. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not include).

Bi-Level Motion Sensor (Optional '-MS')

- Built-in daylight sensor
- Detection area, time delay and daylight threshold can be precisely set via DIP switch
- Wide detection area, range up to 50 ft. (16 m) max

Emergency Back-Up (Optional 'BB')

- 90 minute run-time
- 9.6VDC LiFePO4 battery
- 8 watts

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

White acrylic diffuser.

Electrical (D2)

Input 120-277 VAC/60 Hz.

Fixture includes integrated motion sensor with built-in 3-step dimming function. Not compatible with dimming circuits.

LED

Integrated LED modules capable of producing:

40W = 4100 delivered lumens

2700K/3000K/3500K/4000K/5000K (CCT).

Rated for 50,000 hrs., 90 CRI.

Certification

All fixtures are cETLus listed for indoor damp locations.


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.


Products ordered with battery back-up:

Fixture must be installed and the battery energized within six months of the purchase date to remain eligible for warranty coverage. Failure to comply may result in complete battery discharge, rendering it irrecoverable and thereby voiding the warranty.


Specifications and dimensions subject to change without notice.

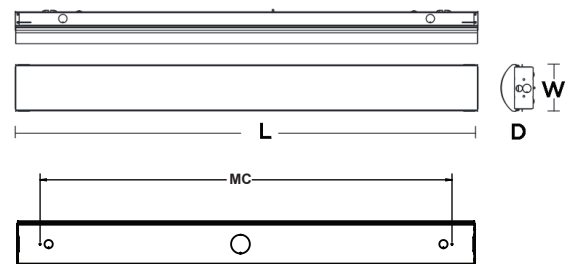

When sufficient light, the fixtures will not switch on.

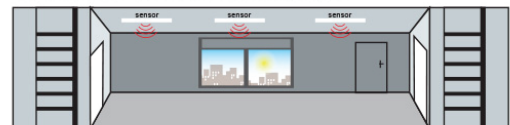

When insufficient light, the fixtures turn on at desired dimming level (10% - 50%).

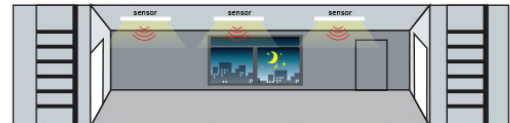

When motion is detected, fixtures switch to full light output.



After standby period of no motion, fixtures return to desired dimming level (10%-50%).



| Non-Dimming | LED | Delivered Lumens | Adjustable CCT | L | W | D |
|-------------------|-----|------------------|-------------------------------|-----|--------|--------|
| LSL4805LAJD2WH | 40W | 4100 | 2700K/3000K/3500K/4000K/5000K | 48" | 4-7/8" | 3-1/2" |
| LSL4805LAJD2WH-BB | 40W | 4100 | 2700K/3000K/3500K/4000K/5000K | 48" | 4-7/8" | 3-1/2" |

| With Dimming Motion Sensor | LED | Delivered Lumens | Adjustable CCT | L | W | D |
|----------------------------|-----|------------------|-------------------------------|-----|--------|--------|
| LSL4805LAJD2WH-MS | 40W | 4100 | 2700K/3000K/3500K/4000K/5000K | 48" | 4-7/8" | 3-1/2" |
| LSL4805LAJD2WH-MSBB | 40W | 4100 | 2700K/3000K/3500K/4000K/5000K | 48" | 4-7/8" | 3-1/2" |