



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

## Low Profile/Narrow Wrap LW Series

### Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light with a clear prismatic lens or with a translucent smooth white diffuser. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

### Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

### Finish

Housing is finished in lighting grade white baked gloss enamel paint. Can be ordered with post-painted white metal end-plates. Add X199 to the end of the part number when ordering. (Ex. LW217R8X199)

### Diffuser

Acrylic diffuser is .060" thick prismatic diamond pattern 12 on the face with linear prisms on the sides, or can be ordered in smooth white acrylic plastic. Diffuser rests in position on the continuous housing flange, it is removed by a lift and shift motion.

### Electrical

This unit can be ordered in the following ballast options:

1. UL Listed, High Power Factor Instant-Start Electronic Ballast 120-277V 50/60Hz AC (MV suffix).
2. UL Listed, Normal Power Factor Residential Grade Ballast 120V/60Hz (R8 suffix).

### Lamping

The following lamping options are available, lamps not included.  
 • (2) F17T8 • (2) F32T8 • (4) F32T8  
 Compatible with T8 Fluorescent or Type A - LED Tubes

### Certification


cULus listed for damp locations.

### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 2 years from date of purchase.

**Specifications and dimensions  
subject to change without notice.**

**Limited Quantities Remain.  
Consult Factory.**

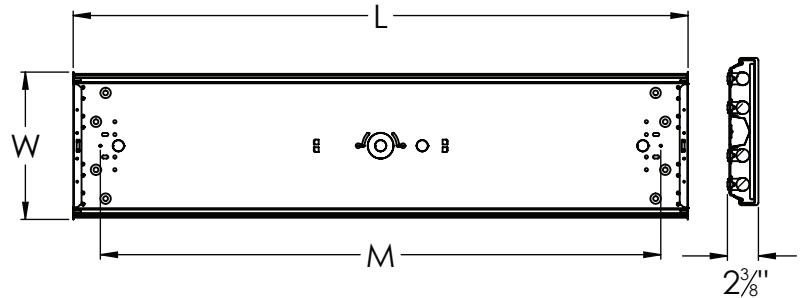

Lamp	L	W	D	M
2 - F17T8	24"	7"	2-3/8"	19-3/4"
2 - F32T8	48"	7"	2-3/8"	43-3/4"
4 - F32T8	48"	11-1/2"	2-3/8"	43-3/4"

## Ordering Information:

### Prismatic 120V

120-277V	Qty.	Lamp	L	W	H
LW217R8	2	F17T8	24"	7"	2-3/8"
LW232R8	2	F32T8	48"	7"	2-3/8"
LW432R8	4	F32T8	48"	11-1/2"	2-3/8"

### White 120V

120-277V	Qty.	Lamp	L	W	H
LW217WAR8	2	F17T8	24"	7"	2-3/8"
LW232WAR8	2	F32T8	48"	7"	2-3/8"
LW432WAR8	4	F32T8	48"	11-1/2"	2-3/8"