



Noble Pro LED Line Voltage Task Lighting NLLP2 Series

Features

The NLLP2 Series is ideal for undercabinet lighting in kitchens, study area and displays with its low profile design. The housing is available in 5 different lengths, ranging from 9" to 40" to handle most application requirements. Color options include white, oil-rubbed bronze and a brushed aluminum finish to accommodate most decors. The NLLP2 Series includes an array of LEDs, and is linkable up to 200 watts. In addition the units can be direct wired, and attached to the cabinet with 2 captive mounting screws, which provide for a smoother installation. Multiple knockouts on the top and the back which offers maximum wiring flexibility.

The following accessories are included with each fixture:

- BX/NM cable connector • direct connector
- Slide switch lock (use to isolate color switch to a specific CCT)

Hardwire Box (ordered separately) recommended for use (when direct wiring the 9" units
Occupancy sensor (order separately) available for active motion detection)

Construction

Fixture housing is made from extruded aluminum.

Finish

All exposed metal parts are post painted and available in the following finishes:

- White Gloss Enamel (WH) • Oil-Rubbed Bronze (RB)

Diffuser

White polycarbonate

Electrical

This unit is wired for 120 Volt operation. This product also provides a user selectable switch which will allow you to select 1 of 3 color levels which are 2700K, 3000K & 4000K CCT respectively. The fixture features a Triac dimmable driver and is dimmable with most standard 2 wire (Triac) wall dimmers or an electronic low voltage dimmer switch (sold separately). High/ low switch included.

Lamping

LED Lamping, type SMT array, 2 (Non replaceable arrays are used to create 2700K, 3000K or 4000K color temps), Rated to 50,000 hrs. 90 CRI.

Certification

Fixtures are listed cETLus for damp location and carry a cETLus rating for undercabinet/convertible/linkable mounting.

ENERGY STAR® qualified

Title 24/JA8 Compliant

Warranty

Limited warranty. This fixture guaranteed to be free from defects in materials and workmanship for a period of 5 years from date of purchase.



Specifications and dimensions subject to change without notice.

Ordering Information:

Size	White	Oil-Rubbed Bronze	Type	Lumens				LPW	L	W	D
				2.7K	3.0K	4.0K					
9 in.	NLLP2-09WH	NLLP2-09RB	4.6W SMT-Array	259	290	384	63	9"	3-3/4"	1"	
14 in.	NLLP2-14WH	NLLP2-14RB	6.7W SMT-Array	384	437	442	65	14"	3-3/4"	1"	
22 in.	NLLP2-22WH	NLLP2-22RB	10.7W SMT-Array	656	746	755	69	22"	3-3/4"	1"	
32 in.	NLLP2-32WH	NLLP2-32RB	14.4W SMT-Array	927	1022	1023	70	32"	3-3/4"	1"	
40 in.	NLLP2-40WH	NLLP2-40RB	18W SMT-Array	1170	1302	1310	72	40"	3-3/4"	1"	

LPW based on 3000K color temperature

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

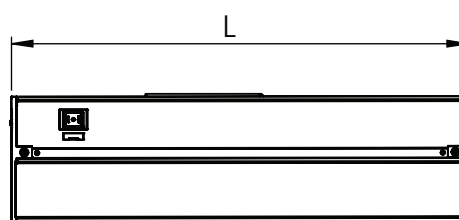

COMPATIBLE WALL DIMMERS

Brand	Model #
Cooper	6013W
Leviton®	6633, 6681, 6621-WWP, 6631-WWP, DSE06-10Z
Lutron®	TG-600P, TG-603P, AY600P, MACL153MH, SELV-300P
Legrand®	T600WV, WS700TCCC6V
Pass & Seymour	

ACCESSORIES (ORDER SEPARATELY)

XLCC12WH	12" Interconnect cord - White
XLCC12BL	12" Interconnect cod - Black
XLCC24WH	24" Interconnect cord - White
XLCC24BL	24" Interconnect cord - Black
XLCC36WH	36" Interconnect cord - White
XLCC36BL	36" Interconnect cord - Black
XLCC48WH	48" Interconnect cord - White
XLCC48BL	48" Interconnect cord - Black
XLCC72WH	72" Interconnect cord - White
XLCC72BL	72" Interconnect cord - Black
XLCP60WH	60" Cord & Plug - White
XLCP60BL	60" Cord & Plug - Black
XLHBWH	Hardwire Box - White
XLHBL	Hardwire Box - Black
XLC-Clips	Clear Cord Clip with Screws (4 pieces)
LCX-OCC	Occupancy sensor

