



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

## Odell LED Outdoor Sconce ODEW Series



### Features

Pivoting head for wall or ceiling installs.  
Ideal use for general lighting in indoor or outdoor residential, commercial, and hospitality applications. Fixture can be mounted to a standard junction box (not included) on a wall or ceiling.

### Construction

Die-cast aluminum housing and painted in weather resistant powder coating. Power supply connections must be made inside a junction box (not included).

### Finish

Black, Textured Grey or Oil-Rubbed Bronze\* finish.

### Diffuser

White polycarbonate diffuser.

### Electrical

Input 120 VAC / 60Hz.  
Minimum starting temp -4° F/-20° C  
Integrated photocell for dusk to dawn operation.

### LED

Integrated LED modules capable of producing:  
12W = 1000 delivered lumens  
Adjustable Choice 3000K, 4000K, 5000K (CCT).  
Rated for 50,000 Hrs. 80 CRI.



### Certification

All fixtures are cETLus listed for outdoor wet locations.  
Title 24/JA8 Compliant  
Ideal for coastal applications (IP65)

### Warranty

5 Year Limited Warranty:  
**Restrictions apply based on location.**

**Specifications and dimensions  
subject to change without notice.**

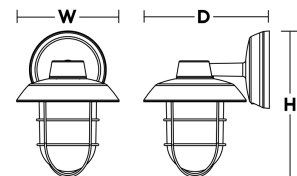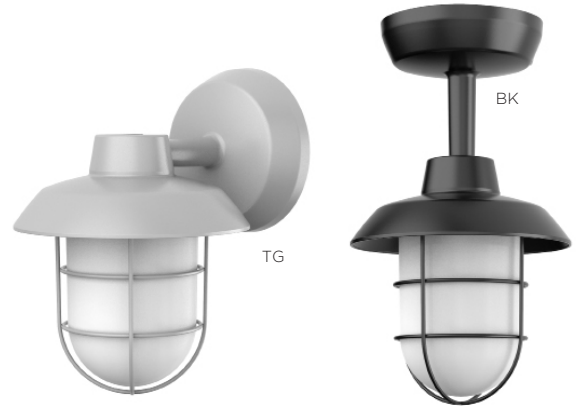

## Ordering Information:

Black	Textured Grey	Oil-Rubbed Bronze	LED Lumens	Delivered Adjustable CCT	H	W	D
ODEW0709LAJENBK	ODEW0709LAJENTG	ODEW0709LAJENBZ*	12W 1000	3000K/4000K/5000K	9"	6-3/4"	8"

\*Minimum order quantity required, consult factory.