



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Octavia LED Flush Mount OTVF Series

Features

Contemporary shallow flush mount with metal trim band. Ideal use in kitchens, hallways, and anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).



Construction

Housing is die formed aluminum band with bowed white diffuser. Back pan is made from 22-gauge stamped steel and painted in lighting grade white. Standard mounting holes and hardware included. Power supply connections must be made inside a junction box (not included).

Finish

Brushed Aluminum, Satin Brass or Black.

Diffuser

.100" thick white acrylic bottom diffuser.

Electrical

Input 120VAC / 60 Hz.

Compatible with Triac or ELV dimmers.

LED

Integrated LED modules capable of producing:
 22W = 1800 source lumens, 1020 delivered lumens
 33W = 2500 source lumens, 1610 delivered lumens
 46W = 3200 source lumens, 2150 delivered lumens
 Adjustable Choice 3000K, 3500K, 4000K (CCT).
 Rated for 50,000 Hrs., 90 CRI.

Certification

All fixtures are cETLus listed for indoor damp locations.

Title 24/JA8 compliant

Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.

Options for 14" and 19" ONLY

Emergency Battery Back-Up (add -BB to the end of the model number)


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Products ordered with battery back-up:

Fixture must be installed and the battery energized within six months of the purchase date to remain eligible for warranty coverage. Failure to comply may result in complete battery discharge, rendering it irrecoverable and thereby voiding the warranty.

Specifications and dimensions subject to change without notice.

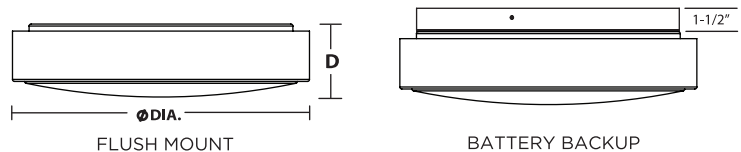

Ordering Information:

Brushed Aluminum	Black	Satin Brass	LED	Source Lumens	Delivered Lumens	Adjustable CCT	DIA.	D
OTVF1218LAJD1BA	OTVF1218LAJD1BK	OTVF1218LAJD1SB	22W	1800	1020	3000K/3500K/4000K	12"	3"
OTVF1425LAJD1BA	OTVF1425LAJD1BK	OTVF1425LAJD1SB	33W	2500	1610	3000K/3500K/4000K	14"	3"
OTVF1932LAJD1BA	OTVF1932LAJD1BK	OTVF1932LAJD1SB	46W	3200	2150	3000K/3500K/4000K	19"	3"