



Pacific LED Vanity PCV Series

Features

Contemporary style vanity with endcaps and smooth white diffuser provide a simple and clean appearance. Fixture can be mounted horizontally or vertically to a standard junction box (not included).

Construction

The wiring channel is formed from 22-gauge steel and is provided with standard mounting holes and wiring access.

Finish

Housing is finished in lighting grade baked gloss white enamel paint. Satin Nickel or Oil-Rubbed Bronze* end caps.

Diffuser

Diffuser assembly consists of metal endcaps with a plated satin nickel finish. Diffuser is .07" thick smooth white acrylic. Diffuser ends attach with thumb screws.

Electrical

Input 120VAC / 60Hz
Not compatible with dimmers.

LED

Integrated LED modules capable of producing:
17W = 1800 source lumens, 1392 delivered lumens
25W = 2700 source lumens, 2086 delivered lumens
34W = 3600 source lumens, 2982 delivered lumens
3000K (CCT), 80 CRI. Rated for 50,000 hrs. LED life

Certification

All fixtures are cETLus listed for damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		


ADA



24"



36"

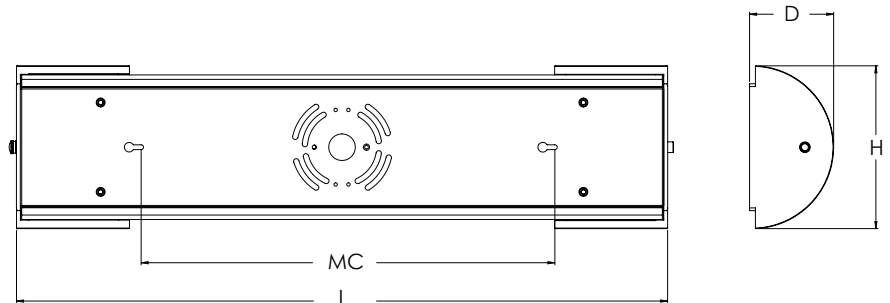

Ordering Information:

Satin Nickel	Oil-Rubbedn Bronze*	LED	Source Lumens	Delivered Lumens	CCT	L	H	D	MC
PCV241700L30SN	PCV241700L30BZ	17W	1800	1392	3000K	24"	6"	3-1/8"	15-5/16"
PCV362500L30SN	PCV362500L30BZ	25W	2700	2086	3000K	36"	6"	3-1/8"	26-3/4"
PCV483400L30SN	PCV483400L30BZ	34W	3600	2982	3000K	48"	6"	3-1/8"	38-3/4"

*Special Order - consult factory for MOQ and lead time.