



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



Ideal LED Contemporary Oval PIDF Series

Features

Contemporary framed oval ceiling mount with a metal trim band.
 Ideal use in kitchens, hallways, and anywhere general lighting is needed.
 Provides lighting in residential, commercial and hospitality applications.
 Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes and hardware included. The canopy fits over a standard junction box.
 Power supply connections must be made inside a junction box (not included).

Finish

Housing is finished in lighting grade white baked gloss enamel paint. Trim ring is Satin Nickel finish.

Diffuser

Diffuser is smooth white acrylic.

Electrical

Input 120-277 VAC 60 HZ.
 Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.
 TRIAC and ELV dimming only at 120 VAC.

Lamping

Integrated LED modules capable of producing:
 32W = 2400 delivered lumens
 Adjustable 2700K, 3000K, 3500K, 4000K, 5000K (CCT).
 50,000 hr. LED life, 90 CRI.


Certification

All fixtures are cETLus listed for indoor damp locations.
 Title 24/JA8 compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase

**Specifications and dimensions
 subject to change without notice.**

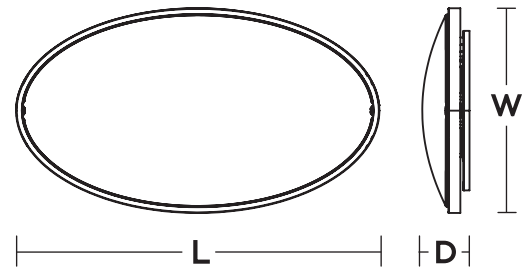

Ordering Information:

Satin Nickel	LED	Delivered Lumens	Adjustable CCT	L	W	D
PIDF3217LAJUDSN	32W	2400	2700K/3000K/3500K/4000K/5000K	32-1/4"	18-1/4"	4-1/4"