



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Palmetto Overbed PLB

Features

These are institutional bed light fixtures which allow individual control of light output. The fixture is equipped with a night light and dual ballasts to enable flexible switching. Switching options are either a 4-position switch or a wall switch field wired to the top lamp and an on/off pull switch wired to bottom lamp(s). The fixture is available in Faux Alabaster in 3' or 4' lengths.

Construction

The housing is die formed from 22-gauge steel and is provided with standard mounting holes and wiring access.

Finish

Housing is finished in lighting grade white baked gloss enamel paint. Decorative frame is made from Faux Alabaster acrylic.

Diffuser

The front diffuser is made of cast acrylic .22" thick and is glued to upper and lower diffusers. The upper diffuser is made of clear acrylic, .110" thick and is frosted on the inside. The lower diffuser is made from white acrylic and is .09" thick. Frame is held in place by two thumbscrews from the topside.

Electrical

This unit is wired with two UL listed electronic high power factor instant start ballasts for one up, two down T8 lamps at 120V- 50/60 Hz AC operation. Four position, three circuit pull switch (on up, on down, on both, all off) are standard and located toward the right end. LED nightlight and on/off pull switch is included.

Lamping

For use with 3/25 or 3/32 Watt T8 linear fluorescent lamps; supplied by others.



Certification

cULus listed for damp locations.

Options

120-277V universal voltage available without switch and nightlight.

**Limited Quantities Remain.
Consult Factory.**

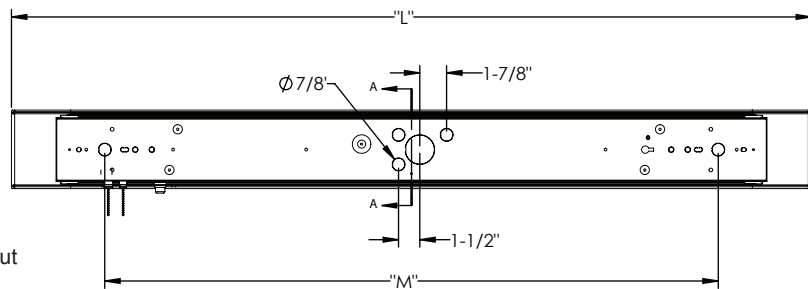

Ordering Information

Model No.	Lamps		Dimensions			
	Qty	Type	H	L	D	M
PLB325ALE8	3	25W T8	5-1/4"	42-1/4"	5-1/8"	29-1/2"
PLB332ALE8	3	32W T8	5-1/4"	54-1/4"	5-1/8"	41-1/2"

Specifications and dimensions subject to change without notice.